


Please note that the data given here has been taken from the online catalog. Please refer to the user documentation for comprehensive information and data. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

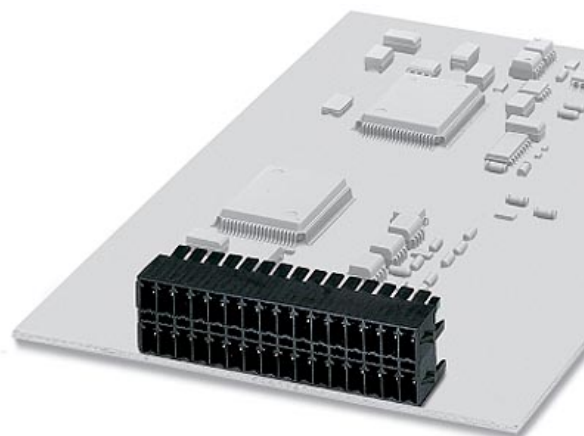

Headers with engagement nose, 3.5 mm pitch, pin length 2.6 mm, plug-in direction parallel to the PCB

The illustration shows a 16-position version

Order No.	1953415
Ord designation	MCDN 1,5/ 3-G1-3,5 RNP26THR

EAN	4017918919443
Pack	50 Pcs.
Customs tariff	85369010
Catalog page information	Page 103 (CC-2005)

► Technical data

Dimensions / positions


Length	13.3 mm
Height	15.2 mm
Pitch	3.5 mm
Dimension a	7 mm
Number of positions	3
Pin dimensions	0,8 x 0,8 mm
Pin spacing	3.5 mm
Hole diameter	1.3 mm

Technical data


Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	200 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	6 A
Nominal voltage U_N	160 V
Maximum load current	6 A (per position)
Insulating material	LCP
Inflammability class acc. to UL 94	V0

► Drawings

Drilling diagram



Dimensioned drawing



► Accessories

Item	Designation	Description
Marking		
0805030	SK 3,5/2,8:SO	Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 14 identical marker strips per card, max. 25-position labeling per strip.
0804109	SK 3,81/2,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 140 terminal blocks

Plug/Adapter

1734634	CP-MSTB	Coding section, is inserted into the slot on the plug or inverted header, red insulating material
---------	---------	---

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>

Phoenix Contact
Technical modifications reserved;