


Please note that the data given here has been taken from the online catalog. Please refer to the user documentation for comprehensive information and data. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

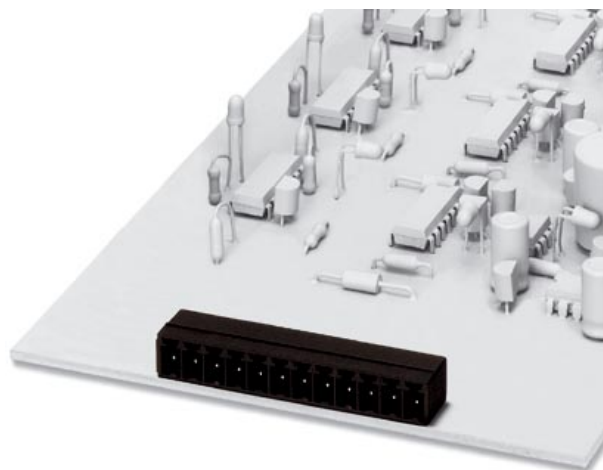

Headers, 3.5 mm pitch, color: black, plug-in direction parallel to the PCB

The illustration shows a 12-position version

Order No.	1937512
Ord designation	MC 1,5/ 4-G-3,5 THT

EAN	4017918853709
Pack	50 Pcs.
Customs tariff	85369010
Catalog page information	Page 92 (CC-2005)

► Technical data

Dimensions / positions

Pitch	3.5 mm
Dimension a	10.5 mm
Number of positions	4
Pin dimensions	0,8 x 0,8 mm
Hole diameter	1.2 mm

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Nominal voltage U_N	160 V
Maximum load current	8 A (per position)
Insulating material	PA-F
Inflammability class acc. to UL 94	V0

► Certificates

Certificate logos



CUL



Nominal voltage U_N	300 V
Nominal current I_N	8 A

UL


Nominal voltage U_N	300 V
Nominal current I_N	8 A

► Drawings



Application drawing



Drilling diagram



Dimensioned drawing



► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>

Phoenix Contact
Technical modifications reserved;