

Notes:

- 1) 0.031" Thick 2 Layer Scored Panel
- 2) RoHS Compliant FR4 material /w 1oz. copper
- 3) Add White Silk Screen Over Tented Vias
- 4) Green Solder Mask Both Sides
- 5) Panel Fiducial is 75mil D SMT round pad on both sides of PCB with 150mil D solder mask clearance

| Symbol | Hit Count | Tool Size | Plated | Hole Type |
|----------|-----------|------------------|--------|-----------|
| □ | 20 | 12mil (0.3048mm) | PTH | Round |
| v | 6 | 28mil (0.7112mm) | PTH | Round |
| o | 2 | 33mil (0.8382mm) | PTH | Round |
| 28 Total | | | | |

Active Wave

ENGINEER: JCM II

PHONE:

DRAWN by : JCM II

PHONE:

FILE NAME:

TITLE: TAG201


Approval

REV: 4.0

DATE: 04/09/2012

LAYER: 1

GERBER:

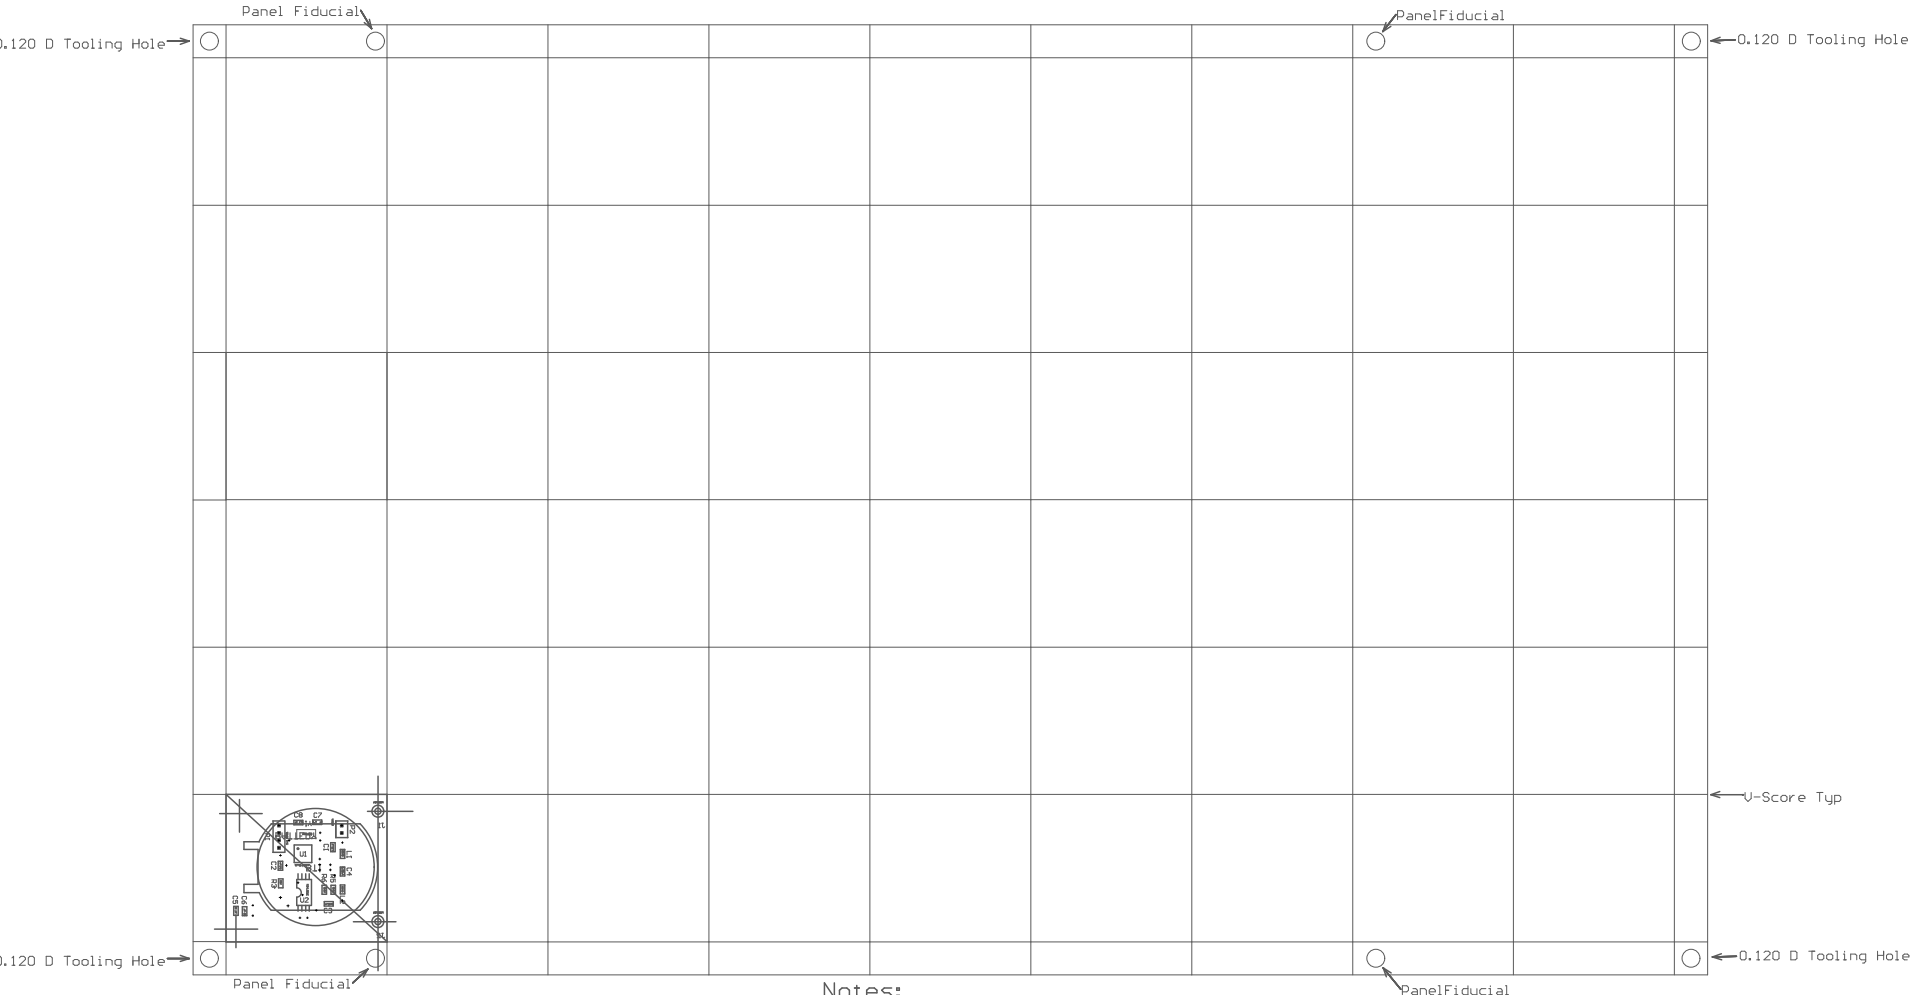

Notes:

- 1) 0.031" Thick 2 Layer Scored Panel
- 2) RoHS Compliant FR4 material w/ 1oz. copper
- 3) Add White Silk Screen Over Tented Vias
- 4) Green Solder Mask Both Sides
- 5) Panel Fiducial is 75mil D SMT round pad on both sides of PCB with 150mil D solder mask clearance

| | | | |
|-------------------|---------------|----------|------------------|
| Active Wave | | | |
| ENGINEER: JCM II | TITLE: TAG201 | | |
| PHONE: | | | |
| DRAWN by : JCM II | Approval | REV: 4.0 | DATE: 04/09/2012 |
| PHONE: | | | |
| FILE NAME: | LAYER: 1 | GERBER: | |