

TOP COPPER

- * NEED UL LOGO & DATE CODE * 54-UP PER PANEL WITH SCORING * 0.031" THICKNESS * PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY * FOLLOW L60.GBR (OUTLINE) FOR PANEL


BOTTOM COPPER

^{*} NEED UL LOGO & DATE CODE * 54-UP PER PANEL WITH SCORING * 0.031" THICKNESS * PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY * FOLLOW L60.GBR (OUTLINE) FOR PANEL

• •			•
• •			
		• • • • • • • • • • • • • • • • • • • •	
•			•

TOP MASK

* NEED UL LOGO & DATE CODE * 54-UP PER PANEL WITH SCORING * Ø.031" THICKNESS * PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY * FOLLOW L60.GBR (OUTLINE) FOR PANEL

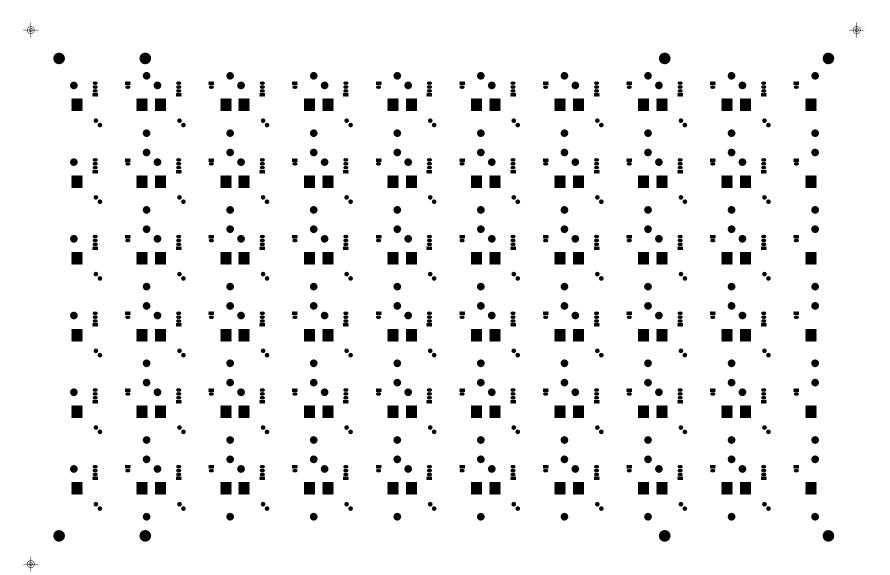

BOTTOM MASK

- * NEED UL LOGO & DATE CODE * 54-UP PER PANEL WITH SCORING * Ø.031" THICKNESS * PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY * FOLLOW L60.GBR (OUTLINE) FOR PANEL

-

-

TOP SILK

NEED UL LOGO & DATE CODE 54-UP PER PANEL WITH SCORING 0.031" THICKNESS PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY FOLLOW L60.GBR (OUTLINE) FOR PANEL

•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	
	•				•	•	•		
•		•	•	•	•		•		
•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	


TOP PASTE

^{*} NEED UL LOGO & DATE CODE * 54-UP PER PANEL WITH SCORING * 0.031" THICKNESS * PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY * FOLLOW L60.GBR (OUTLINE) FOR PANEL

•	•.	•.	•.	•.	•.	•.	•.	•.	•
	•	•	•	•	•	•	•	•	•
•	•.	• •	•.	• •	• •	• •	• •	• •	•
	•	•	•	•	•	•	•	•	•
•	•.	•	•.	• •	• •	• •	• •	•	•
	•	•	•	•	•	•	•	•	•
•	•.	•	•.	• •	• •	• •	• •	•	•
	•	•	•	•	•	•	•	•	•
•	•.	• •	•.	• •	• •	• •	• •	• •	•
	•	•	•	•	•	•	•	•	•
•	•.	• •	•.	• •	• •	• •	• •	• •	•
	•	•	•	•	•	•	•	•	•

BOTTOM PASTE

^{*} NEED UL LOGO & DATE CODE * 54-UP PER PANEL WITH SCORING * 0.031" THICKNESS * PANEL DRW IS NOT SCALED, IT IS FOR REFERENCE ONLY * FOLLOW L60.GBR (OUTLINE) FOR PANEL

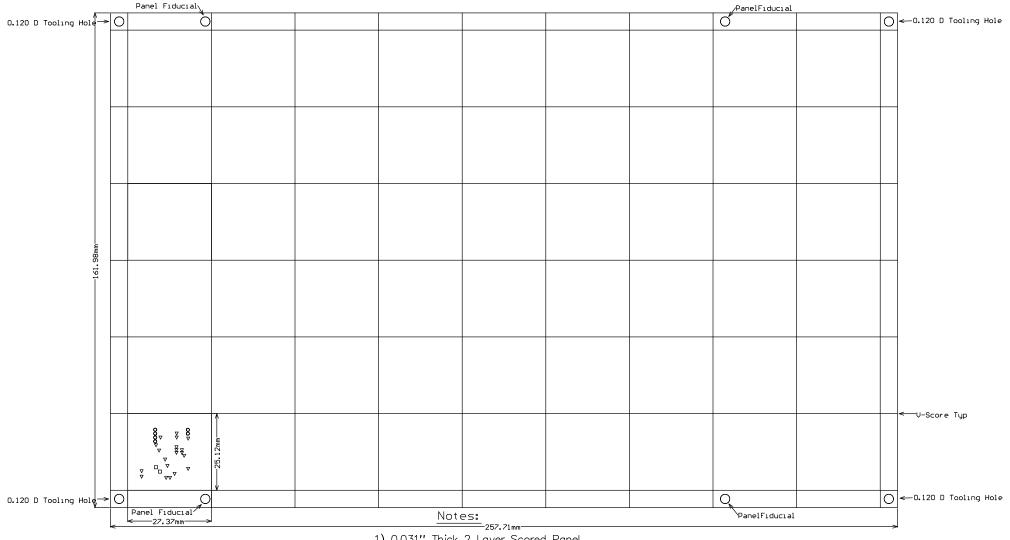

- 1) 0.031" Thick 2 Layer Scored Panel
- 2) RoHS Compliant FR4 material /w 1oz. copper
- 3) Add White Silk Screen Over Tented Vias
- 4) Green Solder Mask Both Sides
- 5) Panel Fiducial is 75mil D SMT round pad on both sides of PCB with 150mil D solder mask clearance

Γ	Symbol	H ₁ t	Count	Tool	Size	Plated	Hole	Type
Г	∇	20		12m11	(O. 3048mm)	PTH	Round	
	0	6		28m11	(O.7112mm)	PTH	Round	
		2		33m1l	(0.8382mm)	PTH	Round	
г		28	Total					

PANEL DRW
* NEED UL LOGO & DATE CODE
* 54-UP PER PANEL WITH SCORING
* 0.031" THICKNESS
* PANEL DRW IS NOT SCALED,
IT IS FOR REFERENCE ONLY
* FOLLOW LEW GBR (OUTLINE) FOR PANEL

					\Box

OUTLINE

* NEED UL LOGO & DATE CODE

* 54-UP PER PANEL WITH SCORING

* 0.031" THICKNESS

* PANEL DRW IS NOT SCALED,
IT IS FOR REFERENCE ONLY

* FOLLOW L60.GBR (OUTLINE) FOR PANEL

	. i i i i i i i i i i i i i i i i i i i				1 · 1 · 1 · 1 · 1 · 1 · 1 · 1 · 1 · 1 ·			• • • • • • • • • • • • • • • • • • •
	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	• • i.e.	• • • • • • • • • • • • • • • • • • •	• • • •	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •
• • • • • • • • • • • • • • • • • • •	•	•					•	• • • • • • • • • • • • • • • • • • •
	• • • • • • • • • • • • • • • • • • •	•	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	•		• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •
• • • • • • • • • • • • • • • • • • •					• • • • • • • • • • • • • • • • • • •	i. : i.		• • • • • • • • • • • • • • • • • • •