

## 1. Description


### 1.1. Project

Project Name	PM2
Board Name	PM2.5
Generated with:	STM32CubeMX 4.18.0
Date	02/01/2017

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

## 2. Pinout Configuration

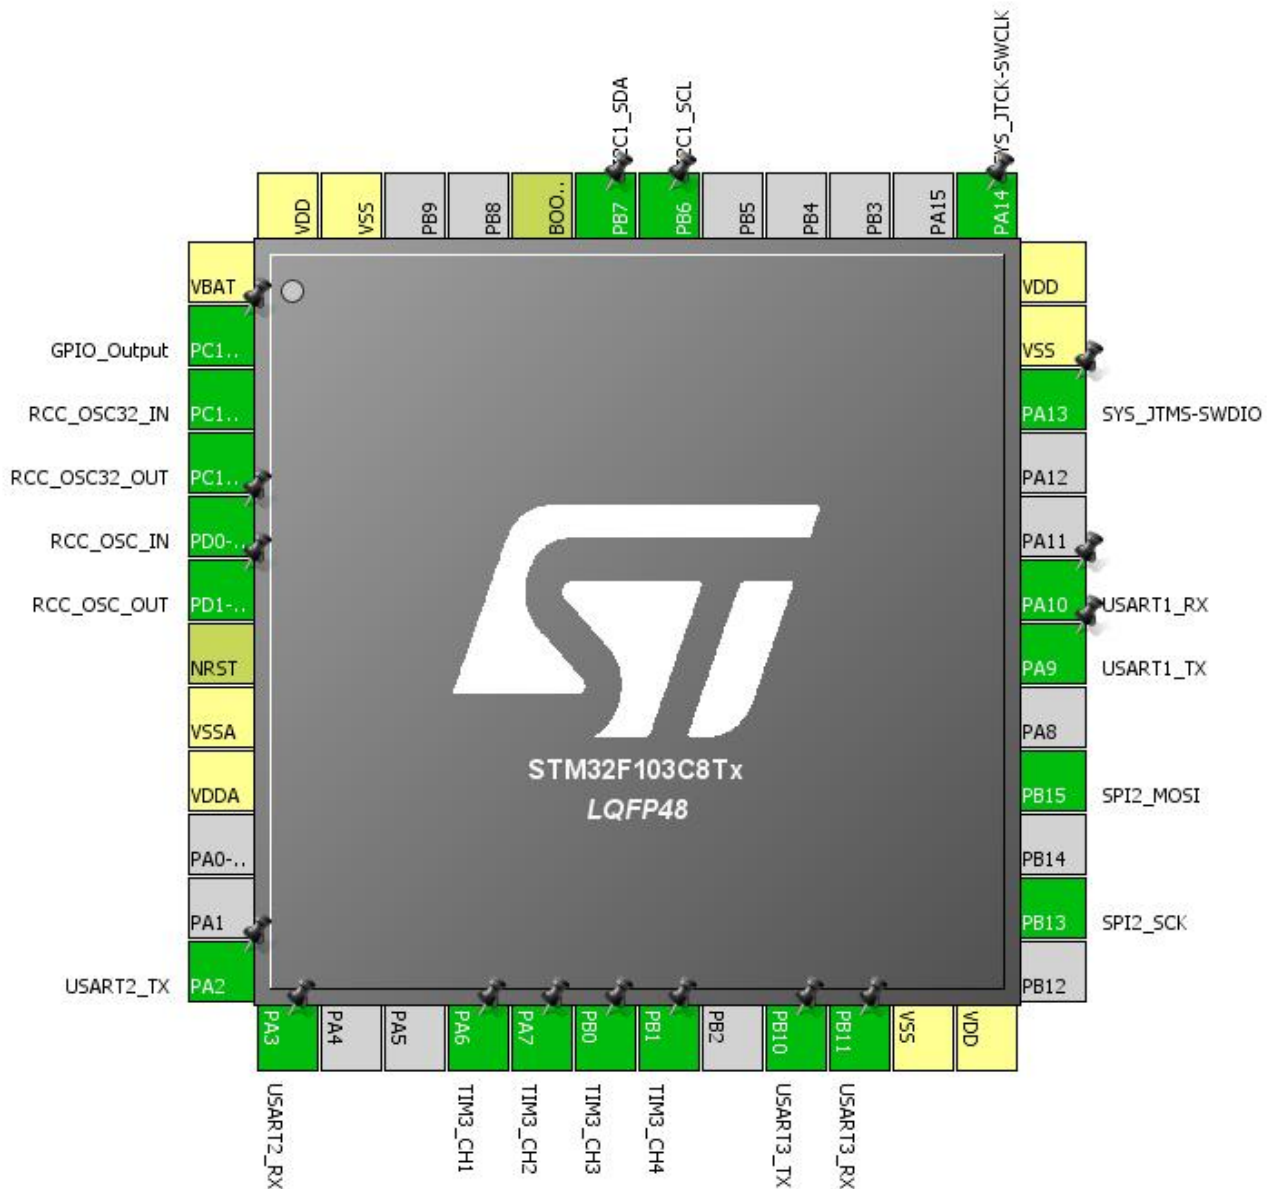


### 3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
12	PA2	I/O	USART2_TX	
13	PA3	I/O	USART2_RX	
16	PA6	I/O	TIM3_CH1	
17	PA7	I/O	TIM3_CH2	
18	PB0	I/O	TIM3_CH3	
19	PB1	I/O	TIM3_CH4	
21	PB10	I/O	USART3_TX	
22	PB11	I/O	USART3_RX	
23	VSS	Power		
24	VDD	Power		
26	PB13	I/O	SPI2_SCK	
28	PB15	I/O	SPI2_MOSI	
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

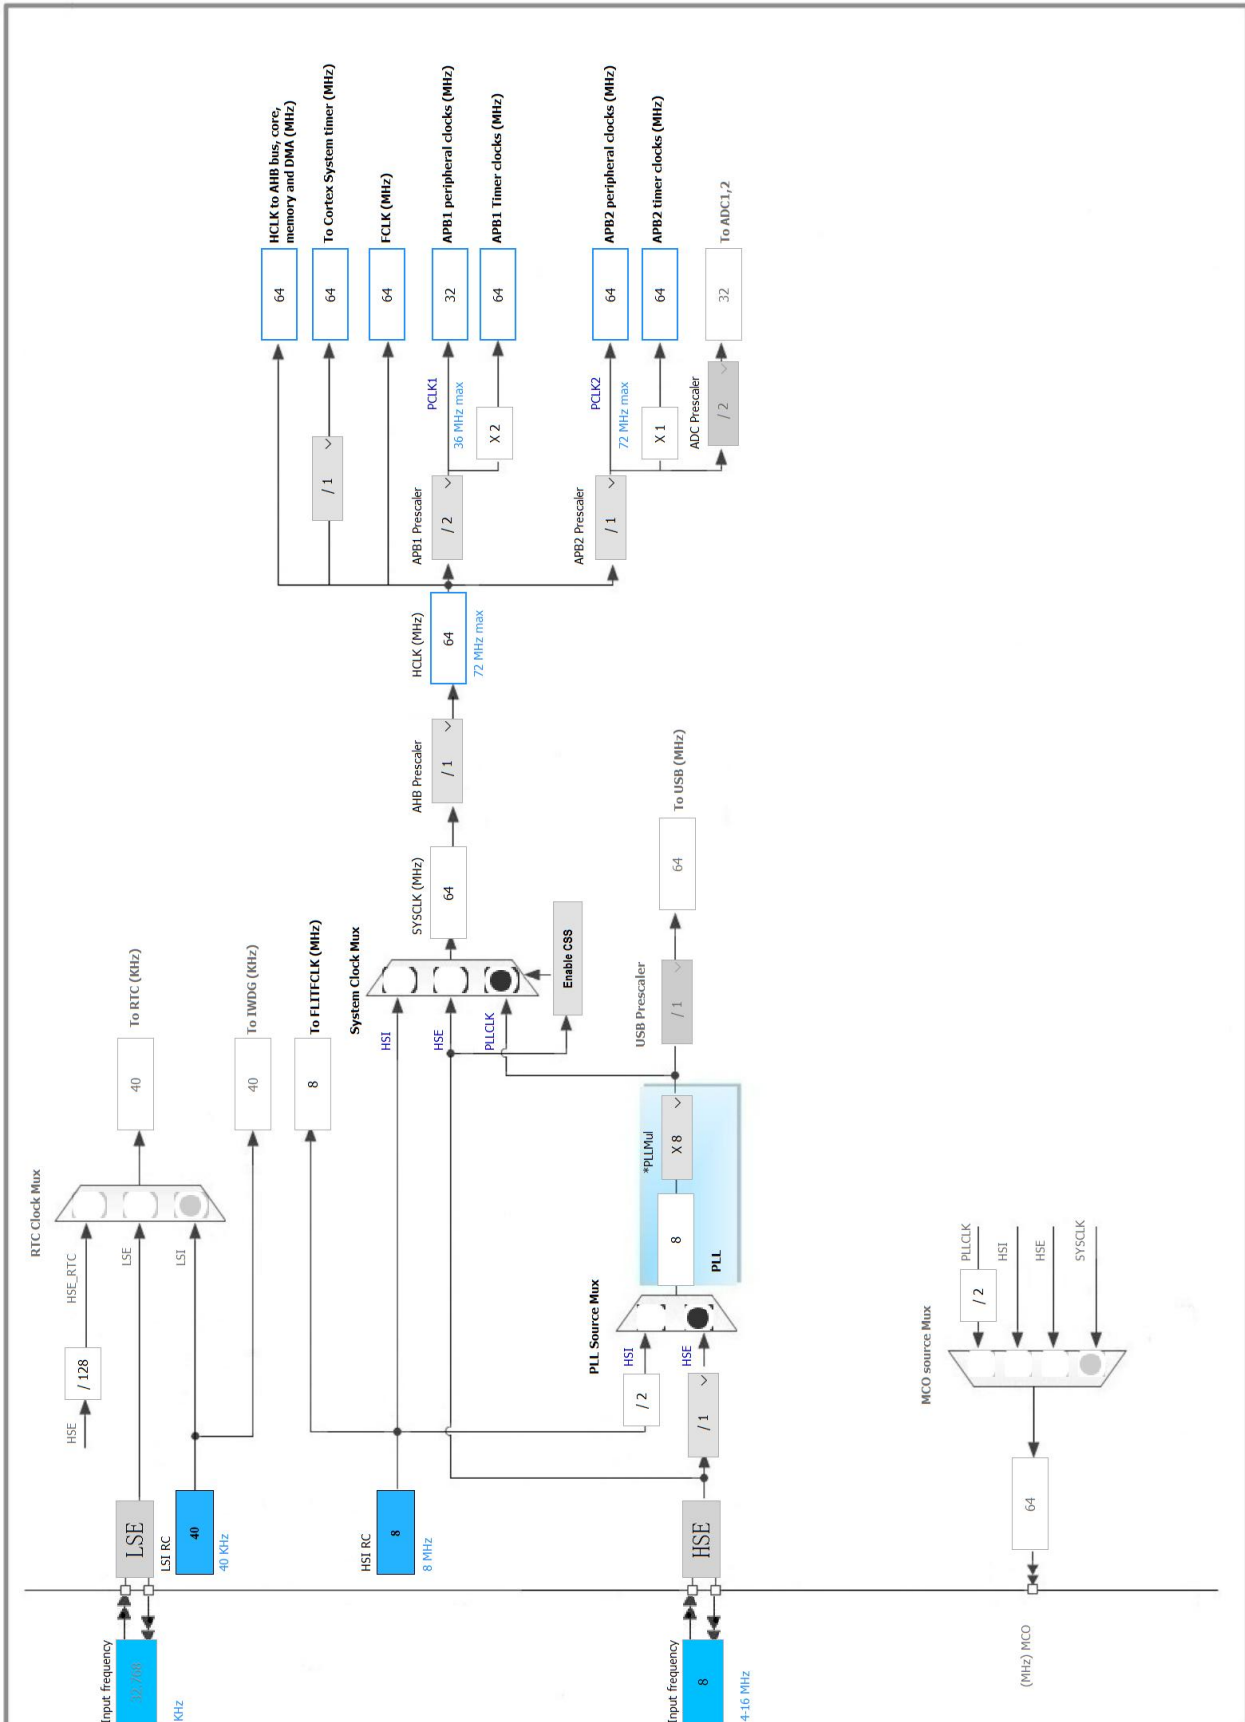

## 5. IPs and Middleware Configuration

### 5.1. I2C1

#### I2C: I2C

##### 5.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

##### 5.2.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.3. SPI2

## Mode: Transmit Only Master

### 5.3.1. Parameter Settings:

#### Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

#### Clock Parameters:

Prescaler (for Baud Rate)	<b>16 *</b>
Baud Rate	<b>2.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

#### Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

## 5.4. SYS

### Debug: Serial Wire

Timebase Source: SysTick

## 5.5. TIM3

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

Channel3: PWM Generation CH3

Channel4: PWM Generation CH4

### 5.5.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	0
Internal Clock Division (CKD)	No Division

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

#### **PWM Generation Channel 1:**

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

#### **PWM Generation Channel 2:**

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

#### **PWM Generation Channel 3:**

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

#### **PWM Generation Channel 4:**

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

## **5.6. USART1**

**Mode: Asynchronous**

### **5.6.1. Parameter Settings:**

#### **Basic Parameters:**

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### **Advanced Parameters:**

Data Direction	Receive and Transmit
Over Sampling	16 Samples

## **5.7. USART2**

## Mode: Asynchronous

### 5.7.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	<b>9600 *</b>
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

## 5.8. USART3

## Mode: Asynchronous

### 5.8.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	<b>9600 *</b>
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value



## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	High *	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	n/a	High *	
	PB15	SPI2_MOSI	Alternate Function Push Pull	n/a	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM3	PA6	TIM3_CH1	Alternate Function Push Pull	n/a	Low	
	PA7	TIM3_CH2	Alternate Function Push Pull	n/a	Low	
	PB0	TIM3_CH3	Alternate Function Push Pull	n/a	Low	
	PB1	TIM3_CH4	Alternate Function Push Pull	n/a	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	High *	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	n/a	
USART3	PB10	USART3_TX	Alternate Function Push Pull	n/a	High *	
	PB11	USART3_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	n/a	Low	

## **6.2. DMA configuration**

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART1 global interrupt	true	0	0
USART2 global interrupt	true	0	0
USART3 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM3 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI2 global interrupt	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	PM2.5
Project Folder	\\Mac\Home\Desktop\PM2.5\PM2.5
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.4.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No