

WEB FLASHER

Flash your node

Install MeshCore firmware onto your supported LoRa device straight from the browser. Pick a firmware, pick a device, and connect over Web Serial.

1 • Choose firmware

Select which firmware family you want to install.



Ripple Firmware

Freemium firmware by Ripple Radios

SELECTED



MeshOS Firmware

Freemium firmware by Andy Kirby



Community Firmware

Open Source firmware on GitHub

2 • Choose device

Filter supported devices, then launch the flasher for that board.

Q

Filter devices...



SEEDSTUDIO

Wio Tracker L1 Pro


 LAUNCH FLASHER



ELECROW

ThinkNode M1

 LAUNCH FLASHER

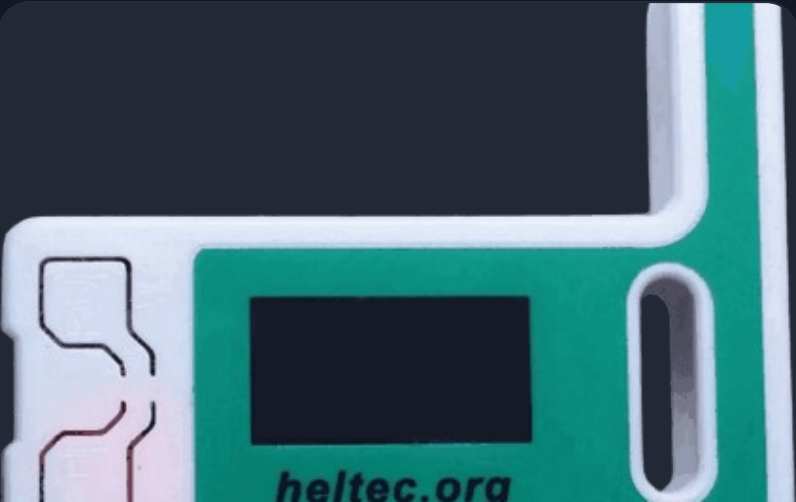

HELTEC AUTOMATION


Heltec v3

 LAUNCH FLASHER



RAKWIRELESS

WisMesh Pocket

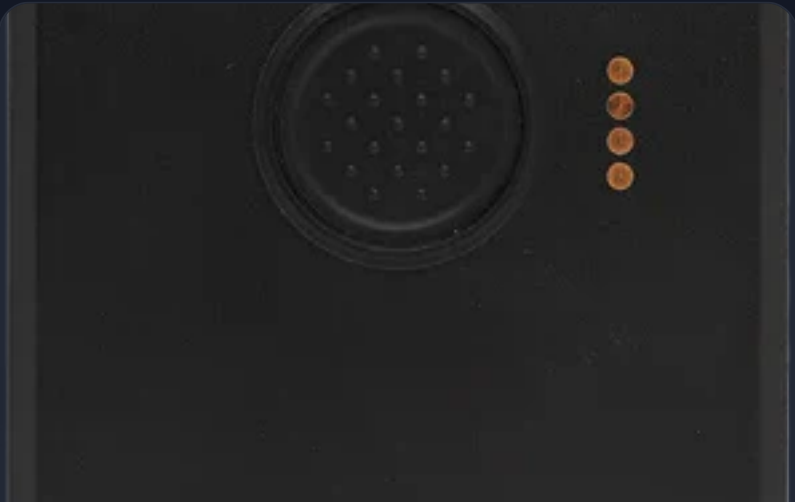

RAKWIRELESS


WisMesh Tag



SEEDSTUDIO

SenseCAP Solar Node P1 Pro

 LAUNCH FLASHER

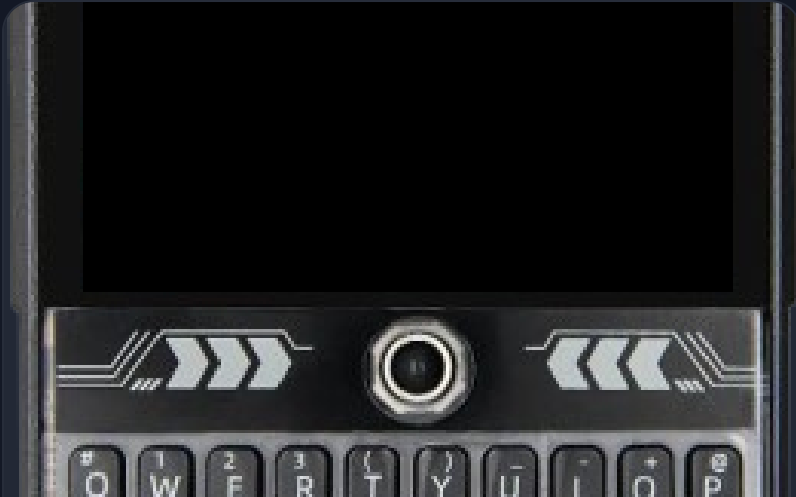

LILYGO

T-Deck Plus

 LAUNCH FLASHER

 LAUNCH FLASHER



LILYGO

T-Deck Pro

 LAUNCH FLASHER

 LAUNCH FLASHER



LILYGO

T-LoRa Pager

 LAUNCH FLASHER



LILYGO

T-Watch S3 Plus

 LAUNCH FLASHER



Before you flash

- Use Chrome or Edge on desktop — Web Serial API is required.
- Do **not** carry out a full erase if you are simply updating; it erases your MeshCore identity.
- Enter DFU mode before erasing if you did not trigger it manually.



New to MeshCore?

Watch the tutorial on how to flash your device.

WATCH TUTORIAL

OFF-GRID · OPEN-SOURCE · ENCRYPTED