


¹ **Shenzhen LC Dynamics Technology Co., Ltd.**

Contact: Amy lee TEL: 86 0755 89661875 Email: sales7@manygoodmotors.com

Address: 1-19D03, Building 1, Central Residence, No.36 Lanzhu West Road,
Liuhe Community, Pingshan District, Shenzhen

Specification 规格书

Product name 产品名称	TT motor gear box 马达齿轮箱			
Output shaft 输出轴	D Metal Double-Shaft 金属双轴	Date 日期	2022-10-28	
Gear ratio 齿轮比	1:90	Model NO. 型号	MJ-22ZC-RJ00-001	

1	Conditions of Standard Operation 工作条件	
1.1	Suggested Voltage 建议使用电压	3.0V DC Constant between motor terminals 马达端子电压 3.0V~6V 流恒压
1.2	Direction of rotation 回转方向	Bi-directions 双向转动
1.3	Gear box position 齿轮箱的放置状态	All directions 所有方向
1.4	Storage Humidity Range with the exception of gear box 齿轮箱的存储湿度范围	30%~70%
1.5	Operation temperature range with the exception of gearbox 齿轮箱的工作温度范围	+10℃~+50℃
1.6	Storage temperature Range with the exception of gearbox 齿轮箱的存储温度范围	-10℃~+40℃


2	Gear box noise: 70dB (Max) 牙箱噪音: 70dB (Max)	Background noise: 35dB (Max) 环境噪音: 35dB (Max)
---	--	--

² **Shenzhen LC Dynamics Technology Co., Ltd.**

Contact: Amy lee TEL: 86 0755 89661875 Email: sales7@manygoodmotors.com

Address: 1-19D03, Building 1, Central Residence, No.36 Lanzhu West Road,
Liuhe Community, Pingshan District, Shenzhen

3 Dimension 尺寸:

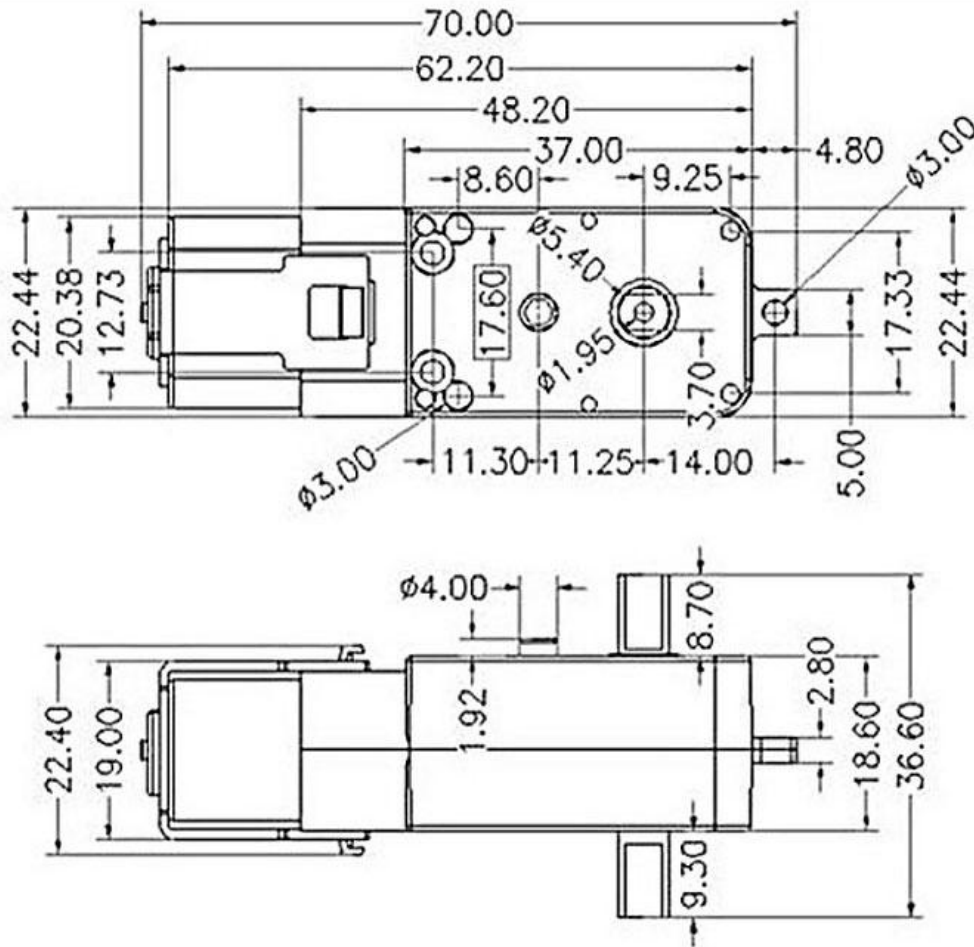

4	Life 寿命	
4.1	Load 负载	2.1mN.m
4.2	Environment 环境	25°C±5°C/65%±20% RH
4.3	Test Voltage: 测试电压	DC 3.0V
4.4	Test cycle 测试循环	The diagram shows a timing cycle for the motor. It consists of a 'CCW' (Counter-Clockwise) phase lasting 1H (1 hour) and an 'OFF' phase lasting 0.5H (0.5 hours). The total duration of one cycle is 1.5H. The label '1 Cycle' is placed below the OFF phase.
4.5	Life Expectancy 预期寿命	Text 208 cycle 实验进行 208 次循环


3 **Shenzhen LC Dynamics Technology Co., Ltd.**

Contact: Amy lee TEL: 86 0755 89661875 Email: sales7@manygoodmotors.com

Address: 1-19D03, Building 1, Central Residence, No.36 Lanzhu West Road,
Liuhe Community, Pingshan District, Shenzhen

5	Electrical Characteristics 电气性能 (DC 6V)	
5.1	No load Current 无负载电流	106mA
5.2	No load Speed 无负载速度	110±10% Rpm
5.3	Current under rated load 额定负载电流	115mA
5.4	Speed under rated load 额定负载转速	107±10% Rpm
5.5	Starting Voltage 起动电压	2.0V
5.6	Current by qualified test 检测牙箱合格电流	114mA (DC6V)

6. Characteristic curve of gear box 齿轮箱运转特性曲线图:

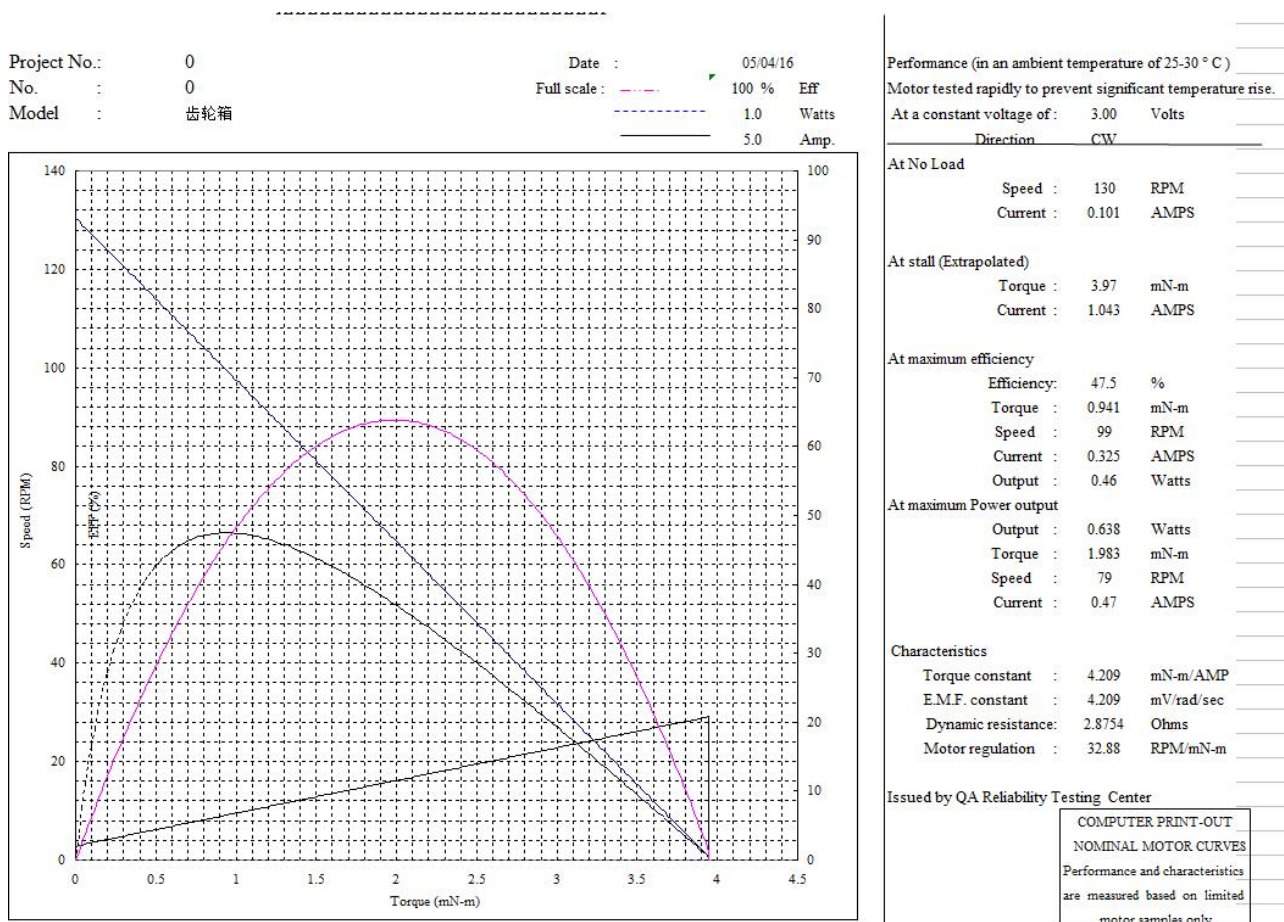


⁴ **Shenzhen LC Dynamics Technology Co., Ltd.**

Contact: Amy lee TEL: 86 0755 89661875 Email: sales7@manygoodmotors.com

Address: 1-19D03, Building 1, Central Residence, No.36 Lanzhu West Road,
Liuhe Community, Pingshan District, Shenzhen

7. Picture 产品图片

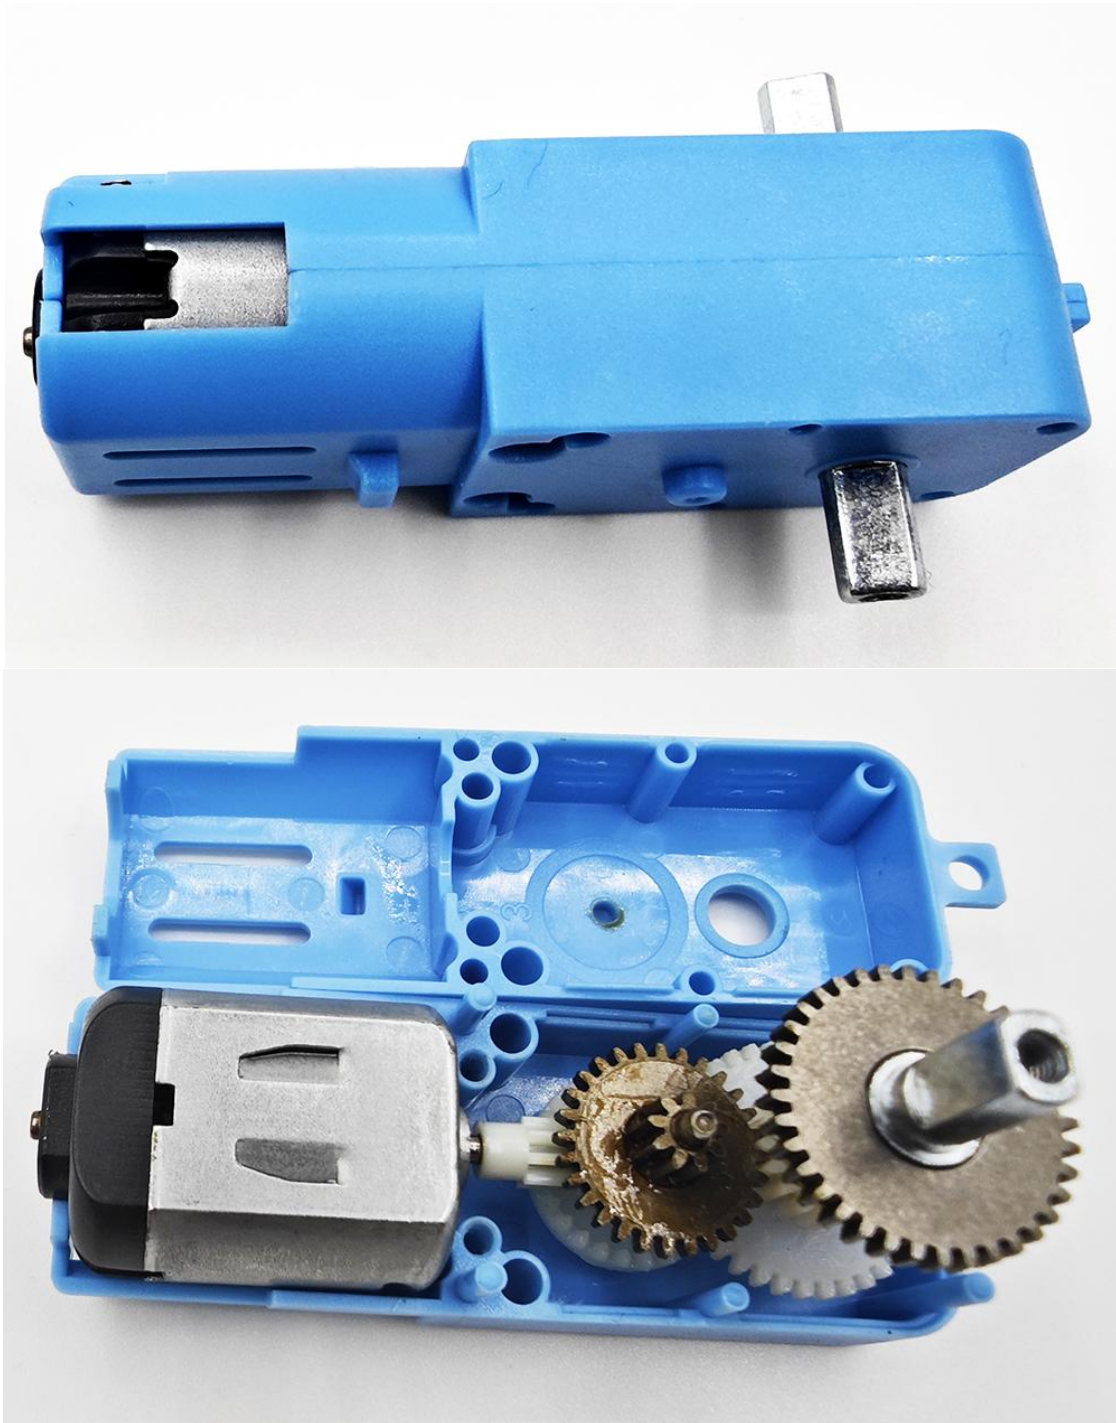

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Adafruit:](#)

[5857](#)