



COMPACT LWIR THERMAL CAMERA


FLIR Boson®



The Boson® longwave infrared (LWIR) thermal camera module sets the standard for size, weight, power, and performance (SWaP). Utilizing FLIR's advanced image processing and several industry-standard communication interfaces, Boson enables applications from firefighting to unmanned aerial vehicles and automotive development kits, all for as little as 800mW. The 12 μm pitch Vanadium Oxide (VOx) uncooled detector comes in two resolutions – 640 \times 512 or 320 \times 256. Both resolutions are available with multiple lens configurations, adding flexibility to integration programs. Radiometric models are also available with absolute temperature measurement in select configurations.

With a weight as low as 7.5 g and a camera body as small as 21 x 21 x 11 mm, the Boson represents an industry-leading reduction in SWaP with no reduction in performance. Advanced embedded processing and video analytics, as well as software-customizable functionality, give this small camera big capabilities, including integration with auxiliary sensors such as third-party cameras, GPS, and IMU.

www.flir.com/boson

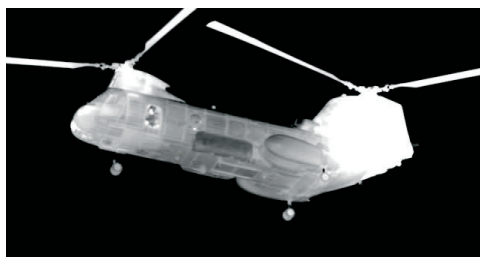

DRAMATIC REDUCTION IN SIZE, WEIGHT AND POWER (SWaP) WITH NO REDUCTION IN PERFORMANCE

A full-featured VGA thermal camera module at less than 4.9 cm³.

- 21 x 21 x 11 mm camera body and weight as low as 7.5 g
- Low power consumption, starting at 500 mW
- 12 μm pixel pitch VOx microbolometer with 320 and 640 resolutions
- Rugged construction and highest temperature rating -40°C to 80°C



POWERFUL INFRARED VIDEO PROCESSING ARCHITECTURE

FLIR infrared video processing with embedded industry-standard interfaces empowers advanced processing and analytics.

- Includes embedded algorithms for noise filters, gain control, blending, and more
- Software-customizable functionality for video processing and power dissipation requirements
- Built-in support for physical and protocol-level interface standards



WIDE CONFIGURABILITY FOR FASTER DEVELOPMENT AND LOWER COST-TO-MARKET

Unprecedented integration flexibility for fast, affordable developments.

- Customized applications through FLIR-trusted third party developers
- Mechanical/electrical compatibility across all versions
- Variety of hardware and image processing integration to fit OEM requirements

SPECIFICATIONS

Thermal Imager		FLIR Boson	
Sensor Technology	Uncooled VOx Microbolometer		
Array Format	320 × 256 or 640 × 512		
Pixel Pitch	12 µm		
Spectral Range	Longwave infrared: 7.5 µm – 14 µm		
Thermal Sensitivity	<40 mK (Industrial); <50 mK (Professional); <60 mK (Consumer)		
Radiometric Temperature Measure	Available in some models		
Full Frame Rate, Slow Frame Rate	60 Hz baseline; 30 Hz runtime selectable, ≤9 Hz available		
Non-uniformity Correction (NUC)	Factory calibrated; updated FFCs with FLIR Silent Shutterless NUC (SSN™)		
Solar Protection	Integral		
Continuous Electronic Zoom	2X zoom		
Symbol Overlay	Re-writable each frame; alpha blending for translucent overlay		
Optics			
Array Format	320 × 256	640 × 512	
Horizontal Field of View (HFOV); Effective Focal Length	92°; 2.3 mm	95°; 4.9 mm	
	50°; 4.3 mm	50°; 8.7 mm	
	34°; 6.3 mm	32°; 14 mm	
	24°; 9.1 mm	24°; 18 mm	
	16°; 14 mm	18°; 24 mm	
	12°; 18 mm	12°; 36 mm	
	6°; 36 mm	8.0°; 55 mm	
	4°; 55 mm	6°; 73 mm	
Physical Attributes			
Size	21 × 21 × 11 mm (0.83 x 0.83 x 0.43 in) without lens or 640-model shutter		
Weight	7.5 g (0.26 oz) without lens or 640-model shutter		
Precision Mounting Holes	Four tapped M160.35 (rear cover) Lens support recommended when lens mass exceeds 7.5 g		
Interfacing			
Input Voltage	3.3 VDC		
Power Dissipation (Peak)	Varies by configuration; as low as 500 mW		
Video Channels	CMOS or USB-2		
Control Channels	UART or USB		
Configurable GPIO	Up to 11; user configurable		
Environmental			
Operating Temperature Range	-40°C to 80°C (-40°F to 176°F)		
Non-Operating Temperature Range	-50°C to 105°C (-58°F to 221°F)		
Shock	1,500 g @ 0.4 msec		
Operational Altitude	12,192 m (40,000 ft)		

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.flir.com/boson

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
1201 S. Joyce Street
Suite C006
Arlington, VA 22202
USA

SANTA BARBARA
FLIR Systems, Inc.
6769 Hollister Ave.
Goleta, CA 93117
USA

EUROPE
FLIR Systems, Inc.
Luxemburgstraat 2
2321 Meer
Belgium

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2021 FLIR Systems, Inc. All rights reserved. Rev. 04/09/21

21-0286-OEM-Boson-Radiometry-Datasheet-LTR



The World's Sixth Sense®