ROYALOHM

C O N F I D E N T I A L D O C U M E N T

SPECIFICATION FOR APPROVAL

CORTEN LABS

Description : Thick Film Chip Resistors (Terminal Lead Free)

Royalohm Part no.:

0805S8xxxxxT5E (RMC 1/8W-S (0805) +/-1%, +/-5% T/R-5,000)

Approved by

Parts corresponding to RoHS Compliant: 2005-Apr.-1

Royal Electronic Factory (Thailand) Co., Ltd.
20/1-2 Moo 2 Klong-Na, Muang
Chachoengsao 24000, Thailand
Tel: +66-38-822404-8
Fax: +66 38-981190 / 823765
E-mail Address: Export sales: Export@royalohm.com
Local sales: Local@royalohm.com
http://www.royalohm.com

Approved	Checked	Prepared
Mr. Jack Lin	Ms. N. Phunnasa	Mrs. P. Duangdaw

Issue Date: 2013/06/17

CHANGE NOTIFICATION HISTORY			
Version	**Date of Version**	**History**	**Remark**
1	2013/06/17	1. Chip series (0805) @ 1/8W-S	
		2. Resistance tolerance: ±1%, ±5%	
		3. Temperature coefficient 1Ω-10Ω : ± 400 PPM/℃	
		11Ω-100Ω : ± 200 PPM/℃	
		>100Ω : ± 100 PPM/℃	

Customer: CORTEN LABS	**Part. No.: 0805S8xxxxxT5E**

1. Scope:

This specification for approval relates to Thick Film Chip Resistors (Terminal Lead Free) manufactured by ROYALOHM 's specifications.

2. Type designation:

The type designation shall be in the following form:

	Type	Power Rating	Resistance tolerance	Nominal Resistance
Ex.	RMC 0805	0.125W (1/8W-S)	F, J	82KΩ

3. Ratings:

Type	RMC 0805
Power Rating	0.125W at 70℃
Max. Working Voltage	150 V
Max. Overload Voltage	300 V
Temperature Range	-55℃～+155℃
Ambient Temperature	70 ℃

3.1 Power rating:

Resistors shall have a power rating based on continuous load operation at an ambient temperature of 70 ℃ . For temperature in excess of 70 ℃ , The load shall be derate as shown in figure 1.

Figure 1

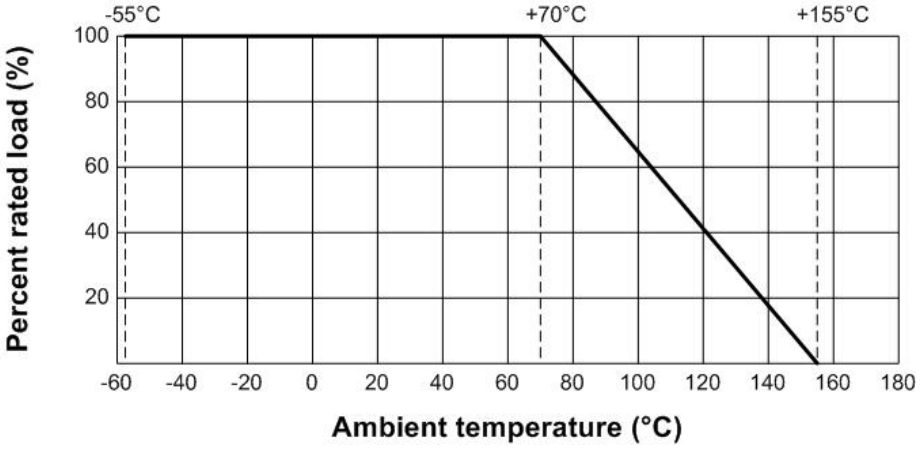

3.2 Nominal Resistance

Effective figures of nominal resistance shall be in accordance with E-24 and E-96 series. E-96 series for 1% and E-24 series for 2%, 5%.

Thick Film Chip Resistors (Terminal Lead Free)

4. Construction :

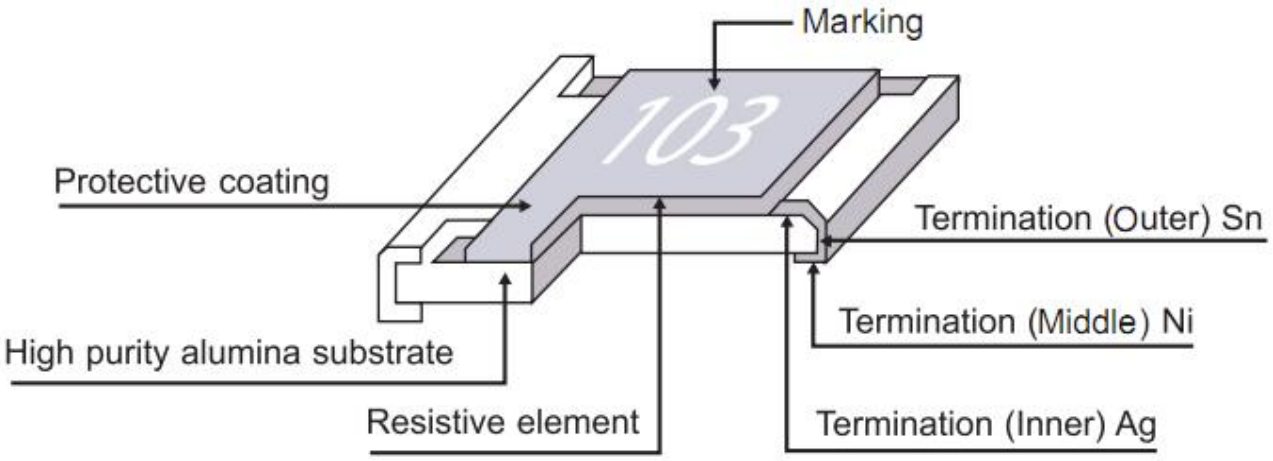

5. Power rating and dimensions

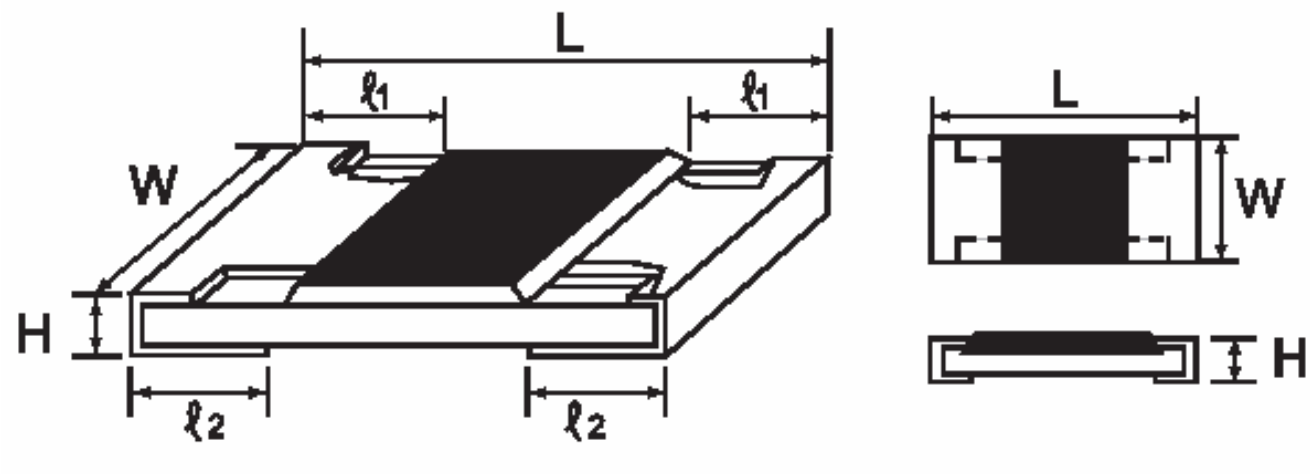

Dimension :

Type	Dimension (mm)				
	L ± 0.15	W + 0.15 - 0.10	H ± 0.10	ℓ1 ± 0.20	ℓ2 ± 0.20
RMC 0805	2.00	1.25	0.55	0.40	0.40

Power Rating :

Type	Power Rating at 70 ℃	Tolerance %	Resistance Range	Standard Series
RMC 0805	0.125W (1/8W-S)	± 1	10Ω ~ 1MΩ	E-96
		± 5	1Ω ~ 10MΩ	E-24

Thick Film Chip Resistors (Terminal Lead Free)

6. Marking :

6.1 Resistors

A. Marking for E-96 series in 0805 size : 4 Digits

*The first 3 digits are singnificant figures of resistance and the 4th digit denoted number of zeros.

Ex. | | 1003 | | 100KΩ

*For ohmic values below 100 Ω, letter"R" is for decimal point.

Ex. | | 1R80 | | 1.8Ω

B. Marking for E-24 series in 0805 size : 3 Digits

*The first 2 digits are singnificant figures of resistance and the 3rd digit denoted number of zeros.

Ex. | | 102 | | 1KΩ

*For ohmic values below 10 Ω, letter"R" is for decimal point.

Ex. | | R68 | | 0.68Ω

6.2 Labels

Label shall be marked with the following item :

A. Nominal Resistance and Resistance Tolerance
B. Power Rating and Size
C. Quantity
D. Part No.
E. P.O.No.
F. Lot No.

Ex.

ROYALOHM
CHIP RESISTOR

RESISTANCE: 82K Ω ± 5 %
WATTAGE: 1/8W-S SIZE: 0805
QUANTITY: 5,000 PCS Pb-Free
PART NO.:
P.O.NO.:
LOT NO. : 6050008 0805S8J0823T5E

Remark : Label is 82K, value is 82KΩ, marking is 823

Thick Film Chip Resistors (Terminal Lead Free)

7. Performance specification :

Characteristics	Limits	Test Methods (JIS C 5201-1)
Insulation resistance	1,000 MΩ or more	Apply 500V DC between protective coating and termination for 1 min, then measure (Sub-clause 4.6)
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down	Apply 500V AC between protective coating and termination for 1 minute (Sub-clause 4.7)
Temperature coefficient	1Ω-10Ω : ± 400 PPM/℃ 11Ω-100Ω : ± 200 PPM/℃ >100Ω : ± 100 PPM/℃	Natural resistance change per temp. degree centigrade. $\frac{R_2-R_1}{R_1(t_2-t_1)} \times 10^6$ (PPM/℃) R_1: Resistance value at room temperature (t1) R_2: Resistance value at room temp. plus 100 ℃ (t2) (Sub-clause 4.8)
Short time overload	Resistance change rate is ± 5% (2.0% + 0.1Ω) Max. ± 1% (1.0% + 0.1Ω) Max.	Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds (Sub-clause 4.13)
Solderability	95 % coverage Min.	Test temperature of solder : 245 ± 3℃ Dipping them solder : 2-3 seconds (Sub-clause 4.17)
Soldering temp. reference	Electrical characteristics shall be satisfied. Without distinct deformation in appearance. (95 % coverage Min.)	<u>Wave soldering condition:</u> (2 cycles Max.) Pre-heat : 100 ~ 120 ℃, 30 ± 5 sec. Suggestion solder temp.: 235 ~ 255 ℃, 10 sec. (Max.) Peak temp.: 260 ℃ <u>Reflow soldering condition:</u> (2 cycles Max.) Pre-heat : 150 ~ 180 ℃, 90 ~ 120 sec. Suggestion solder temp.: 235 ~ 255 ℃, 20 ~ 40 sec. Peak temp.: 260 ℃ 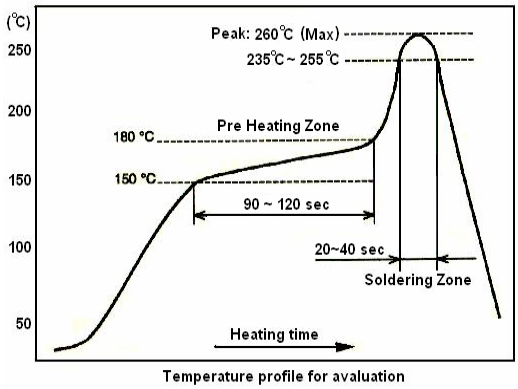 Temperature profile for avaluation <u>Hand soldering condition:</u> The soldering iron tip temperature should be less than 300℃and maximum contract time should be 5 sec.

Thick Film Chip Resistors (Terminal Lead Free)

7. Performance specification :

Characteristics	Limits	Test Methods (JIS C 5201-1)
Soldering Heat	Resistance change rate is: ±(1%+0.05Ω) Max.	Dip the resistor into a solder bath having a temperature of 260°C±3°C and hold it for 10±1 seconds. (Sub-clause 4.18)
Temperature cycling	Resistance change rate is ± 5% (1.0% + 0.05Ω) Max. ± 1% (0.5% + 0.05Ω) Max.	Resistance change after continuous 5 cycles for duty cycle specified below :

Step	Temperature	Time
1	-55℃ ± 3℃	30 mins
2	Room temp.	10～15 mins
3	+155℃ ± 2℃	30 mins
4	Room temp.	10～15 mins

(Sub-clause 4.19)

Load life in humidity	Resistance change rate is ± 5% (3.0% + 0.1Ω) Max. ± 1% (1.0% + 0.1Ω) Max.	Resistance change after 1,000 hours (1.5 hours "on", 0.5 hour "off") at RCWV in a humidity chamber controlled at 40℃ ± 2℃ and 90 to 95 % relative humidity (Sub-clause 4.24.2.1)
Load Life	Resistance change rate is ± 5% (3.0% + 0.1Ω) Max. ± 1% (1.0% + 0.1Ω) Max.	Permanent resistance change after 1,000 hours operating at RCWV, with duty cycle of (1.5 hours"on", 0.5 hour"off") at 70℃ ± 2℃ ambient (Sub-clause 4.25.1)
Terminal bending	Resistance change rate is ± (1.0% + 0.05Ω) Max.	Twist of Test Board : Y/X = 5/90 mm for 10 seconds (Sub-clause 4.33)

Thick Film Chip Resistors (Terminal Lead Free)

8. Packing specification :

* Taping Dimension (mm)

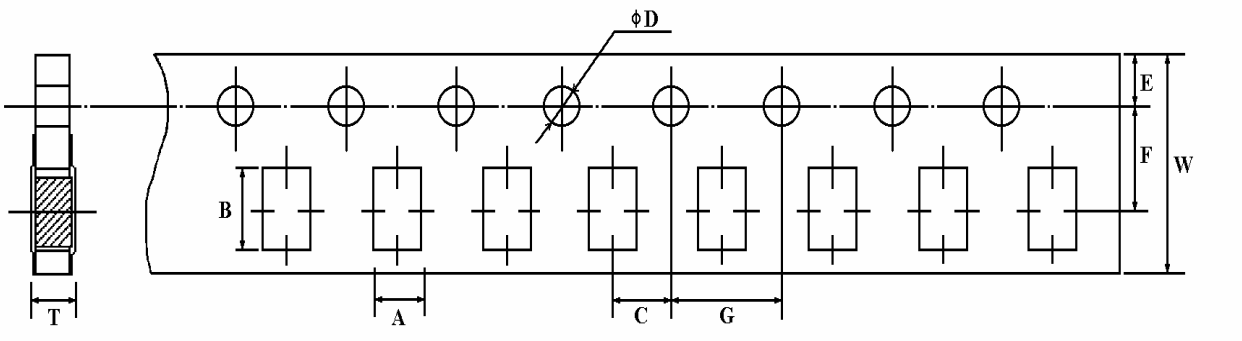

Type	A ± 0.2	B ± 0.2	C ± 0.05	ϕ D +0.1 - 0	E ± 0.1	F ± 0.05	G ± 0.1	W ± 0.2	T ± 0.1
RMC 0805	1.65	2.4	2.0	1.5	1.75	3.5	4.0	8.0	0.81

* Reel Dimension (mm)

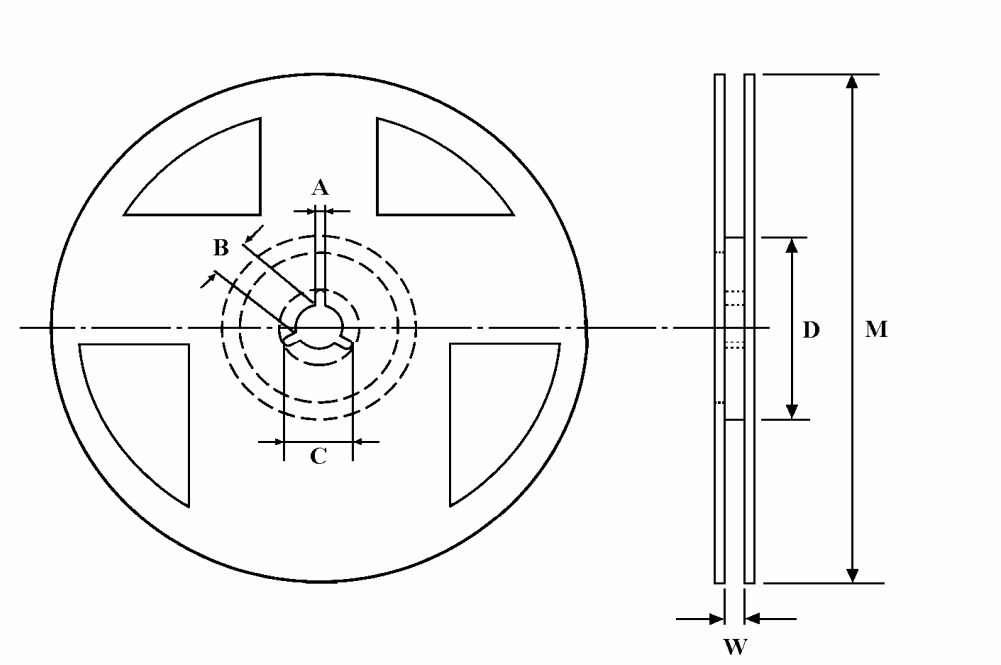

Type	Quantity Per Reel	A ± 0.5	B ± 0.5	C ± 0.5	D ± 1	M ± 2	W ± 1
RMC 0805	5,000 pcs.	2	13	21	60	178	10

Remark : φ M 10,000pcs. / Reel = 255 ± 2mm

20,000pcs. / Reel = 330 ± 2mm

Part Number System

Explanation of Part Number System

Thick Film Chip Resistors (Terminal Lead Free)

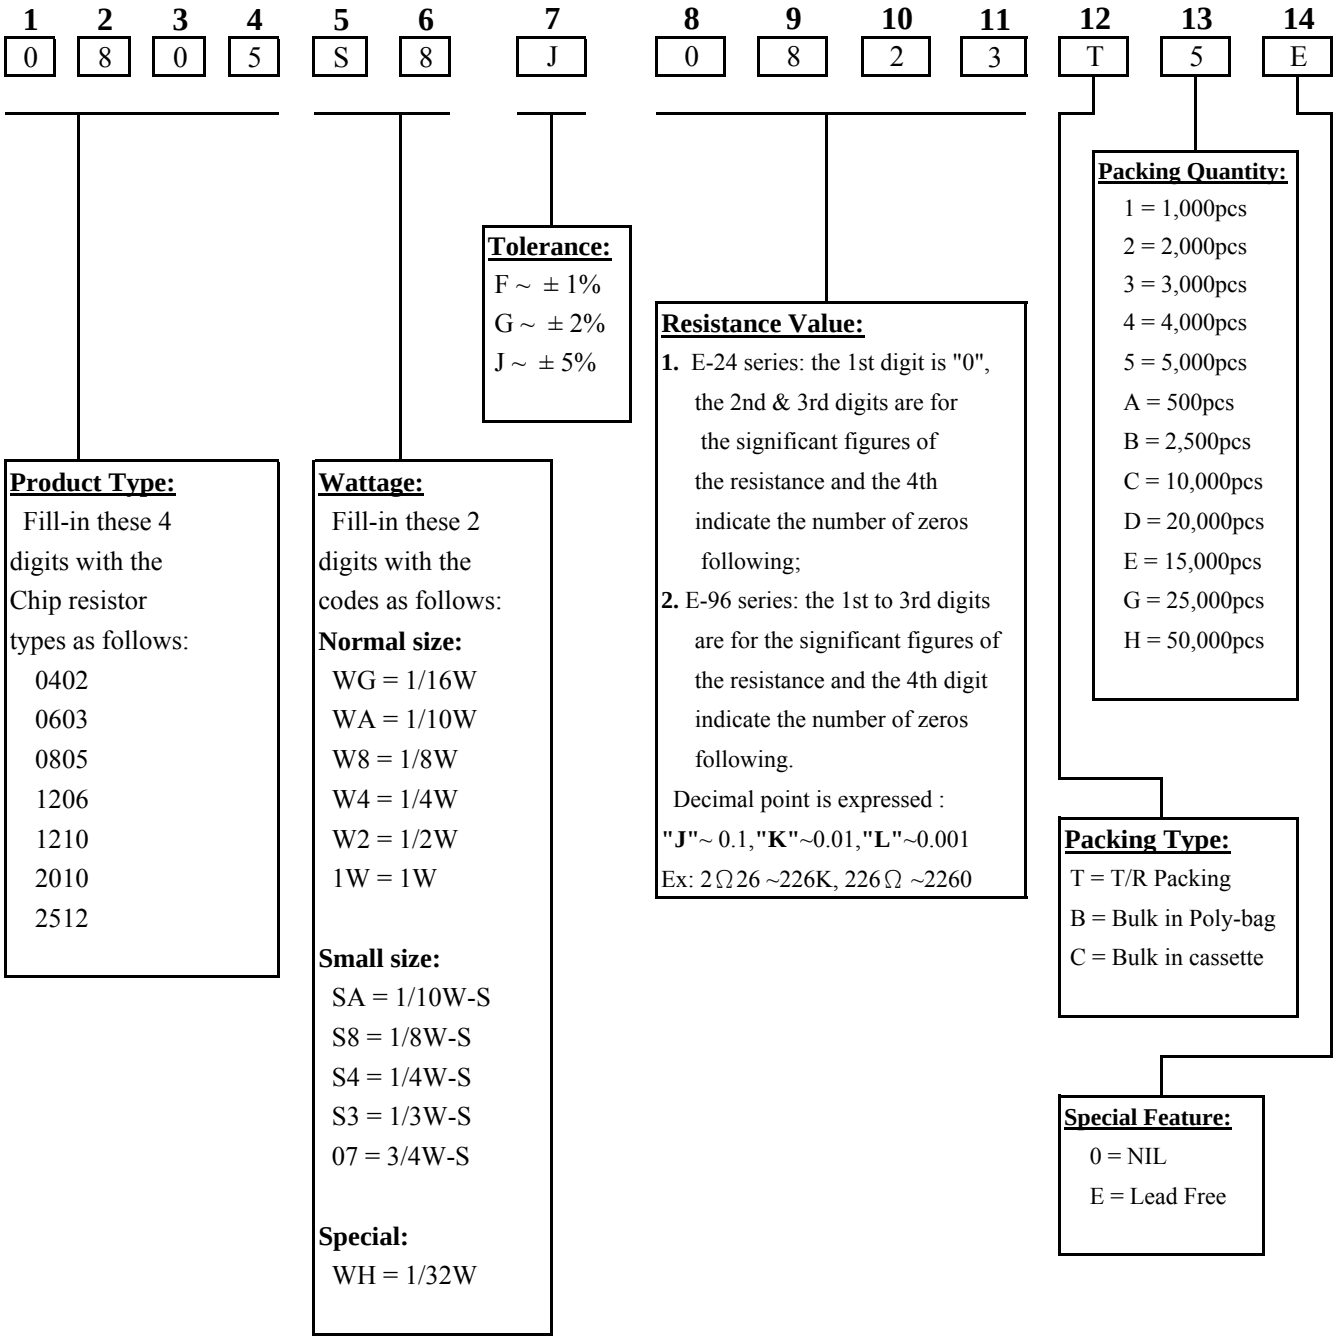

Sample : RMC 1/8W-S (0805) +/- 5% 82KΩ T/R-5,000 → 0805S8J0823T5E

RMC 1/8W-S (0805) +/- 1% 82KΩ T/R-5,000 → 0805S8F8202T5E

Thick Film Chip Resistors (Terminal Lead Free)

Environment Related Substance

This product complies to EU RoHS directive, EU PAHs directive, EU PFOS directive and Halogen free.

Ozone layer depleting substances.

Ozone depleting substances are not used in our manufacturing process of this product.
This product is not manufactured using Chloro fluorocarbons (CFCs), Hydrochlorofluorocarbons (HCFCs), Hydrobromofluorocarbons (HBFCs) or other ozone depleting substances in any phase of the manufacturing process.

Storage Condition

The performance of these products, including the solderability, is guaranteed for a year from the date of arrival at your company, provided that they remain packed as they were when delivered and stored at a temperature of 25°C ± 5°C and a relative humidity of 60%RH ± 10%RH

Even within the above guarantee periods, do not store these products in the following conditions. Otherwise, their electrical performance and/or solderability may be deteriorated, and the packaging materials (e.g. taping materials) may be deformed or deteriorated, resulting in mounting failures.

1. In salty air or in air with a high concentration of corrosive gas, such as Cl_2, H_2S, NH_3, SO_2, or NO_2
2. In direct sunlight