PW1100G Inspection Task_Caution Extraction Tool

By Cyient Offshore Team

Last Update : 26-August-26

Table of contents

Background and Objective

BACKGROUND

-

OBJECTIVE

The objective of this tool is to automate the extraction of caution statements from

- Engine Manual
- Engine Manual CIR
- SP 72-35 (EM & CIR)
- SP 72-51 (EM & CIR)

Revision History

Version	Date Updated	Remarks
V1.0	26-Aug-2026	Initial version of tool

Tool Interface

- Below picture is the user interface of **PW1100G Inspection Task_Caution Extraction Tool**.

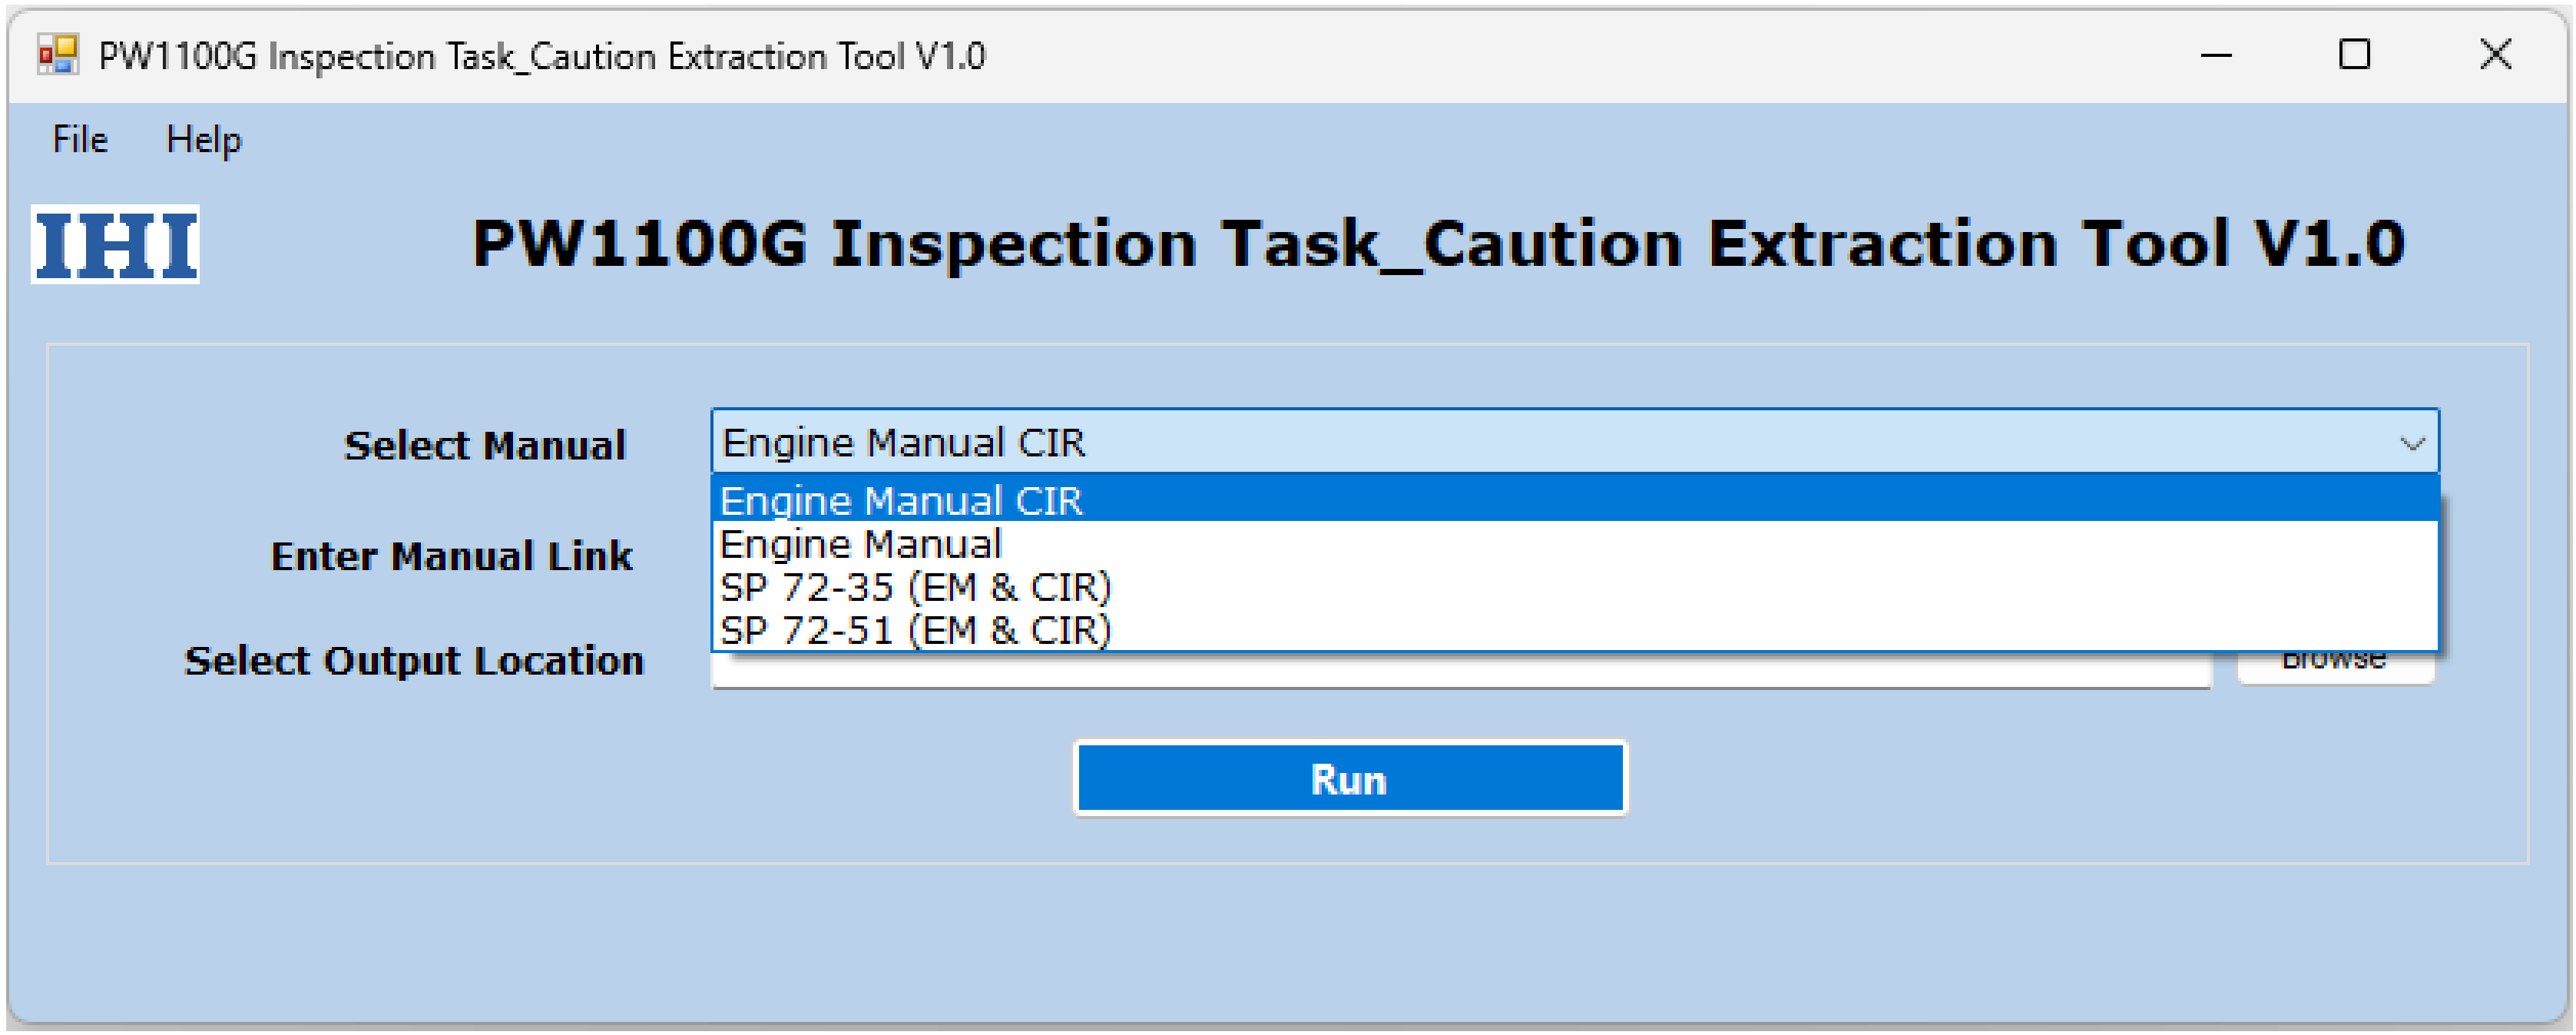

Tool User Interface

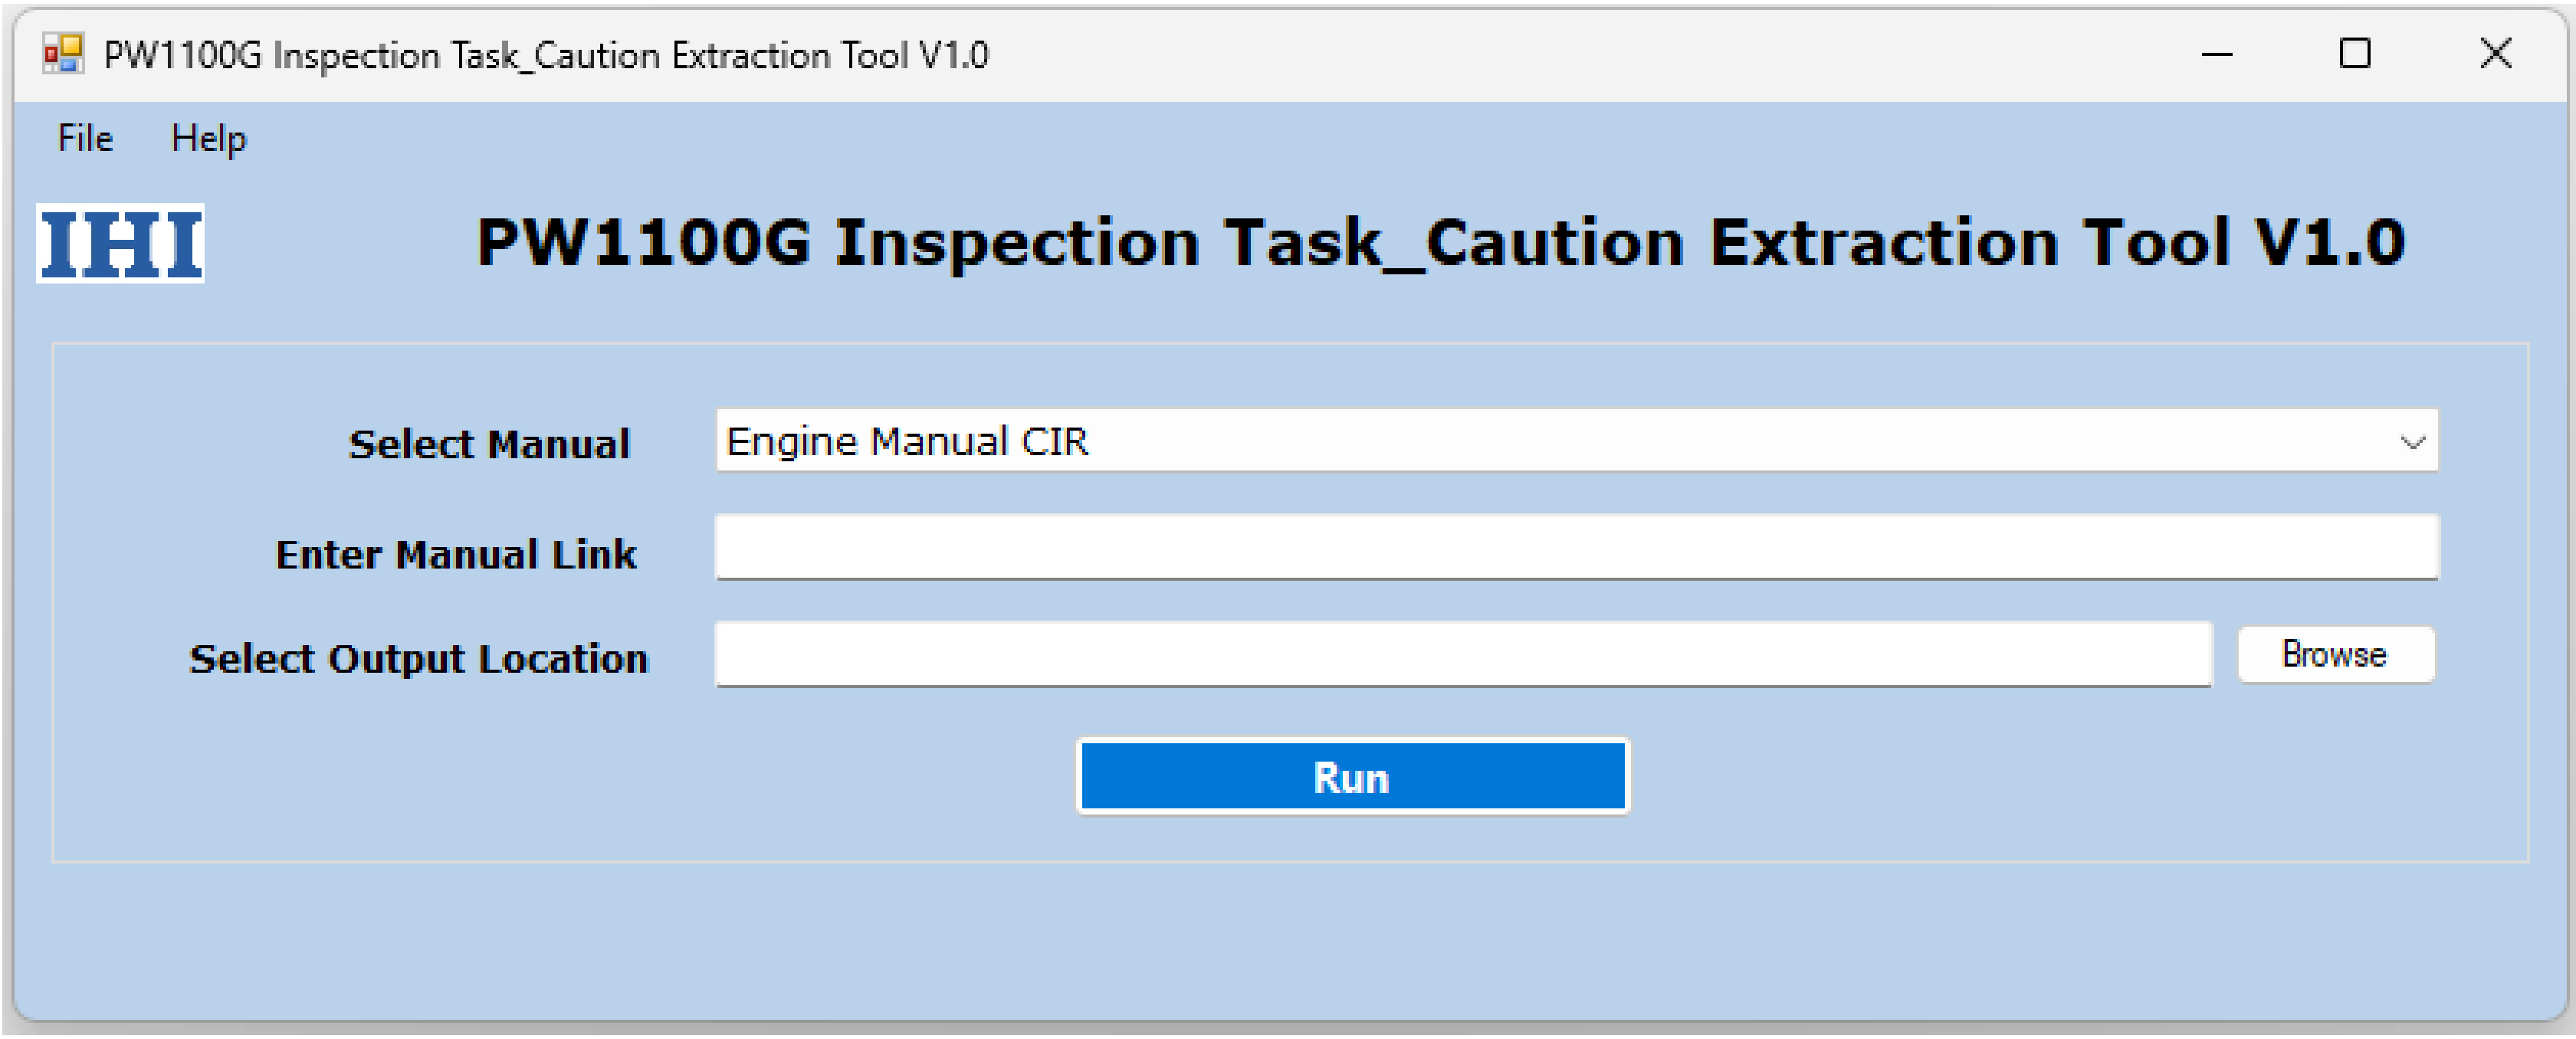

Tool User Interface

Inputs

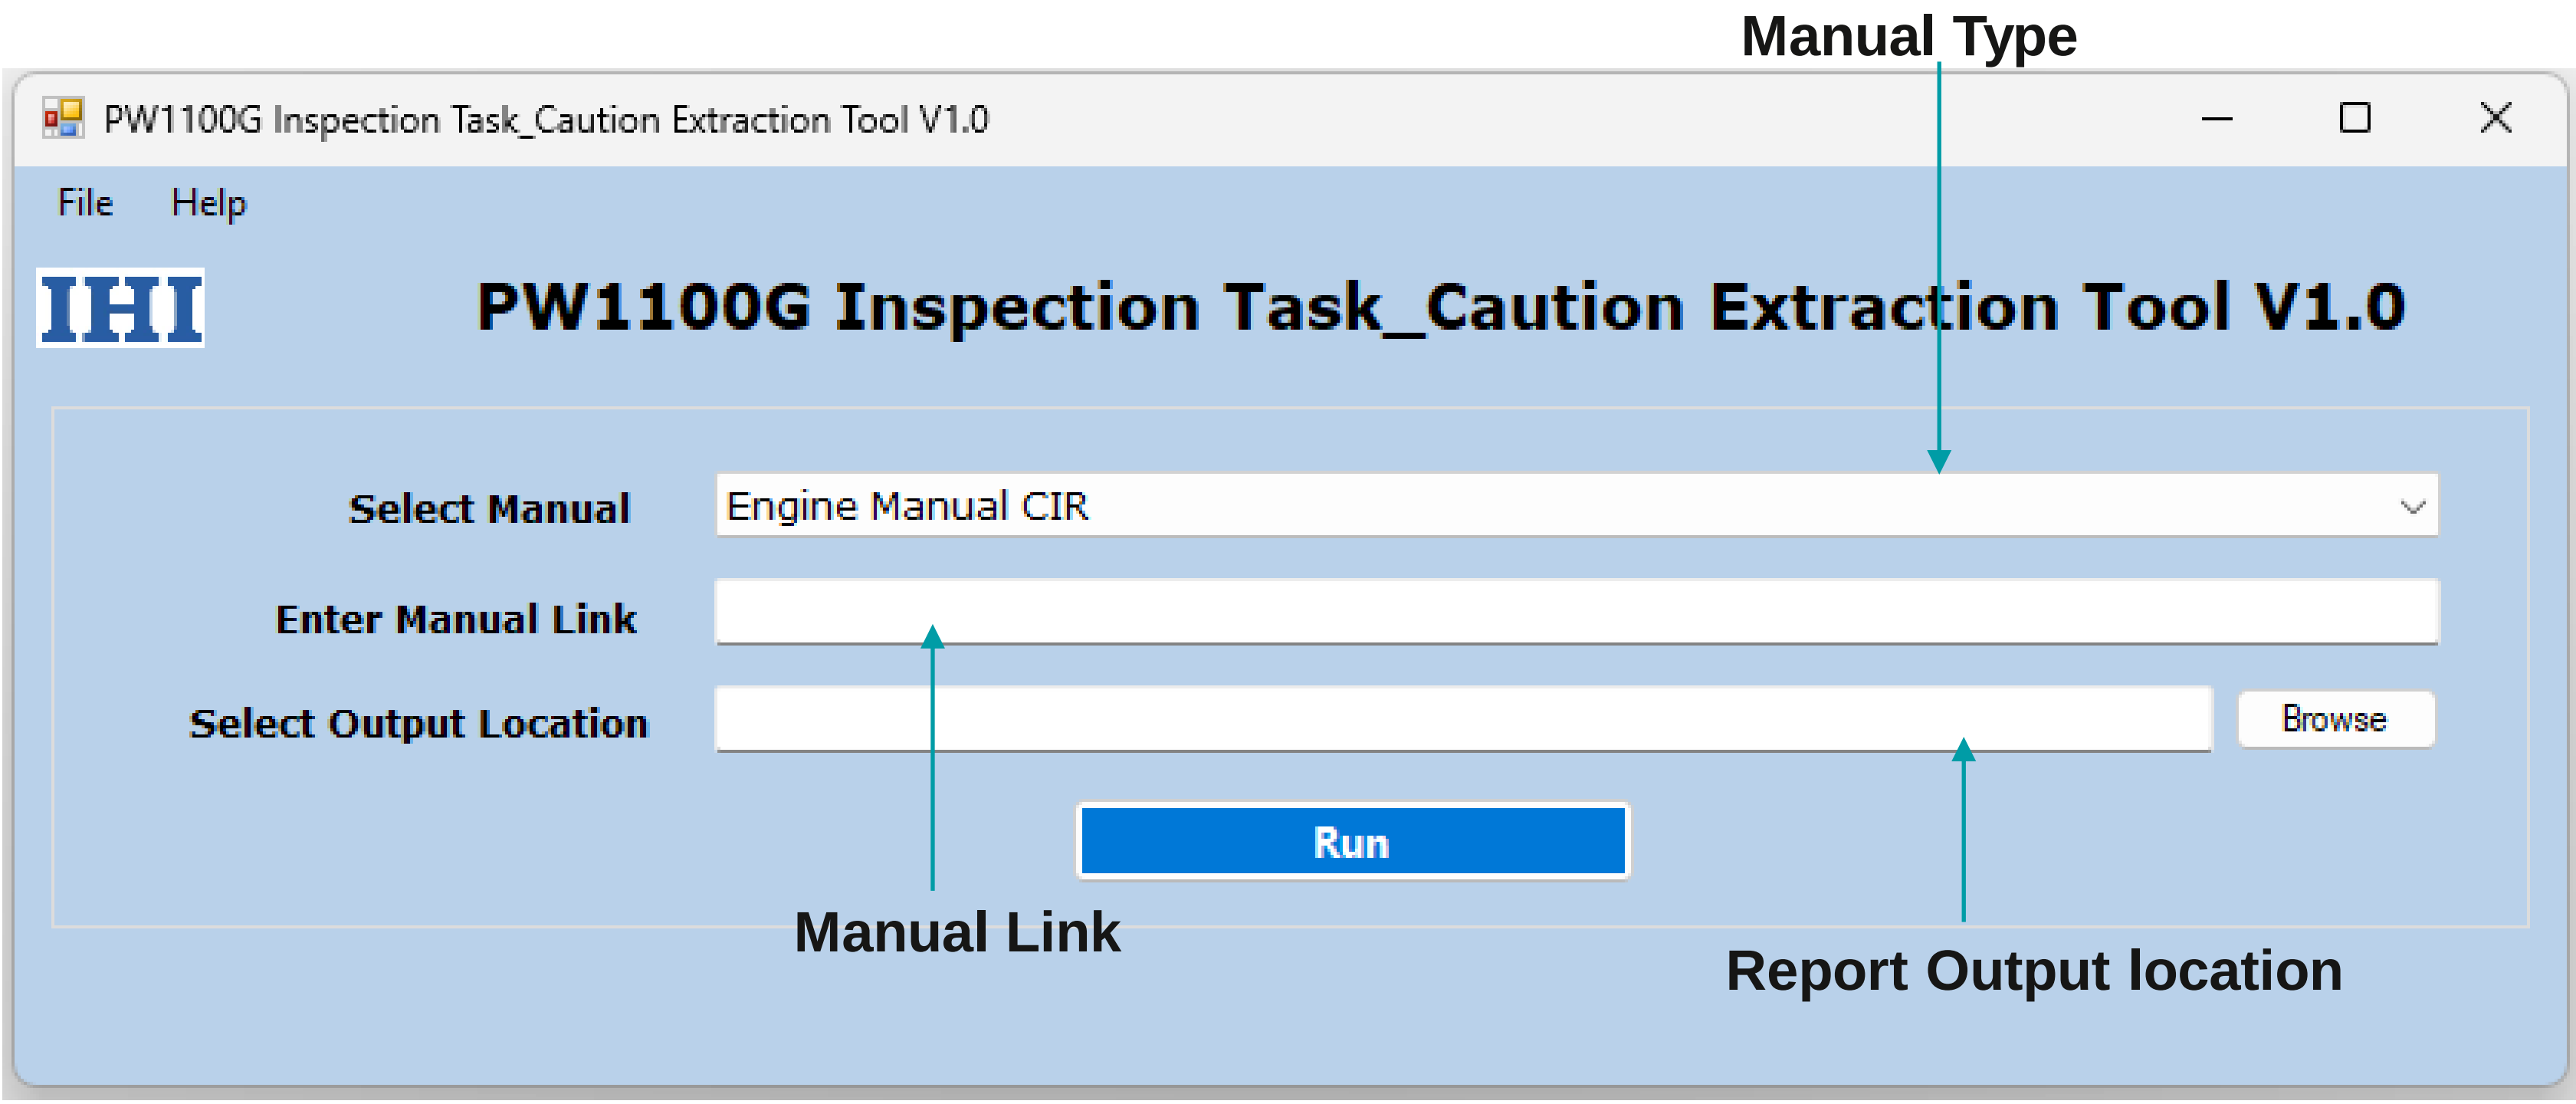

Tool User Interface

Tool functionality

1. Manual Selection

The Manual Type drop-down list allows the user to select the Manual from which cautions will be extracted.

Available options:

•Engine Manual
•Engine Manual CIR
•SP 72-31 (EM & CIR)
•SP 72-51 (EM & CIR)

Select the appropriate Manual type before entering the Manual link.

2. Manual Link

The Manual Link field is used to enter the URL of the Manual page from which cautions need to be extracted.

Example:

http://127.0.0.1:8000/PW1000G-77445-19453-00/PW1000G-77445-16992-00.html - EM
http://127.0.0.1:8000/PW1000G-77445-19453-00/PW1000G-77445-15653-00.html - EM-CIR
http://127.0.0.1:8002/PW1000G-77445-19155-00/ - SP 72-35 (EM & CIR)
http://127.0.0.1:8003/PW1000G-77445-19156-00/ - SP 72-51 (EM & CIR)

EM Link

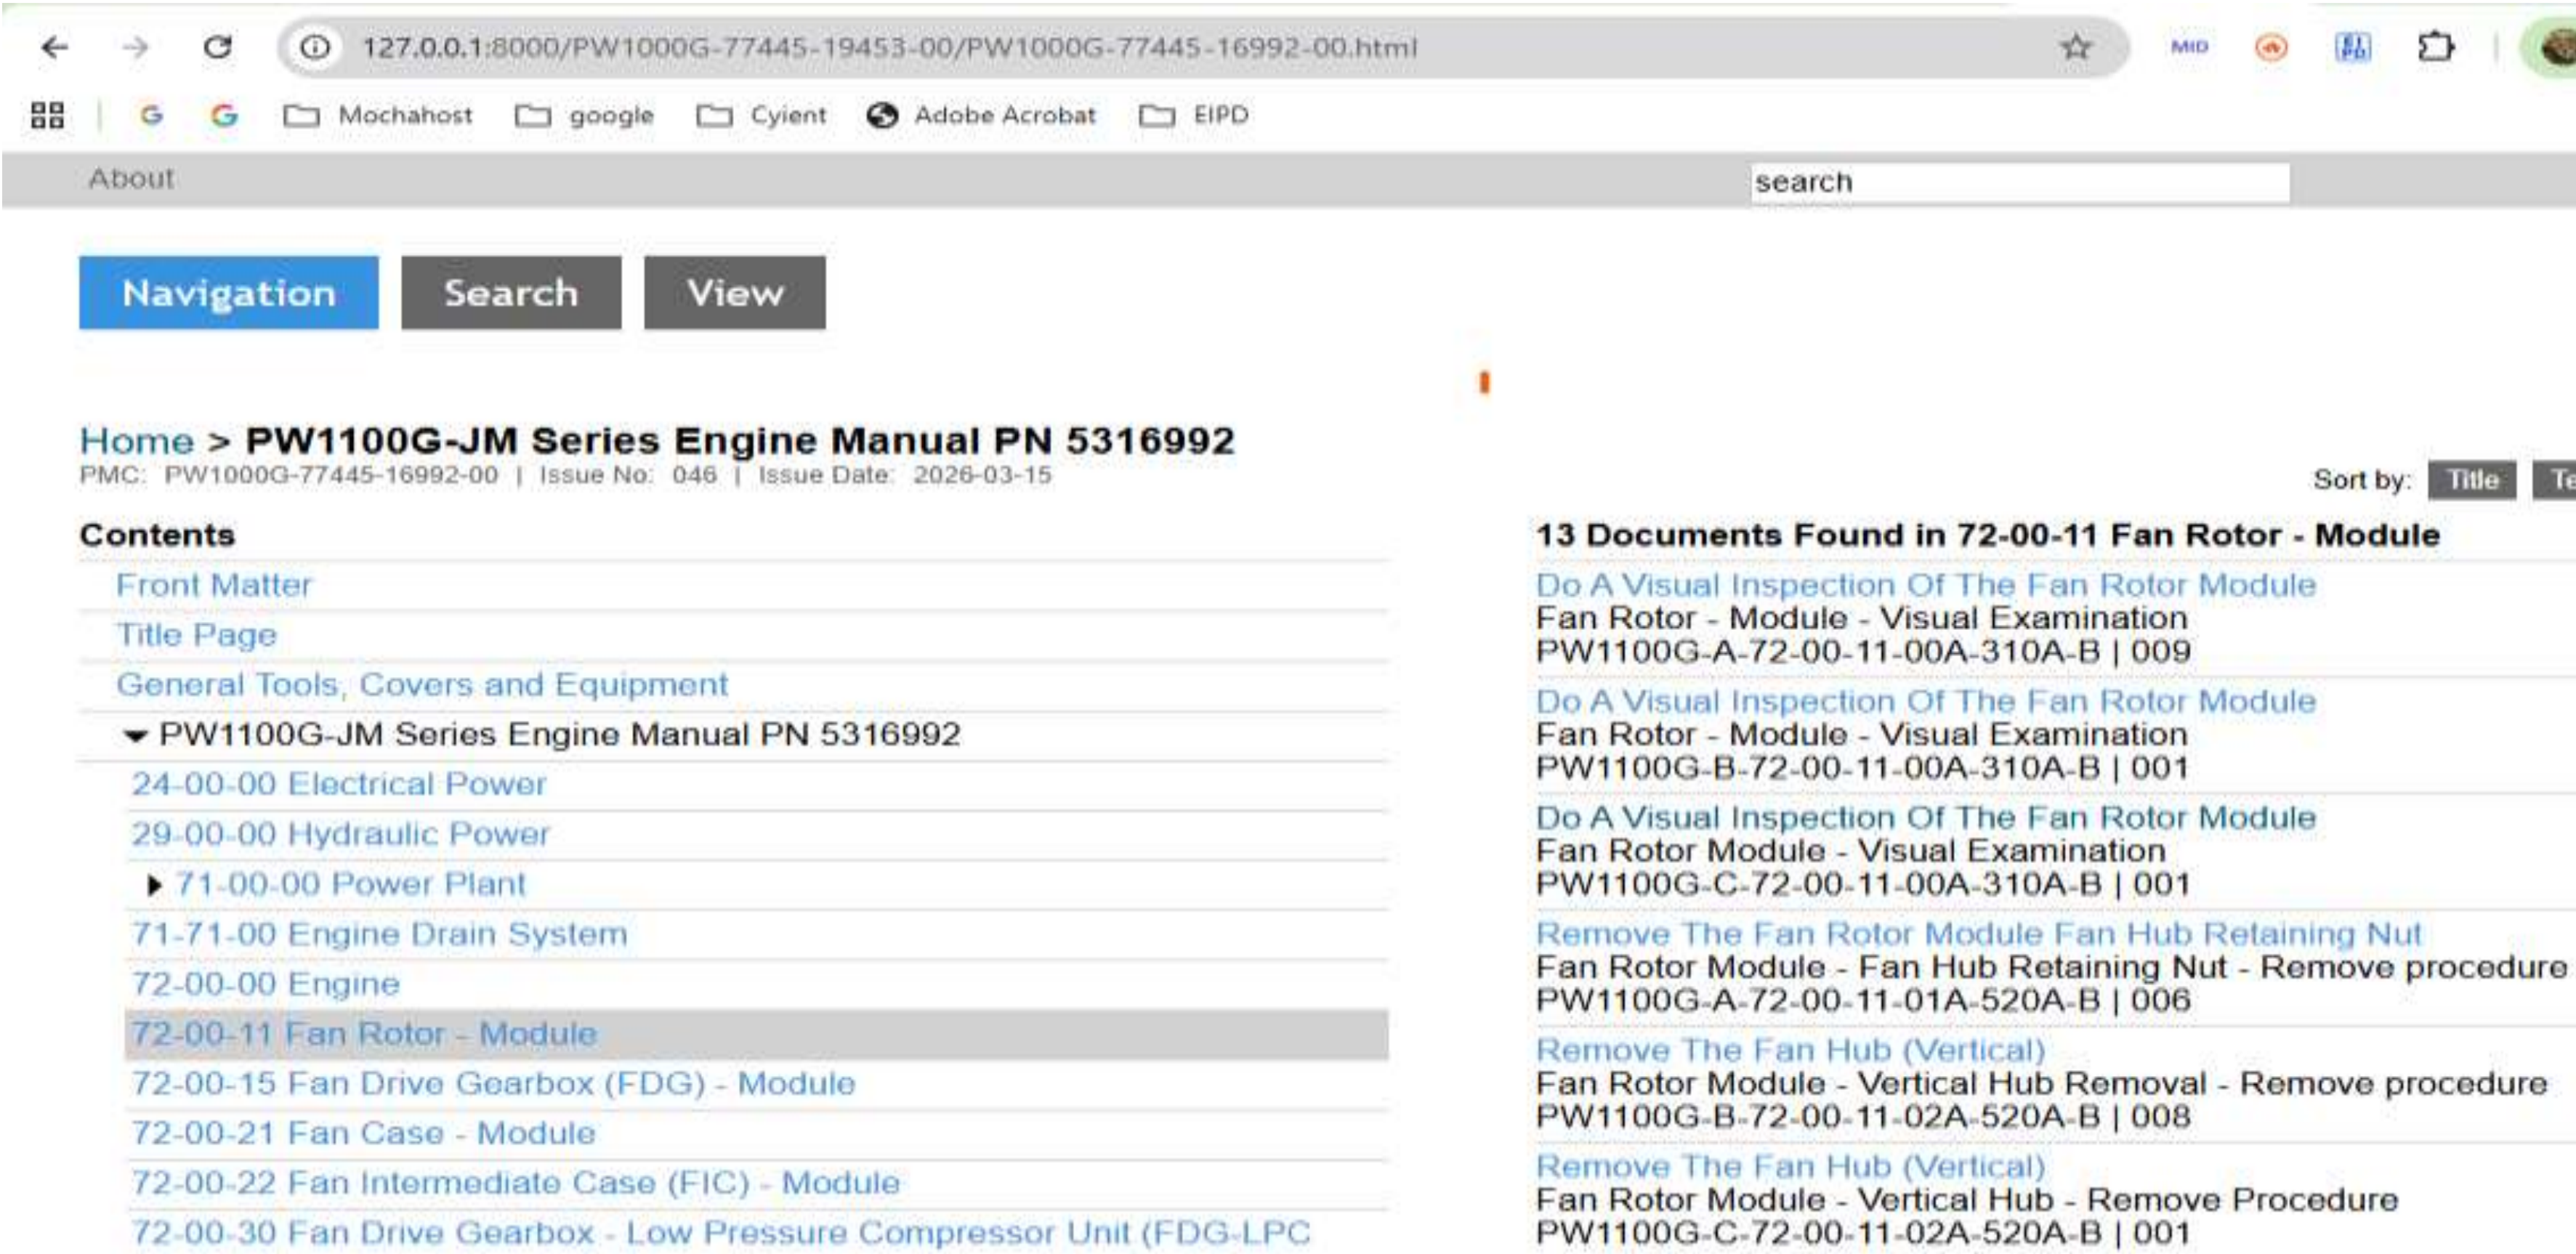

127.0.0.1:8000/PW1000G-77445-19453-00/PW1000G-77445-16992-00.html
Mochahost
google
Cyient
Adobe Acrobat
EIPD
About
search
Navigation
Search
View
Home > PW1100G-JM Series Engine Manual PN 5316992
PMC: PW1000G-77445-16992-00 | Issue No: 046 | Issue Date: 2026-03-15
Sort by: Title Tec
Contents
Front Matter
Title Page
General Tools, Covers and Equipment
PW1100G-JM Series Engine Manual PN 5316992
24-00-00 Electrical Power
29-00-00 Hydraulic Power
71-00-00 Power Plant
71-71-00 Engine Drain System
72-00-00 Engine
72-00-11 Fan Rotor - Module
72-00-15 Fan Drive Gearbox (FDG) - Module
72-00-21 Fan Case - Module
72-00-22 Fan Intermediate Case (FIC) - Module
72-00-30 Fan Drive Gearbox - Low Pressure Compressor Unit (FDG-LPC
13 Documents Found in 72-00-11 Fan Rotor - Module
Do A Visual Inspection Of The Fan Rotor Module
Fan Rotor - Module - Visual Examination
PW1100G-A-72-00-11-00A-310A-B | 009
Do A Visual Inspection Of The Fan Rotor Module
Fan Rotor - Module - Visual Examination
PW1100G-B-72-00-11-00A-310A-B | 001
Do A Visual Inspection Of The Fan Rotor Module
Fan Rotor Module - Visual Examination
PW1100G-C-72-00-11-00A-310A-B | 001
Remove The Fan Rotor Module Fan Hub Retaining Nut
Fan Rotor Module - Fan Hub Retaining Nut - Remove procedure
PW1100G-A-72-00-11-01A-520A-B | 006
Remove The Fan Hub (Vertical)
Fan Rotor Module - Vertical Hub Removal - Remove procedure
PW1100G-B-72-00-11-02A-520A-B | 008
Remove The Fan Hub (Vertical)
Fan Rotor Module - Vertical Hub - Remove Procedure
PW1100G-C-72-00-11-02A-520A-B | 001

EM CIR Link

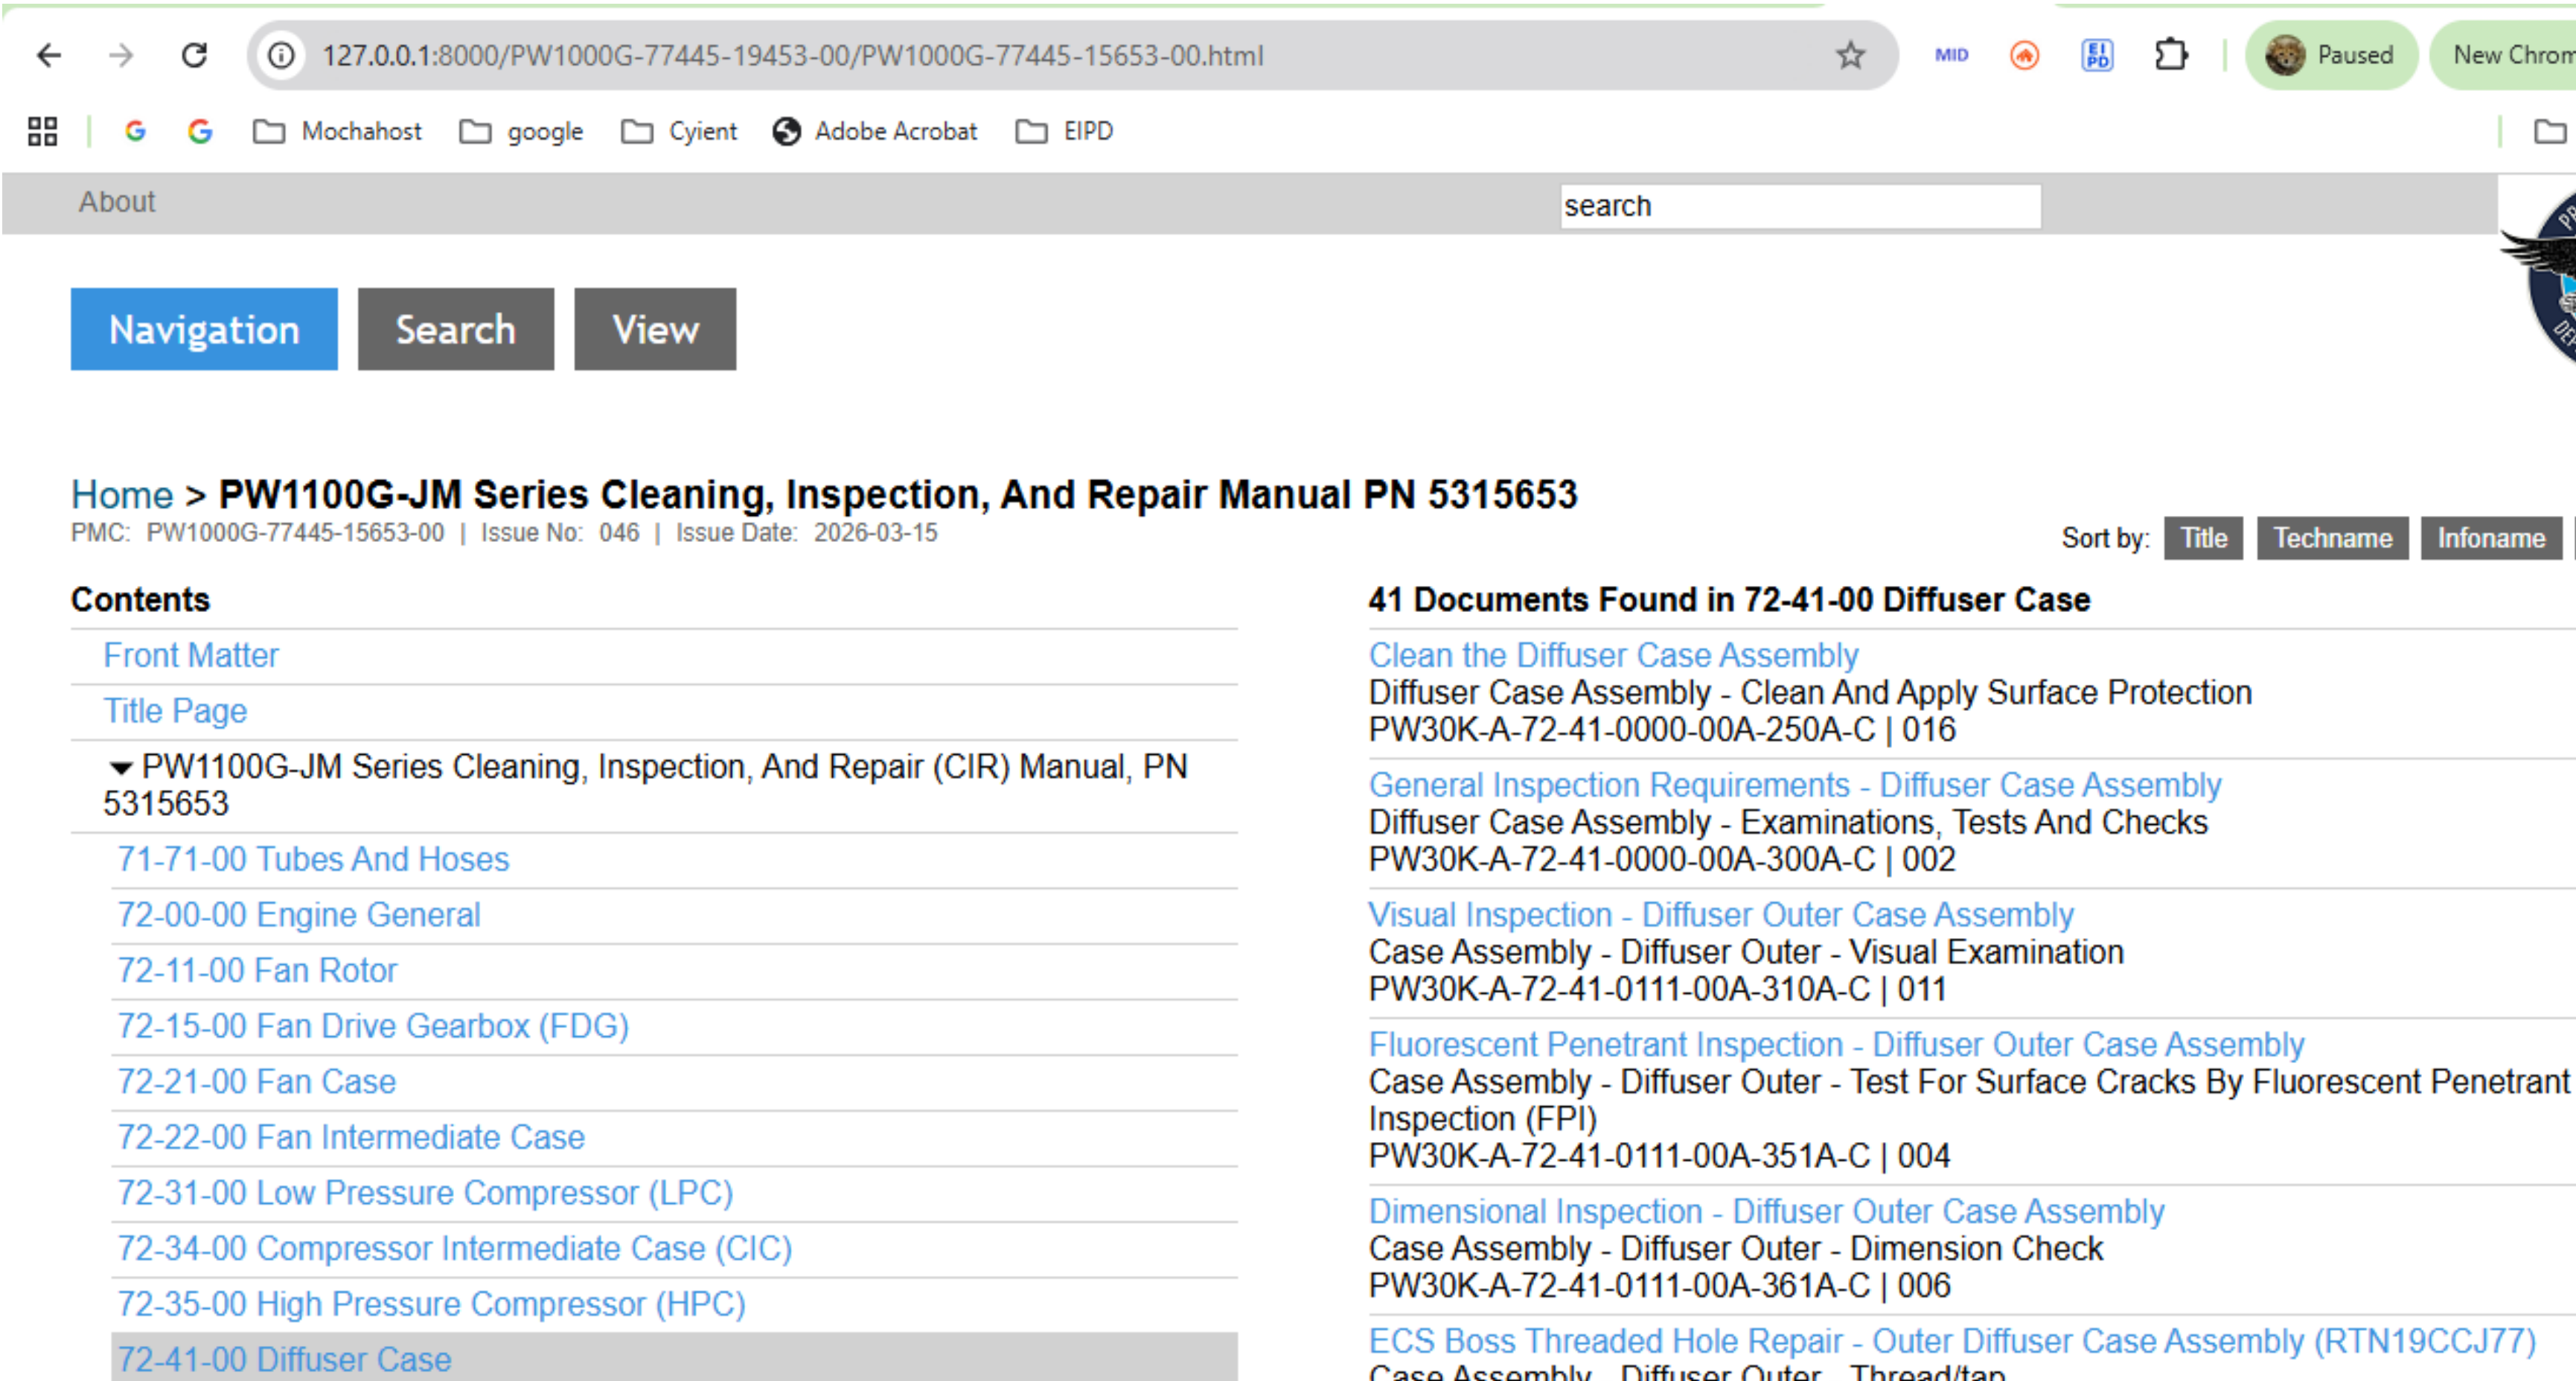

127.0.0.1:8000/PW1000G-77445-19453-00/PW1000G-77445-15653-00.html

Mochahost | google | Cyient | Adobe Acrobat | EIPD

About

search

Navigation | Search | View

Home > **PW1100G-JM Series Cleaning, Inspection, And Repair Manual PN 5315653**

PMC: PW1000G-77445-15653-00 | Issue No: 046 | Issue Date: 2026-03-15

Sort by: Title | Techname | Infoname

Contents

41 Documents Found in 72-41-00 Diffuser Case

Clean the Diffuser Case Assembly
Diffuser Case Assembly - Clean And Apply Surface Protection
PW30K-A-72-41-0000-00A-250A-C | 016

General Inspection Requirements - Diffuser Case Assembly
Diffuser Case Assembly - Examinations, Tests And Checks
PW30K-A-72-41-0000-00A-300A-C | 002

Visual Inspection - Diffuser Outer Case Assembly
Case Assembly - Diffuser Outer - Visual Examination
PW30K-A-72-41-0111-00A-310A-C | 011

Fluorescent Penetrant Inspection - Diffuser Outer Case Assembly
Case Assembly - Diffuser Outer - Test For Surface Cracks By Fluorescent Penetrant Inspection (FPI)
PW30K-A-72-41-0111-00A-351A-C | 004

Dimensional Inspection - Diffuser Outer Case Assembly
Case Assembly - Diffuser Outer - Dimension Check
PW30K-A-72-41-0111-00A-361A-C | 006

ECS Boss Threaded Hole Repair - Outer Diffuser Case Assembly (RTN19CCJ77)
Case Assembly - Diffuser Outer - Thread/tap

SP 72-35 (EM & CIR) Link

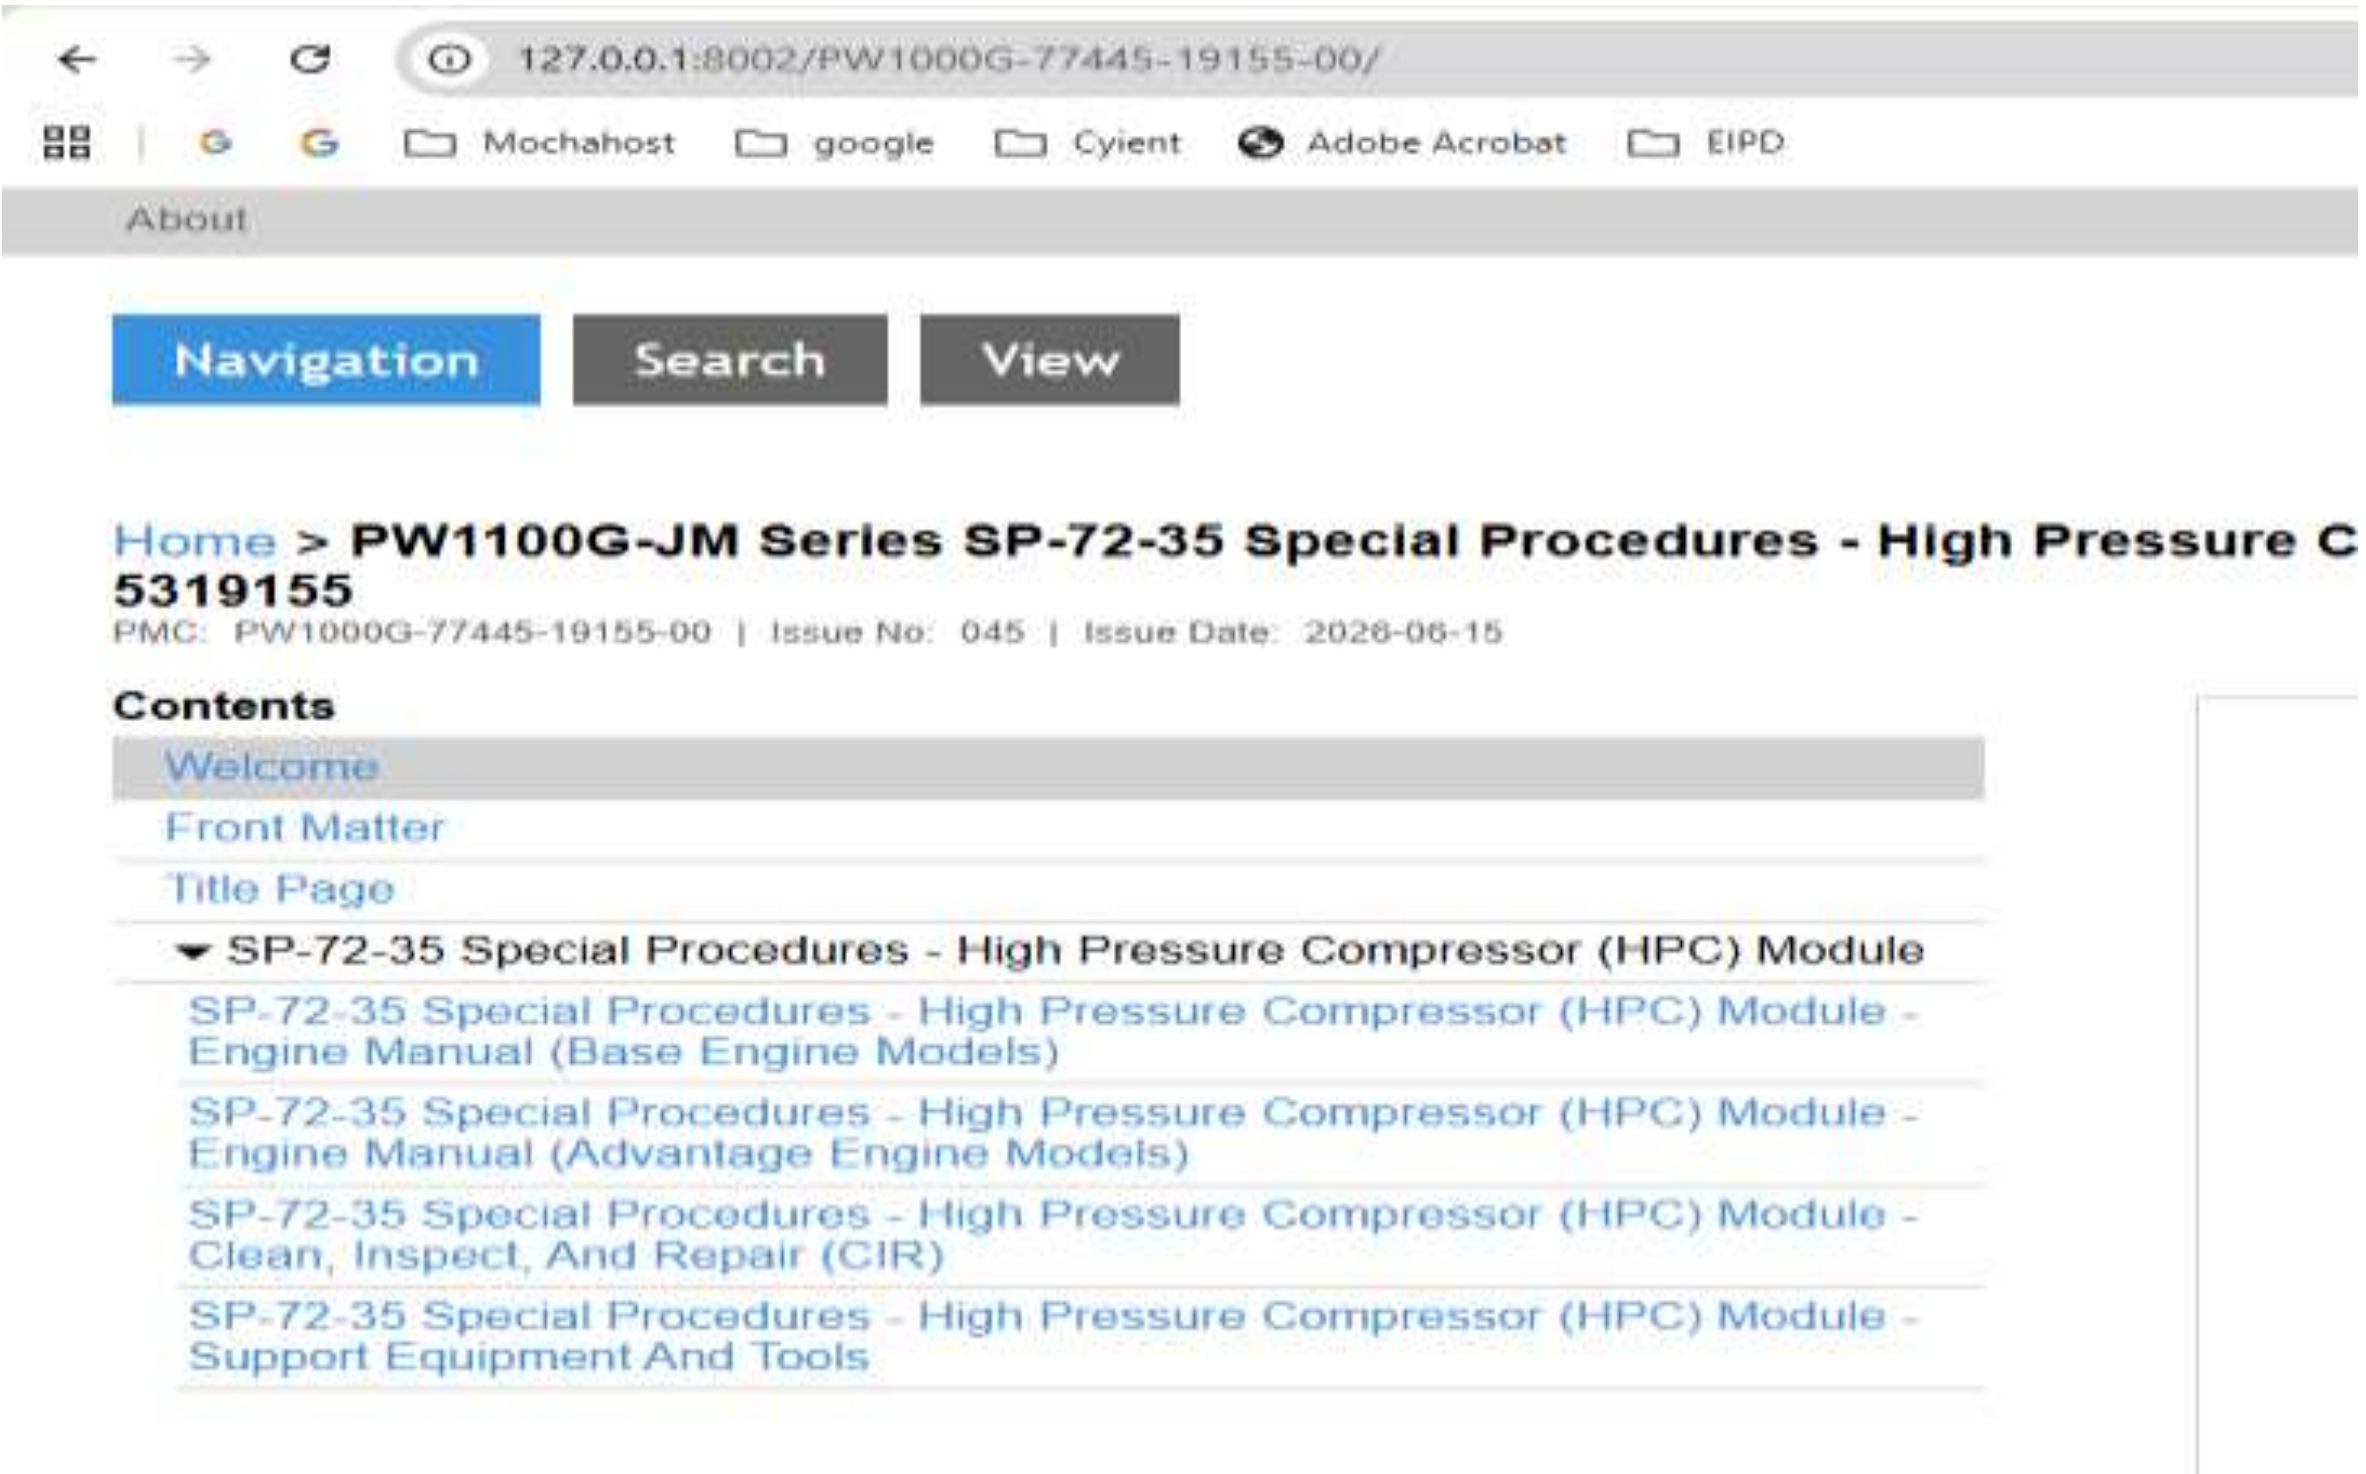

SP 72-51 (EM & CIR) Link

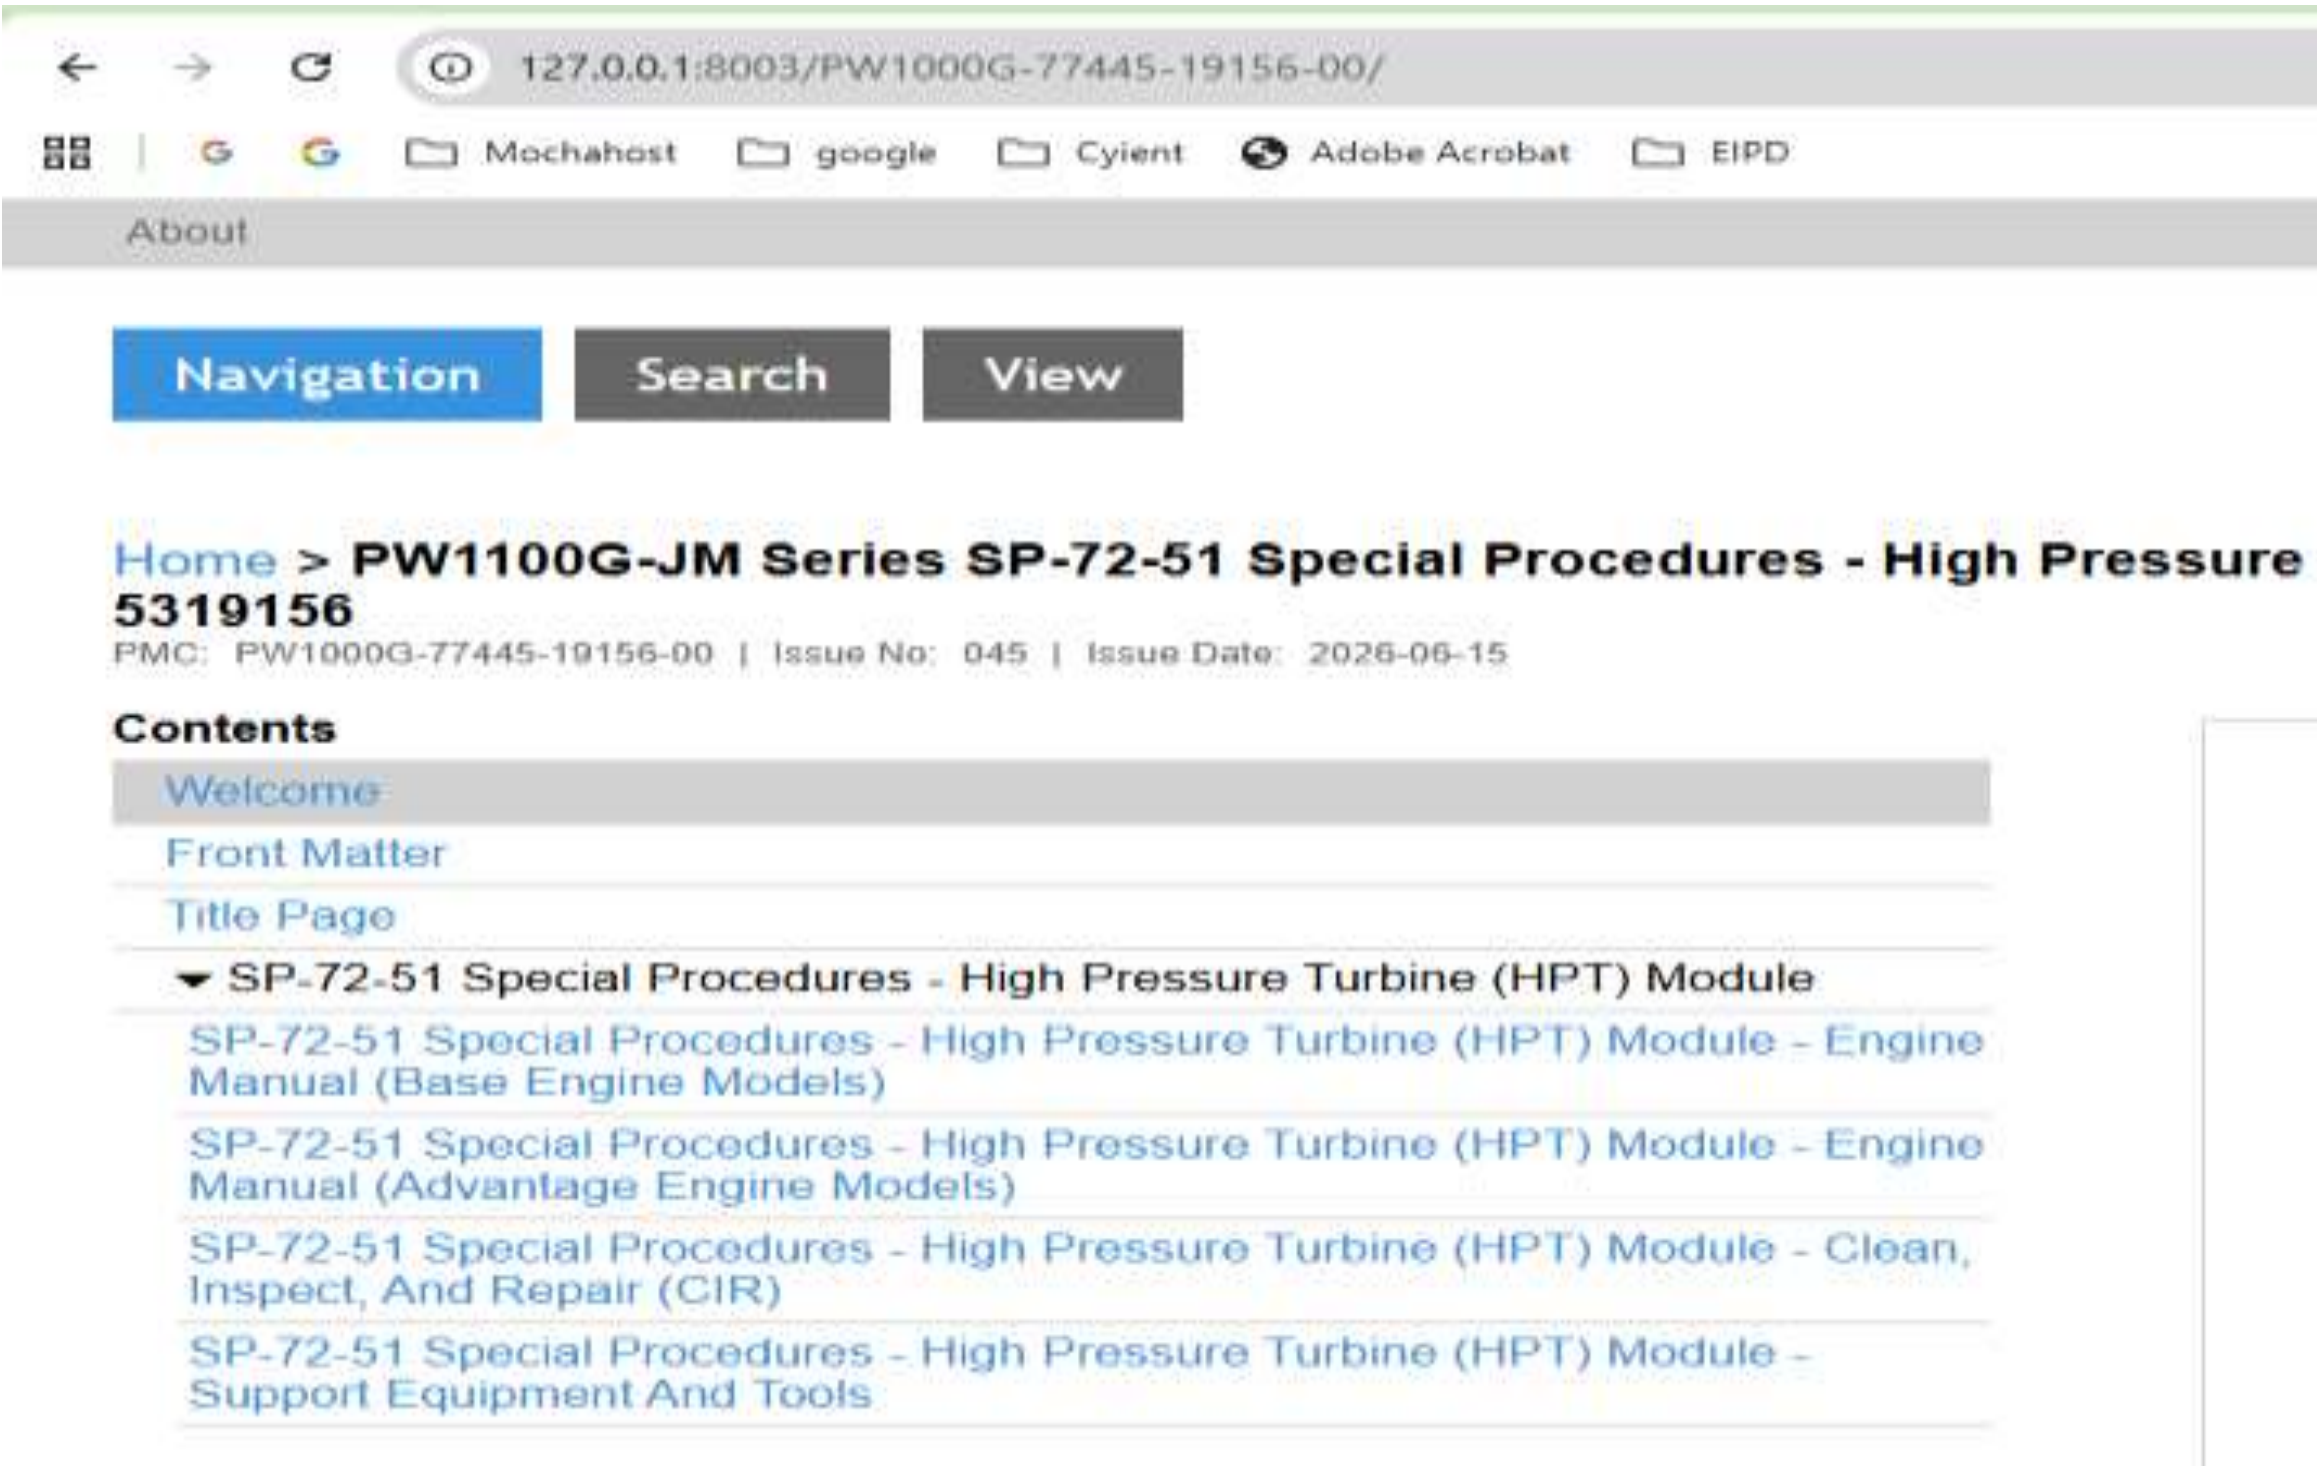

Ensure that the Engine Manual link corresponds to the Manual type selected in the drop-down list.

NOTE : The port numbers may change

3. Output Location

The Output location specifies the path where the extracted Cautions report will be generated.
Users may enter the full file path or browse to the desired location.

Example:
D:\Reports\CautionList.xlsx

4. Run Button

Click Run Button to begin the extraction process.

The tool will:

1. Open the specified Manual Link in the background.
2. Scan the Link for task pages.
3. Extract cautions from these task pages.

- If the selected manual link is EM, the output report will contain 2 worksheets:
  - Sheet 1: All EM cautions.
  - Sheet 2: EM Cautions having Information Code "-3xx".

- If the selected manual link is EM_CIR, the output report will contain 2 worksheets:
  - Sheet 1: All EM_CIR cautions.
  - Sheet 2: EM_CIR Cautions having Information Code "-3xx".

- If the selected manual link is SP 72-35, the output report will contain 3 worksheets:
  - Sheet 1: All EM cautions.
  - Sheet 2: All CIR cautions.
  - Sheet 3: EM & CIR Cautions having Information Code "-3xx".

- If the selected manual link is SP 72-51, the output report will contain 3 worksheets:
  - Sheet 1: All EM cautions.
  - Sheet 2: All CIR cautions.
  - Sheet 3: EM & CIR Cautions having Information Code "-3xx".

4. Generate the report at the specified location.

Output

CautionsList

Cautions Report

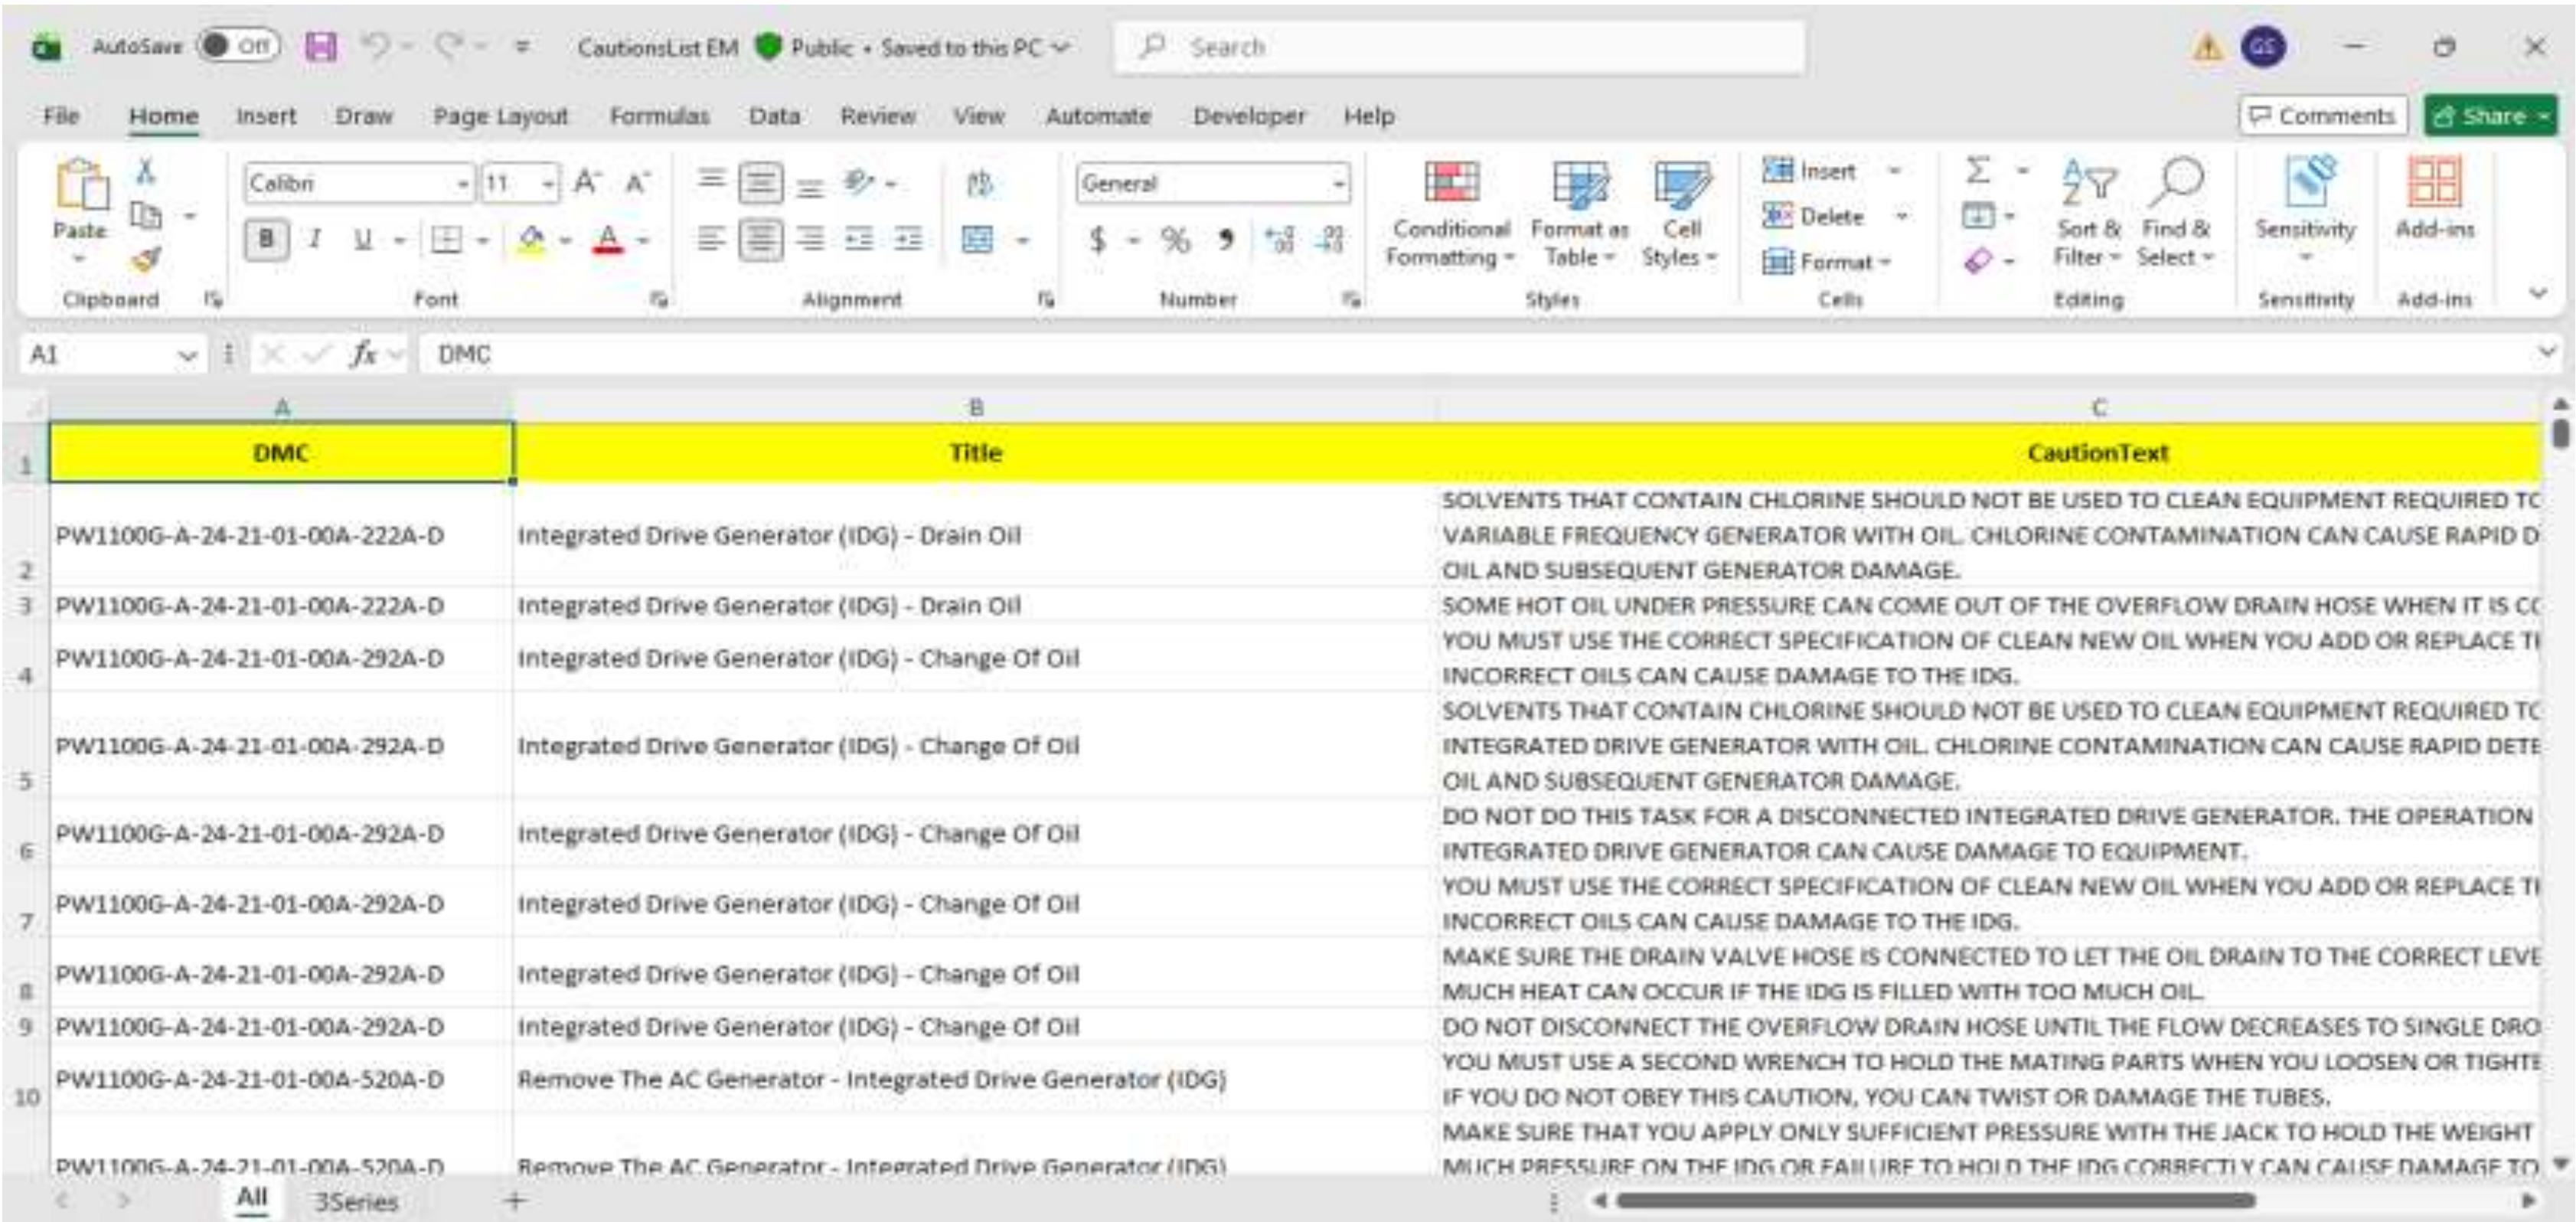

DMC	Title	CautionText
PW1100G-A-24-21-01-00A-222A-D	Integrated Drive Generator (IDG) - Drain Oil	SOLVENTS THAT CONTAIN CHLORINE SHOULD NOT BE USED TO CLEAN EQUIPMENT REQUIRED TC VARIABLE FREQUENCY GENERATOR WITH OIL. CHLORINE CONTAMINATION CAN CAUSE RAPID D OIL AND SUBSEQUENT GENERATOR DAMAGE.
PW1100G-A-24-21-01-00A-222A-D	Integrated Drive Generator (IDG) - Drain Oil	SOME HOT OIL UNDER PRESSURE CAN COME OUT OF THE OVERFLOW DRAIN HOSE WHEN IT IS CC
PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	YOU MUST USE THE CORRECT SPECIFICATION OF CLEAN NEW OIL WHEN YOU ADD OR REPLACE TI INCORRECT OILS CAN CAUSE DAMAGE TO THE IDG.
PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	SOLVENTS THAT CONTAIN CHLORINE SHOULD NOT BE USED TO CLEAN EQUIPMENT REQUIRED TC INTEGRATED DRIVE GENERATOR WITH OIL. CHLORINE CONTAMINATION CAN CAUSE RAPID DETE OIL AND SUBSEQUENT GENERATOR DAMAGE.
PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	DO NOT DO THIS TASK FOR A DISCONNECTED INTEGRATED DRIVE GENERATOR. THE OPERATION INTEGRATED DRIVE GENERATOR CAN CAUSE DAMAGE TO EQUIPMENT.
PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	YOU MUST USE THE CORRECT SPECIFICATION OF CLEAN NEW OIL WHEN YOU ADD OR REPLACE TI INCORRECT OILS CAN CAUSE DAMAGE TO THE IDG.
PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	MAKE SURE THE DRAIN VALVE HOSE IS CONNECTED TO LET THE OIL DRAIN TO THE CORRECT LEVE MUCH HEAT CAN OCCUR IF THE IDG IS FILLED WITH TOO MUCH OIL.
PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	DO NOT DISCONNECT THE OVERFLOW DRAIN HOSE UNTIL THE FLOW DECREASES TO SINGLE DRO
PW1100G-A-24-21-01-00A-520A-D	Remove The AC Generator - Integrated Drive Generator (IDG)	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTE IF YOU DO NOT OBEY THIS CAUTION, YOU CAN TWIST OR DAMAGE THE TUBES.
PW1100G-A-24-21-01-00A-520A-D	Remove The AC Generator - Integrated Drive Generator (IDG)	MAKE SURE THAT YOU APPLY ONLY SUFFICIENT PRESSURE WITH THE JACK TO HOLD THE WEIGHT MUCH PRESSURE ON THE IDG OR FAILURE TO HOLD THE IDG CORRECTLY CAN CAUSE DAMAGE TO

EM Cautions Report

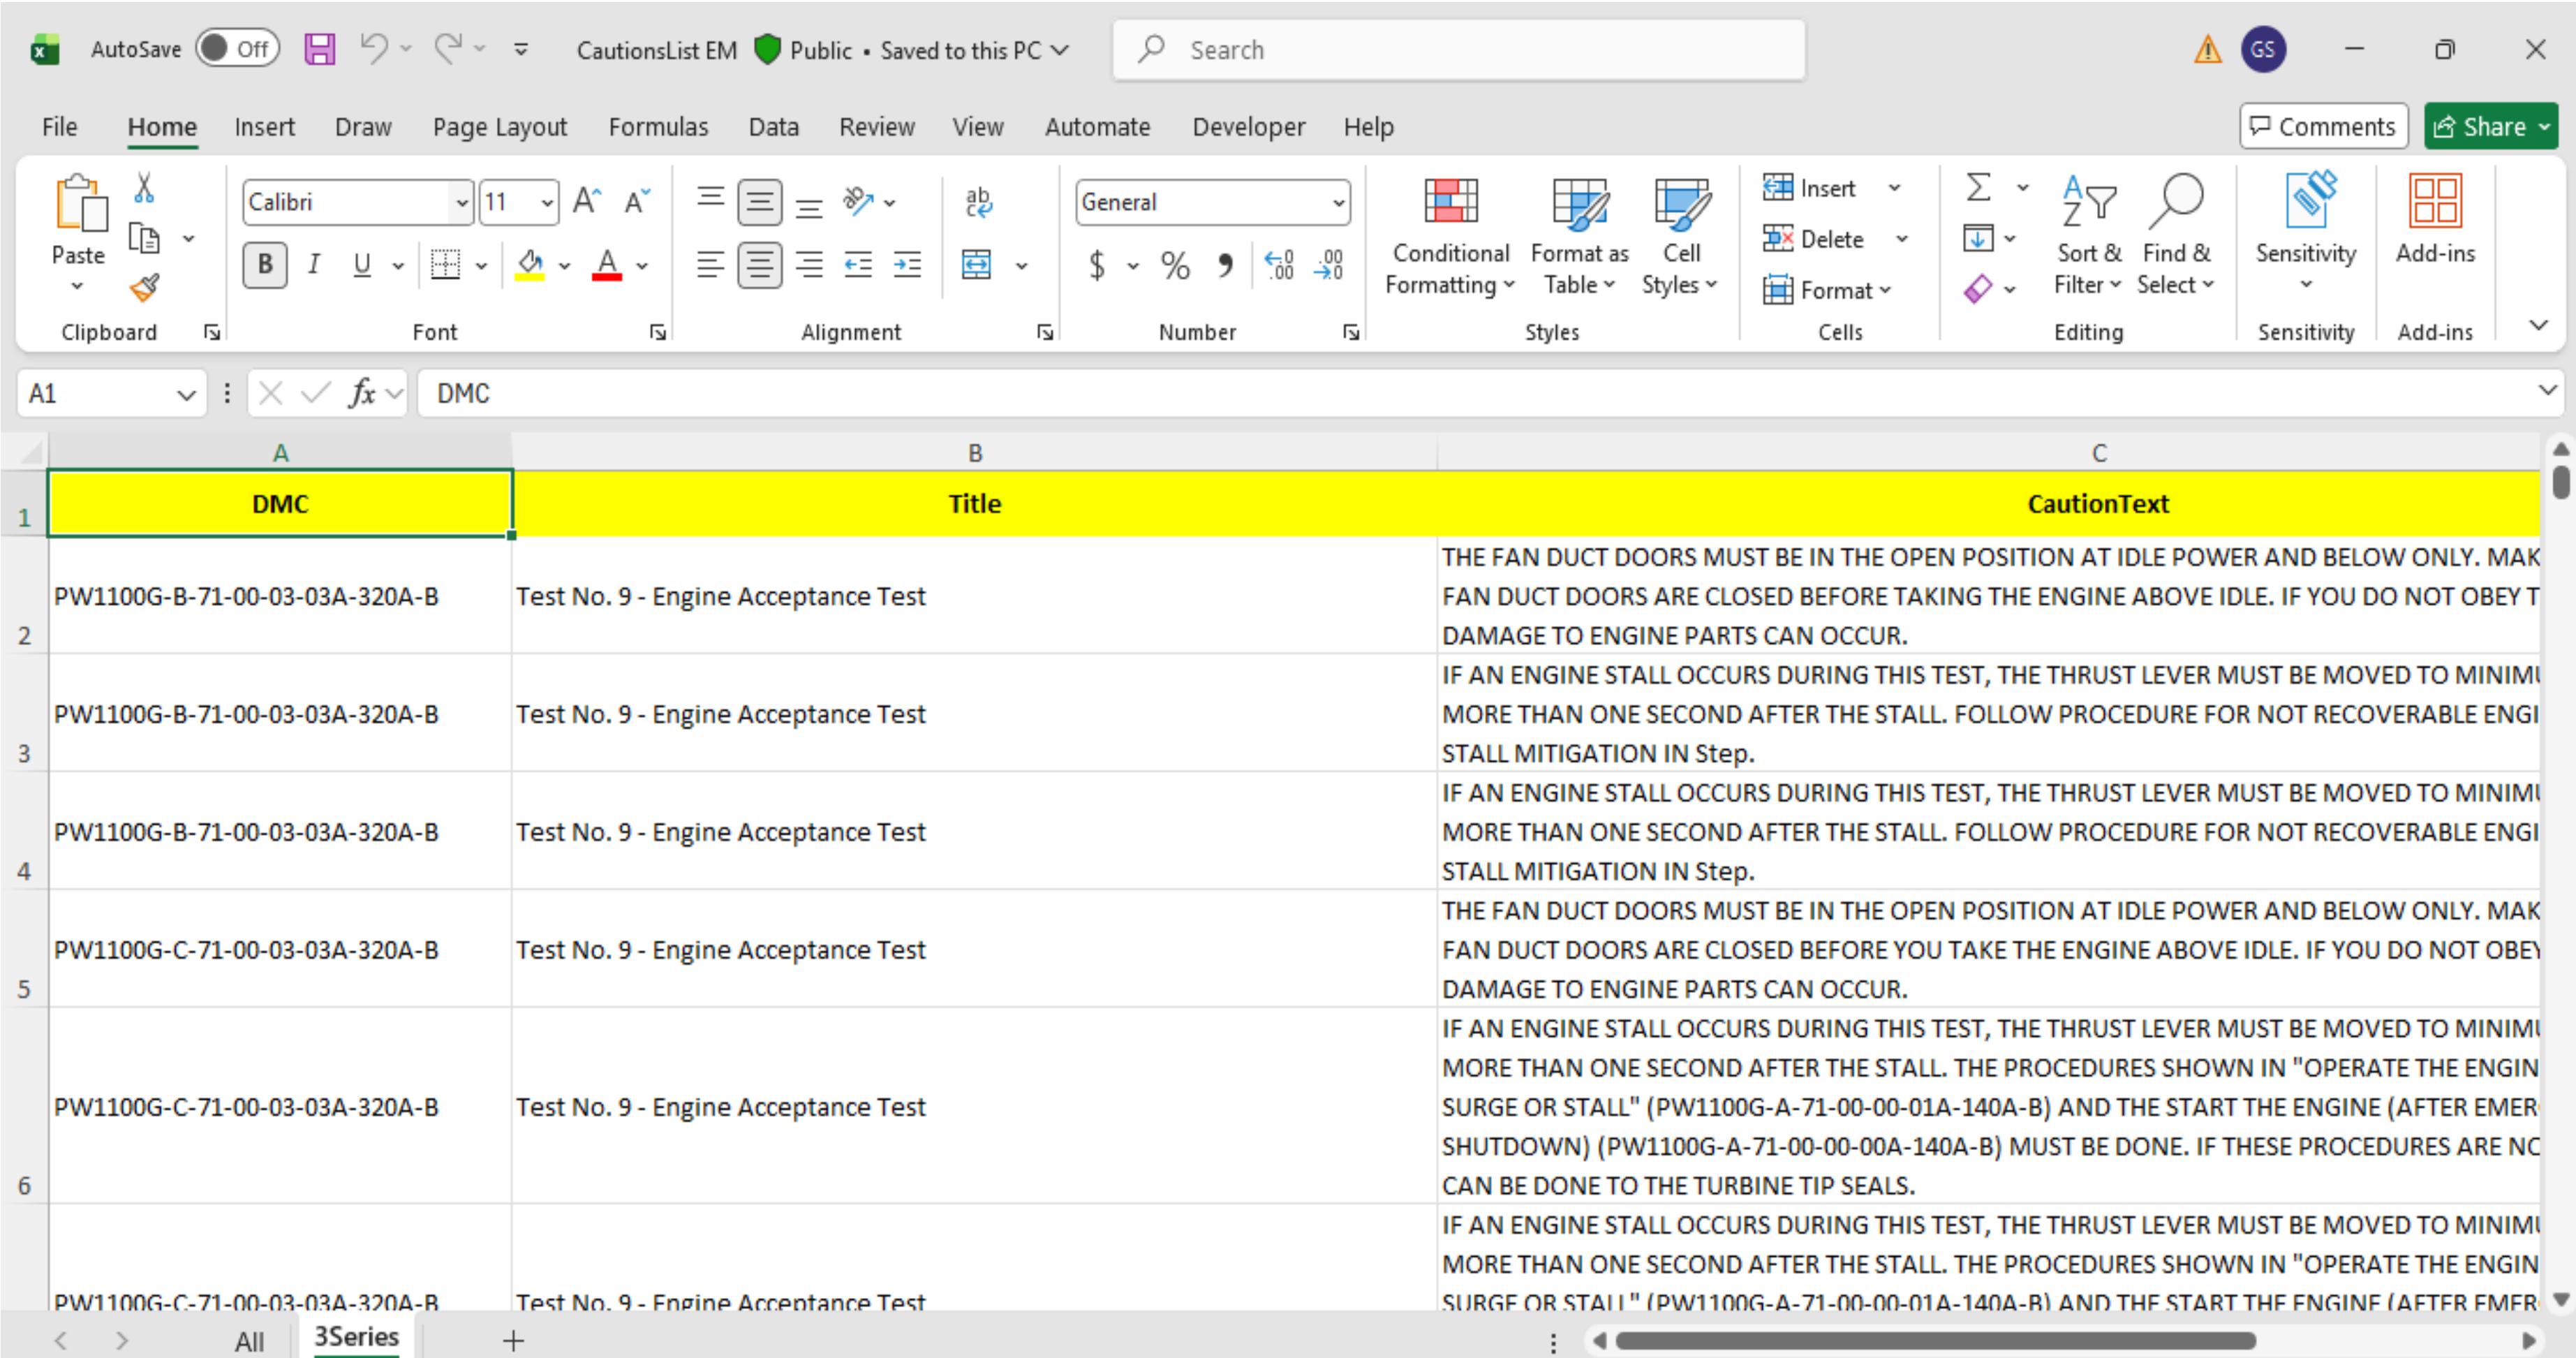

DMC	Title	CautionText
PW1100G-B-71-00-03-03A-320A-B	Test No. 9 - Engine Acceptance Test	THE FAN DUCT DOORS MUST BE IN THE OPEN POSITION AT IDLE POWER AND BELOW ONLY. MAK FAN DUCT DOORS ARE CLOSED BEFORE TAKING THE ENGINE ABOVE IDLE. IF YOU DO NOT OBEY T DAMAGE TO ENGINE PARTS CAN OCCUR.
PW1100G-B-71-00-03-03A-320A-B	Test No. 9 - Engine Acceptance Test	IF AN ENGINE STALL OCCURS DURING THIS TEST, THE THRUST LEVER MUST BE MOVED TO MINIMU MORE THAN ONE SECOND AFTER THE STALL. FOLLOW PROCEDURE FOR NOT RECOVERABLE ENGI STALL MITIGATION IN Step.
PW1100G-B-71-00-03-03A-320A-B	Test No. 9 - Engine Acceptance Test	IF AN ENGINE STALL OCCURS DURING THIS TEST, THE THRUST LEVER MUST BE MOVED TO MINIMU MORE THAN ONE SECOND AFTER THE STALL. FOLLOW PROCEDURE FOR NOT RECOVERABLE ENGI STALL MITIGATION IN Step.
PW1100G-C-71-00-03-03A-320A-B	Test No. 9 - Engine Acceptance Test	THE FAN DUCT DOORS MUST BE IN THE OPEN POSITION AT IDLE POWER AND BELOW ONLY. MAK FAN DUCT DOORS ARE CLOSED BEFORE YOU TAKE THE ENGINE ABOVE IDLE. IF YOU DO NOT OBEY DAMAGE TO ENGINE PARTS CAN OCCUR.
PW1100G-C-71-00-03-03A-320A-B	Test No. 9 - Engine Acceptance Test	IF AN ENGINE STALL OCCURS DURING THIS TEST, THE THRUST LEVER MUST BE MOVED TO MINIMU MORE THAN ONE SECOND AFTER THE STALL. THE PROCEDURES SHOWN IN "OPERATE THE ENGIN SURGE OR STALL" (PW1100G-A-71-00-00-01A-140A-B) AND THE START THE ENGINE (AFTER EMER SHUTDOWN) (PW1100G-A-71-00-00-00A-140A-B) MUST BE DONE. IF THESE PROCEDURES ARE NO CAN BE DONE TO THE TURBINE TIP SEALS.
PW1100G-C-71-00-03-03A-320A-B	Test No. 9 - Engine Acceptance Test	IF AN ENGINE STALL OCCURS DURING THIS TEST, THE THRUST LEVER MUST BE MOVED TO MINIMU MORE THAN ONE SECOND AFTER THE STALL. THE PROCEDURES SHOWN IN "OPERATE THE ENGIN SURGE OR STALL" (PW1100G-A-71-00-00-01A-140A-B) AND THE START THE ENGINE (AFTER EMER

EM Cautions (3Series) Report

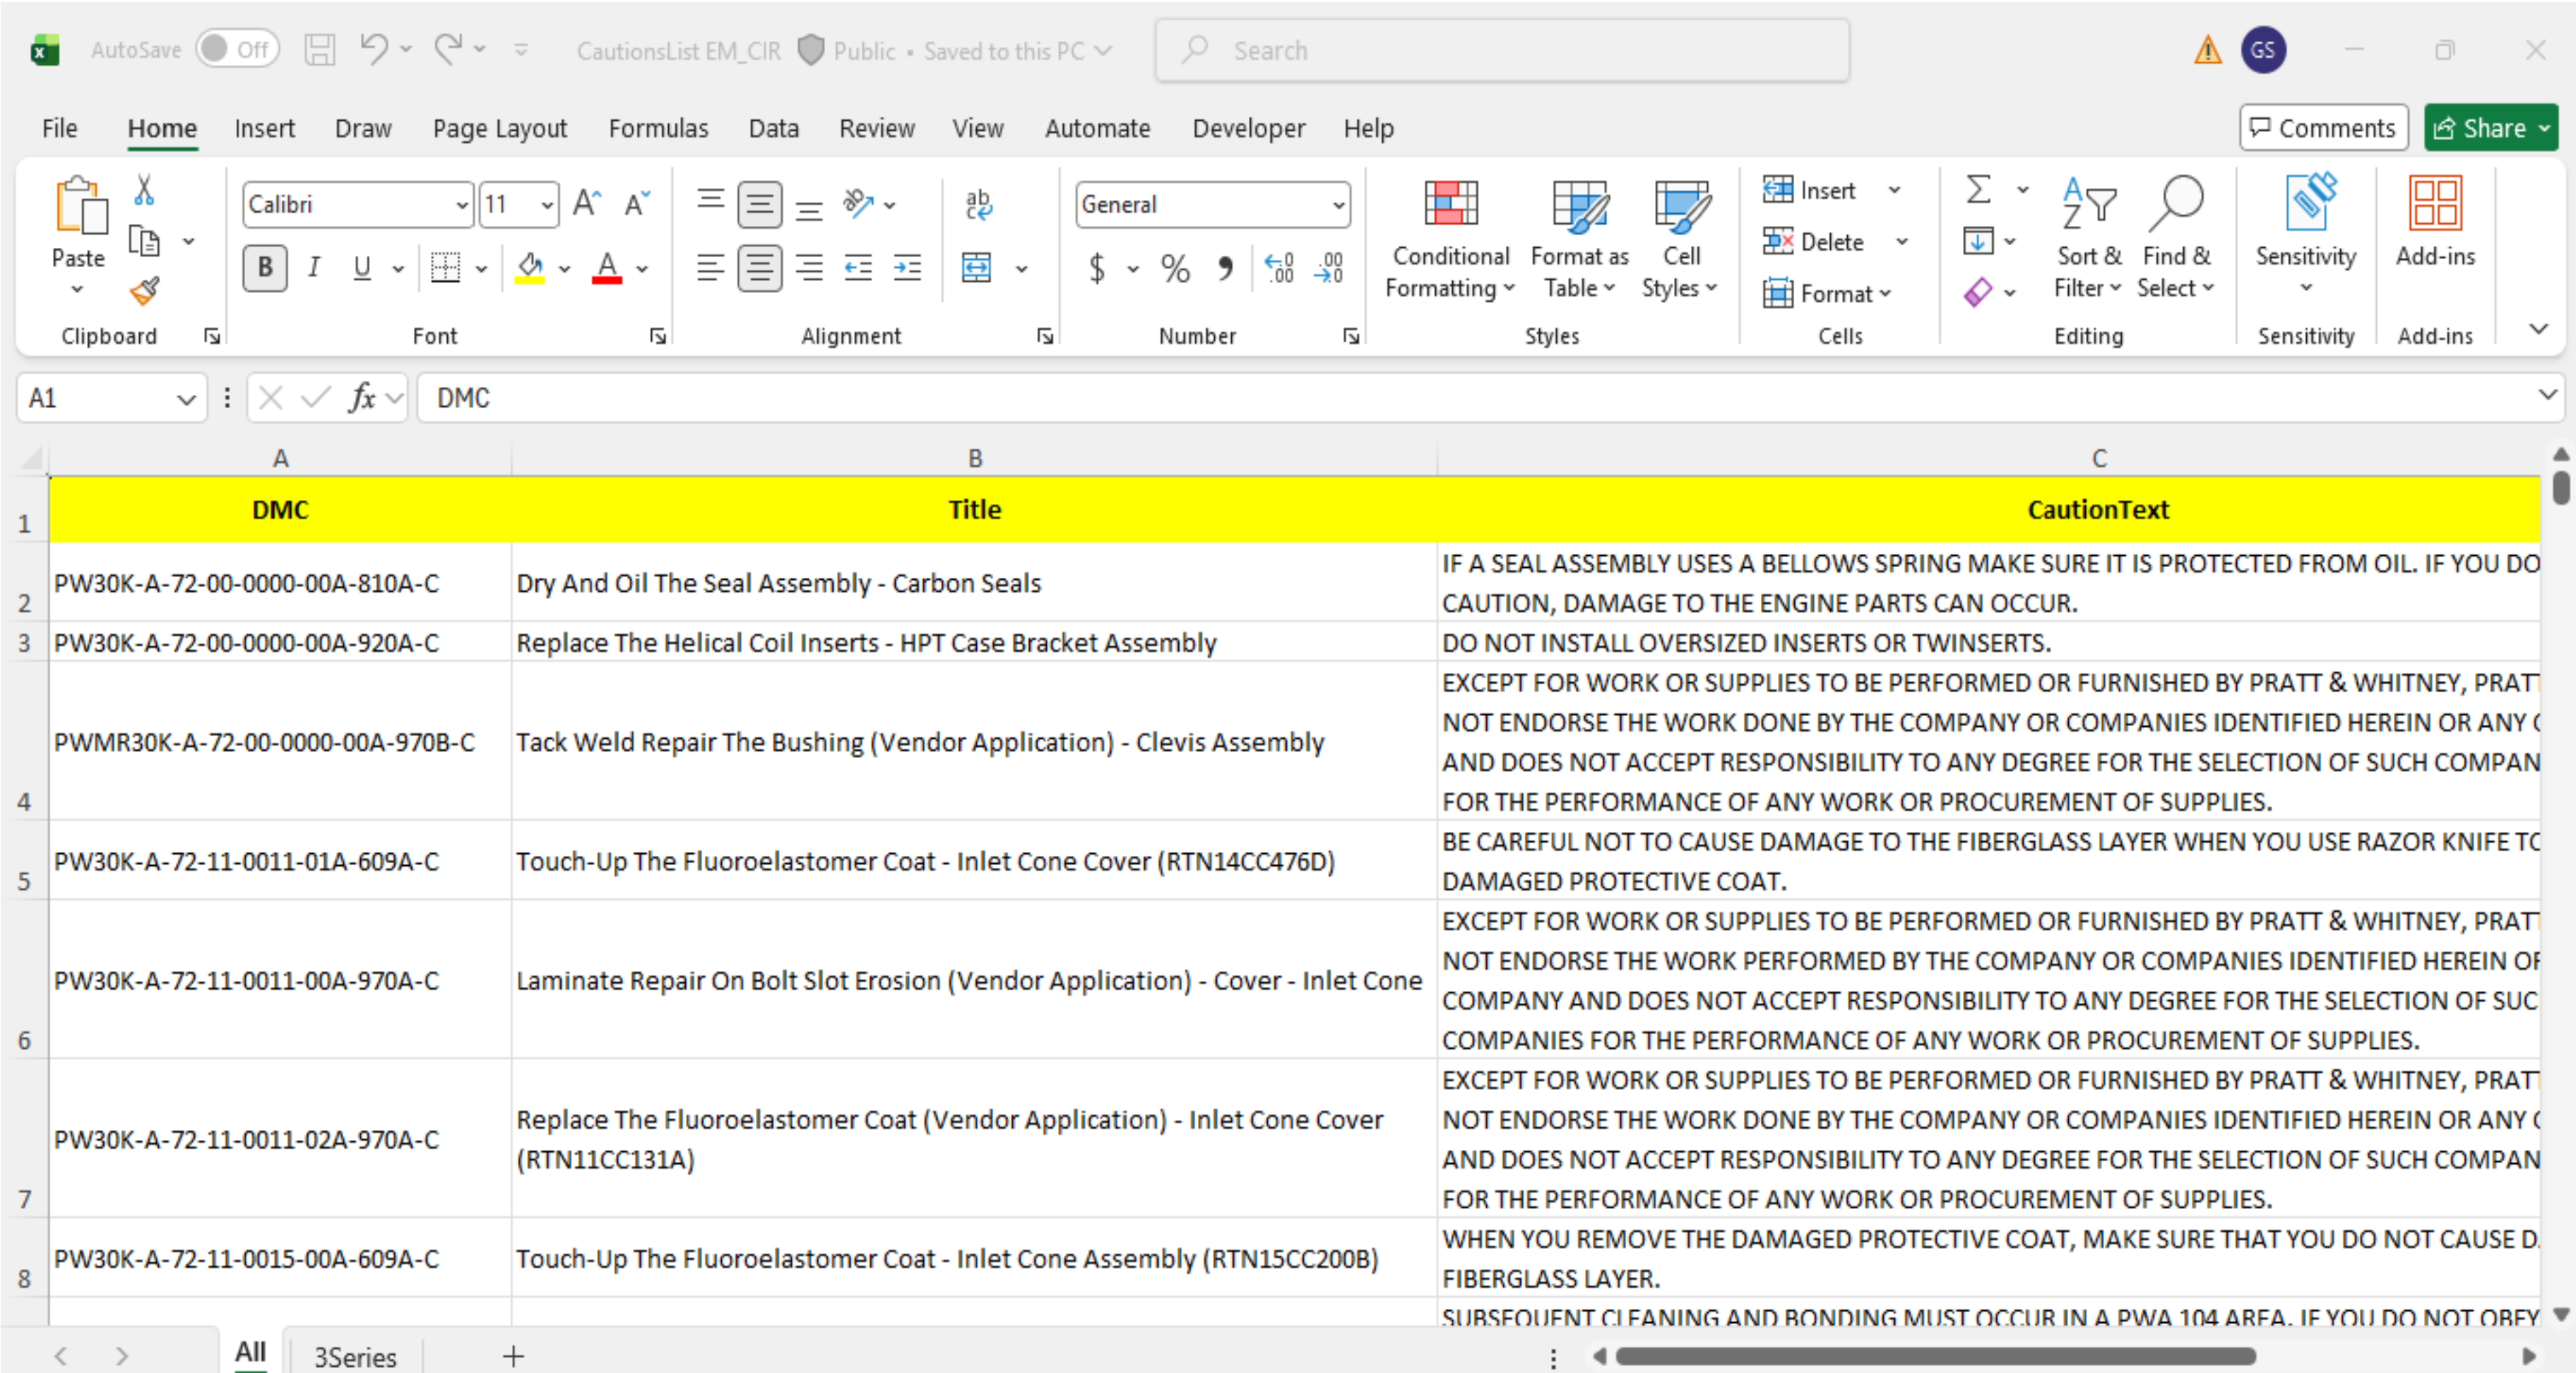

DMC	Title	CautionText
PW30K-A-72-00-0000-00A-810A-C	Dry And Oil The Seal Assembly - Carbon Seals	IF A SEAL ASSEMBLY USES A BELLOWS SPRING MAKE SURE IT IS PROTECTED FROM OIL. IF YOU DO CAUTION, DAMAGE TO THE ENGINE PARTS CAN OCCUR.
PW30K-A-72-00-0000-00A-920A-C	Replace The Helical Coil Inserts - HPT Case Bracket Assembly	DO NOT INSTALL OVERSIZED INSERTS OR TWINSERTS.
PWMR30K-A-72-00-0000-00A-970B-C	Tack Weld Repair The Bushing (Vendor Application) - Clevis Assembly	EXCEPT FOR WORK OR SUPPLIES TO BE PERFORMED OR FURNISHED BY PRATT & WHITNEY, PRAT NOT ENDORSE THE WORK DONE BY THE COMPANY OR COMPANIES IDENTIFIED HEREIN OR ANY AND DOES NOT ACCEPT RESPONSIBILITY TO ANY DEGREE FOR THE SELECTION OF SUCH COMPAN FOR THE PERFORMANCE OF ANY WORK OR PROCUREMENT OF SUPPLIES.
PW30K-A-72-11-0011-01A-609A-C	Touch-Up The Fluoroelastomer Coat - Inlet Cone Cover (RTN14CC476D)	BE CAREFUL NOT TO CAUSE DAMAGE TO THE FIBERGLASS LAYER WHEN YOU USE RAZOR KNIFE TO DAMAGED PROTECTIVE COAT.
PW30K-A-72-11-0011-00A-970A-C	Laminate Repair On Bolt Slot Erosion (Vendor Application) - Cover - Inlet Cone	EXCEPT FOR WORK OR SUPPLIES TO BE PERFORMED OR FURNISHED BY PRATT & WHITNEY, PRAT NOT ENDORSE THE WORK PERFORMED BY THE COMPANY OR COMPANIES IDENTIFIED HEREIN OF COMPANY AND DOES NOT ACCEPT RESPONSIBILITY TO ANY DEGREE FOR THE SELECTION OF SUC COMPANIES FOR THE PERFORMANCE OF ANY WORK OR PROCUREMENT OF SUPPLIES.
PW30K-A-72-11-0011-02A-970A-C	Replace The Fluoroelastomer Coat (Vendor Application) - Inlet Cone Cover (RTN11CC131A)	EXCEPT FOR WORK OR SUPPLIES TO BE PERFORMED OR FURNISHED BY PRATT & WHITNEY, PRAT NOT ENDORSE THE WORK DONE BY THE COMPANY OR COMPANIES IDENTIFIED HEREIN OR ANY AND DOES NOT ACCEPT RESPONSIBILITY TO ANY DEGREE FOR THE SELECTION OF SUCH COMPAN FOR THE PERFORMANCE OF ANY WORK OR PROCUREMENT OF SUPPLIES.
PW30K-A-72-11-0015-00A-609A-C	Touch-Up The Fluoroelastomer Coat - Inlet Cone Assembly (RTN15CC200B)	WHEN YOU REMOVE THE DAMAGED PROTECTIVE COAT, MAKE SURE THAT YOU DO NOT CAUSE D FIBERGLASS LAYER.
		SUBSEQUENT CLEANING AND BONDING MUST OCCUR IN A PWA 104 AREA. IF YOU DO NOT OBEY

EM_CIR Cautions Report

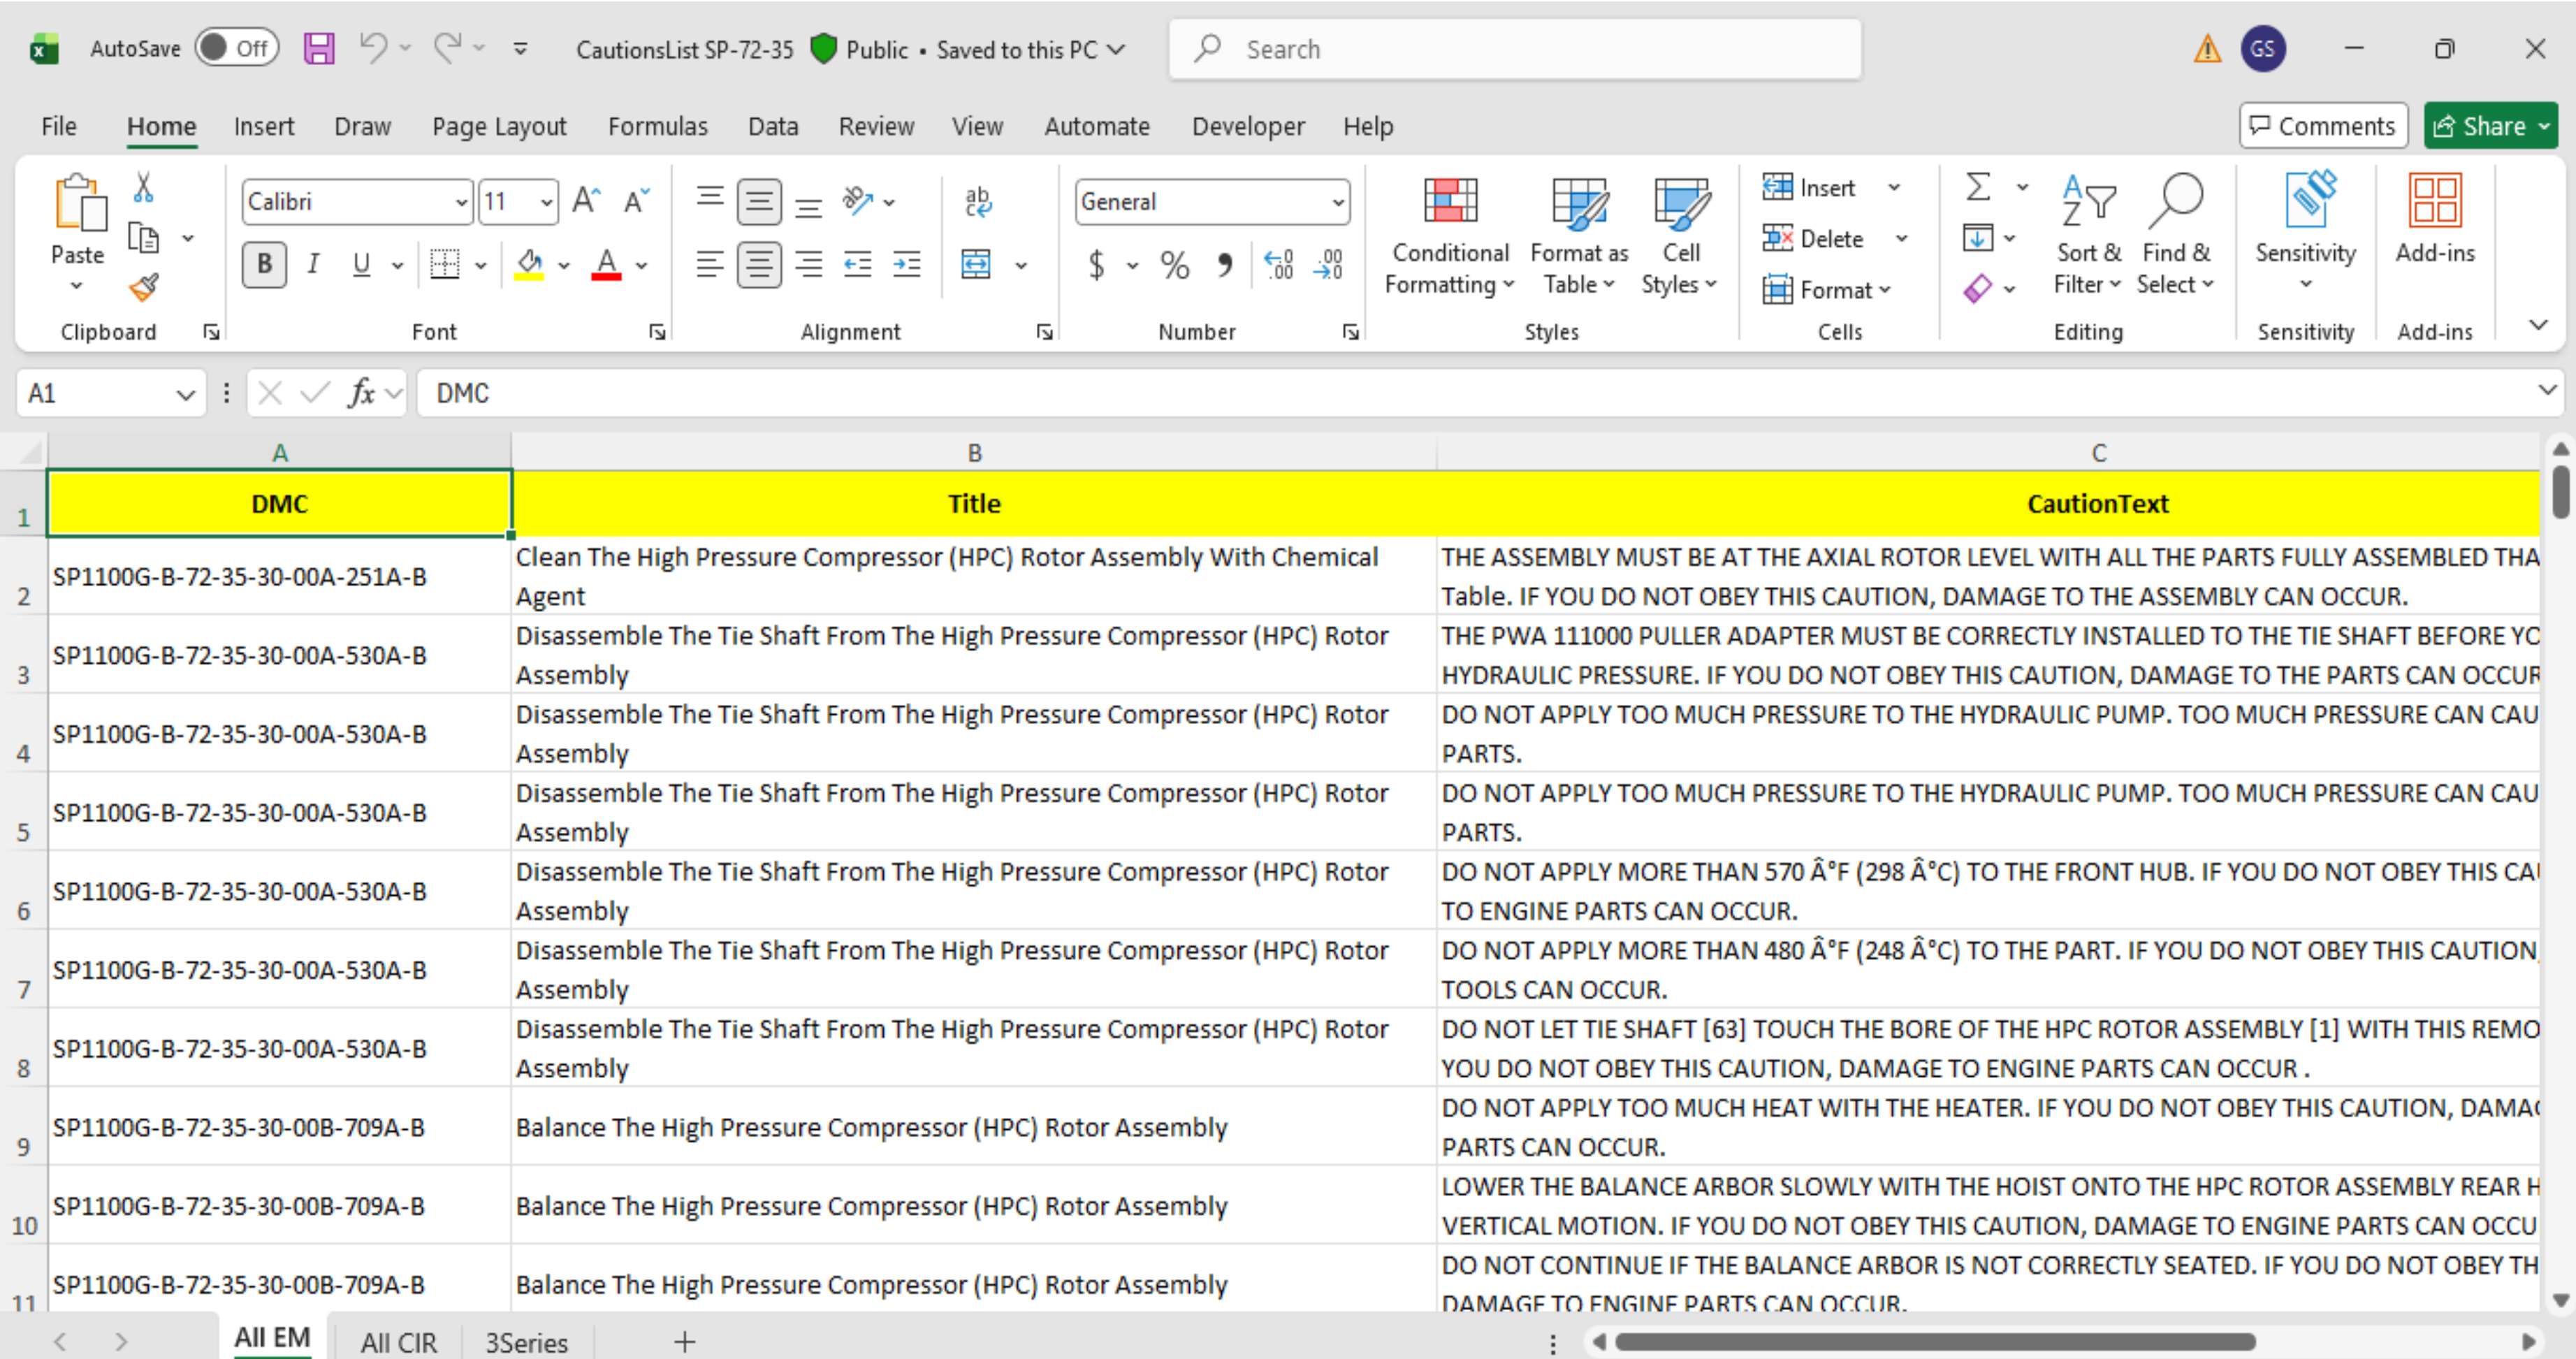

DMC	Title	CautionText
SP1100G-B-72-35-30-00A-251A-B	Clean The High Pressure Compressor (HPC) Rotor Assembly With Chemical Agent	THE ASSEMBLY MUST BE AT THE AXIAL ROTOR LEVEL WITH ALL THE PARTS FULLY ASSEMBLED THA Table. IF YOU DO NOT OBEY THIS CAUTION, DAMAGE TO THE ASSEMBLY CAN OCCUR.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	THE PWA 111000 PULLER ADAPTER MUST BE CORRECTLY INSTALLED TO THE TIE SHAFT BEFORE YC HYDRAULIC PRESSURE. IF YOU DO NOT OBEY THIS CAUTION, DAMAGE TO THE PARTS CAN OCCUR
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY TOO MUCH PRESSURE TO THE HYDRAULIC PUMP. TOO MUCH PRESSURE CAN CAU PARTS.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY TOO MUCH PRESSURE TO THE HYDRAULIC PUMP. TOO MUCH PRESSURE CAN CAU PARTS.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY MORE THAN 570 Â°F (298 Â°C) TO THE FRONT HUB. IF YOU DO NOT OBEY THIS CA TO ENGINE PARTS CAN OCCUR.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY MORE THAN 480 Â°F (248 Â°C) TO THE PART. IF YOU DO NOT OBEY THIS CAUTION, TOOLS CAN OCCUR.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT LET TIE SHAFT [63] TOUCH THE BORE OF THE HPC ROTOR ASSEMBLY [1] WITH THIS REMO YOU DO NOT OBEY THIS CAUTION, DAMAGE TO ENGINE PARTS CAN OCCUR .
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY TOO MUCH HEAT WITH THE HEATER. IF YOU DO NOT OBEY THIS CAUTION, DAMA PARTS CAN OCCUR.
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	LOWER THE BALANCE ARBOR SLOWLY WITH THE HOIST ONTO THE HPC ROTOR ASSEMBLY REAR H VERTICAL MOTION. IF YOU DO NOT OBEY THIS CAUTION, DAMAGE TO ENGINE PARTS CAN OCCU
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	DO NOT CONTINUE IF THE BALANCE ARBOR IS NOT CORRECTLY SEATED. IF YOU DO NOT OBEY TH DAMAGE TO ENGINE PARTS CAN OCCUR.

SP 72-35 Cautions Report

DMC	Title	CautionText
SP1100G-B-72-35-30-00A-251A-B	Clean The High Pressure Compressor (HPC) Rotor Assembly With Chemical Agent	THE ASSEMBLY MUST BE AT THE AXIAL ROTOR LEVEL WITH ALL THE PARTS FULLY ASSEMBLED THA Table. IF YOU DO NOT OBEY THIS CAUTION, DAMAGE TO THE ASSEMBLY CAN OCCUR.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	THE PWA 111000 PULLER ADAPTER MUST BE CORRECTLY INSTALLED TO THE TIE SHAFT BEFORE YC HYDRAULIC PRESSURE. IF YOU DO NOT OBEY THIS CAUTION, DAMAGE TO THE PARTS CAN OCCUR
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY TOO MUCH PRESSURE TO THE HYDRAULIC PUMP. TOO MUCH PRESSURE CAN CAU PARTS.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY TOO MUCH PRESSURE TO THE HYDRAULIC PUMP. TOO MUCH PRESSURE CAN CAU PARTS.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY MORE THAN 570 Â°F (298 Â°C) TO THE FRONT HUB. IF YOU DO NOT OBEY THIS CA TO ENGINE PARTS CAN OCCUR.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY MORE THAN 480 Â°F (248 Â°C) TO THE PART. IF YOU DO NOT OBEY THIS CAUTION, TOOLS CAN OCCUR.
SP1100G-B-72-35-30-00A-530A-B	Disassemble The Tie Shaft From The High Pressure Compressor (HPC) Rotor Assembly	DO NOT LET TIE SHAFT [63] TOUCH THE BORE OF THE HPC ROTOR ASSEMBLY [1] WITH THIS REMO YOU DO NOT OBEY THIS CAUTION, DAMAGE TO ENGINE PARTS CAN OCCUR .
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	DO NOT APPLY TOO MUCH HEAT WITH THE HEATER. IF YOU DO NOT OBEY THIS CAUTION, DAMA PARTS CAN OCCUR.
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	LOWER THE BALANCE ARBOR SLOWLY WITH THE HOIST ONTO THE HPC ROTOR ASSEMBLY REAR H VERTICAL MOTION. IF YOU DO NOT OBEY THIS CAUTION, DAMAGE TO ENGINE PARTS CAN OCCU
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	DO NOT CONTINUE IF THE BALANCE ARBOR IS NOT CORRECTLY SEATED. IF YOU DO NOT OBEY TH DAMAGE TO ENGINE PARTS CAN OCCUR.
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	DO NOT TIGHTEN THE PWA 111113 LIFT ADAPTER TOO MUCH. IF YOU DO NOT OBEY THIS CAUTIO THE TIE SHAFT THREADS CAN OCCUR.
SP1100G-B-72-35-30-00B-709A-B	Balance The High Pressure Compressor (HPC) Rotor Assembly	DO NOT TIGHTEN THE PWA 111435 LIFT ADAPTER TOO MUCH. IF YOU DO NOT OBEY THIS CAUTIO

SP 72-51 Cautions Report

Contact

IHI	Tatsuya Ito-San	ito0114@ihi-g.com
CYIENT Onsite	Suraj Prakash	prakash7808@ihi-g.com
CYIENT Offshore	Veerendra Kotari	Veerendra.Kotari@cyient.com

Thank You

Merci
Dank u wel
Danke
Gracias
ありがとうございました
شكرا