

EXTRACT Cautions FROM ENGINE MANUAL Tool

By Cyient Offshore Team

Table of contents

Sl.NO	Contents	Slide. No
<u>1</u>	<u>Objectives and background</u>	<u>3</u>
<u>2</u>	<u>Revision History</u>	<u>4</u>
<u>3</u>	<u>Tool Interface</u>	<u>5</u>
<u>4</u>	<u>Inputs</u>	<u>6</u>
<u>5</u>	<u>Tool functionality</u>	<u>7</u>
<u>6</u>	<u>Outputs</u>	<u>8</u>
<u>7</u>	<u>Contact</u>	<u>9</u>

- **Background and Objective**

BACKGROUND

-

OBJECTIVE


The objective of this tool is to automate the extraction of caution statements from


- Engine Manual
- Engine Manual CIR
- SP 72-35
- SP 72-51

- **Revision History**

Version	Date Updated	Remarks
V1.0	18-Aug-2026	Initial version of tool

- **Tool Interface**
- Below picture is the user interface of **Extract Cautions From Engine Manual Tool**.

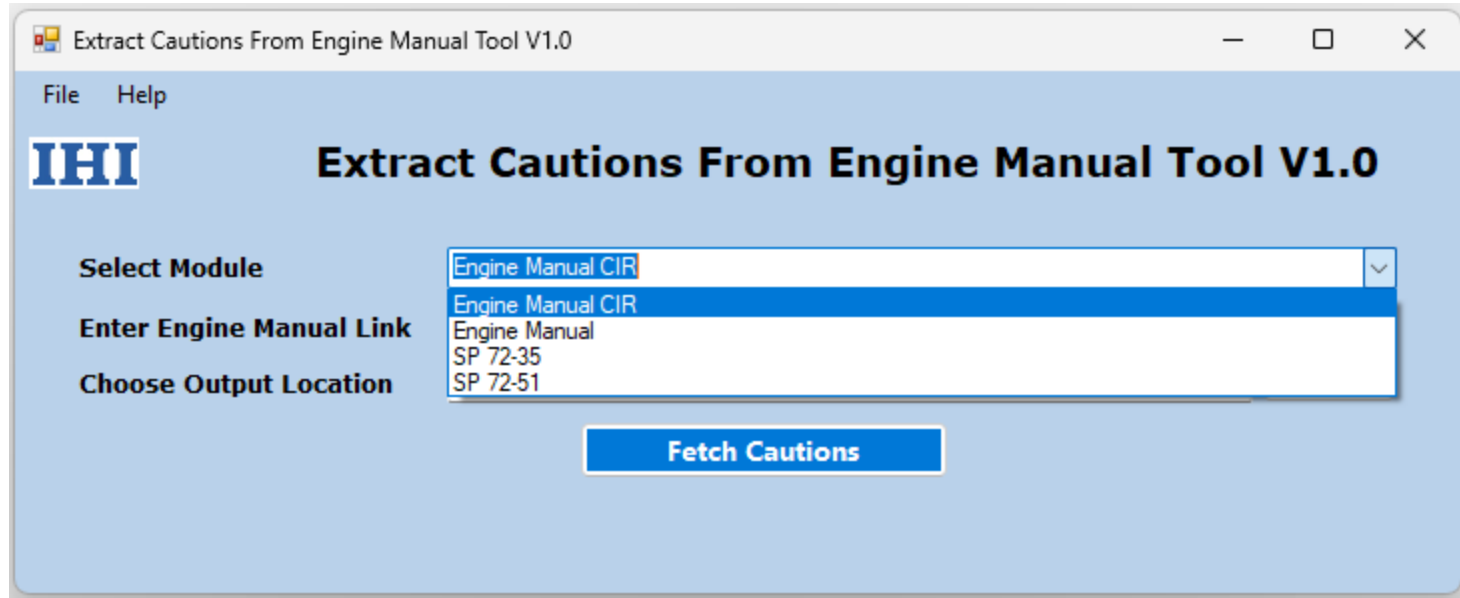

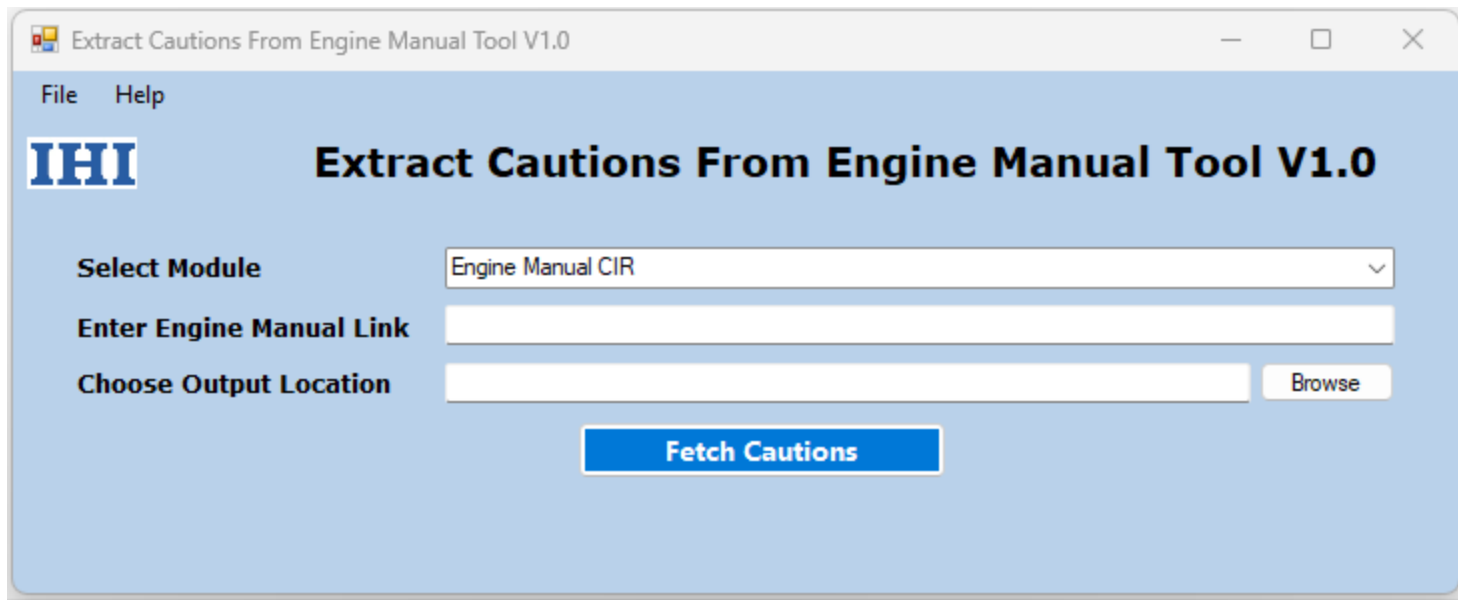

Inputs

The screenshot shows a software window titled "Extract Cautions From Engine Manual Tool V1.0". The window has a menu bar with "File" and "Help". Below the menu bar is the IHI logo and the title "Extract Cautions From Engine Manual Tool V1.0". The main interface contains three input fields and a button:

- Select Module:** A dropdown menu with "Engine Manual CIR" selected. A label "Module Type" with a downward arrow points to this dropdown.
- Enter Engine Manual Link:** A text input field. A label "Module Link" with an upward arrow points to this field.
- Choose Output Location:** A text input field followed by a "Browse" button. A label "Report Output location" with an upward arrow points to this field.
- Fetch Cautions:** A blue button located below the input fields.

Inputs

The screenshot shows a software window titled "Extract Cautions From Engine Manual Tool V1.0". The window has a menu bar with "File" and "Help". Below the menu bar is the IHI logo and the title "Extract Cautions From Engine Manual Tool V1.0". The main interface contains three input fields on the left, each with a label: "Select Module" (a dropdown menu showing "Engine Manual CIR"), "Enter Engine Manual Link" (a text box), and "Choose Output Location" (a text box with a "Browse" button next to it). A blue "Fetch Cautions" button is centered below these fields. Four teal arrows point from external labels to the inputs: "Module Type" points to the "Select Module" dropdown, "Module Link" points to the "Enter Engine Manual Link" text box, and "Report Output location" points to the "Choose Output Location" text box. A fourth arrow points from the "Fetch Cautions" button to the "Report Output location" label.

Module Type

File Help

IHI

Extract Cautions From Engine Manual Tool V1.0

Select Module Engine Manual CIR

Enter Engine Manual Link

Choose Output Location Browse

Fetch Cautions


Module Link

Report Output location

Tool functionality

- Provide the required inputs and click on Fetch Cautions button
- Tool will generate the list of cautions for the selected module.

Cautions Report



AutoSaveOff

CautionsListPublic

Search

FileHomeInsertDrawPage LayoutFormulasDataReviewViewAutomateDeveloperHelpAcrobat

Paste

Clipboard

Font

Alignment

Number

Styles

Cells

Conditional Formatting

Format as Table

Cell Styles

Insert

Delete

Format

Cells

Editing

Sort & Filter

Find & Select

Sensitivity

Add-ins

Adobe Acro...

Comments

Share

A1

DMC

	A	B	C	D	E	F	G	H	I	J	K	L
1	DMC	Title	CautionText									
2	PW1100G-A-24-21-01-00A-222A-D	Integrated Drive Generator (IDG) - Drain Oil	SOLVENTS THAT CONTAIN CHLORINE SHOULD NOT BE USED TO CLEAN EQUIPMENT REQUIRED TO SERVICE I									
3	PW1100G-A-24-21-01-00A-222A-D	Integrated Drive Generator (IDG) - Drain Oil	SOME HOT OIL UNDER PRESSURE CAN COME OUT OF THE OVERFLOW DRAIN HOSE WHEN IT IS CONNECTED									
4	PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	YOU MUST USE THE CORRECT SPECIFICATION OF CLEAN NEW OIL WHEN YOU ADD OR REPLACE THE OIL IN T									
5	PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	SOLVENTS THAT CONTAIN CHLORINE SHOULD NOT BE USED TO CLEAN EQUIPMENT REQUIRED TO SERVICE I									
6	PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	DO NOT DO THIS TASK FOR A DISCONNECTED INTEGRATED DRIVE GENERATOR, THE OPERATION OF A DEFE									
7	PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	YOU MUST USE THE CORRECT SPECIFICATION OF CLEAN NEW OIL WHEN YOU ADD OR REPLACE THE OIL IN T									
8	PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	MAKE SURE THE DRAIN VALVE HOSE IS CONNECTED TO LET THE OIL DRAIN TO THE CORRECT LEVEL IN THE IC									
9	PW1100G-A-24-21-01-00A-292A-D	Integrated Drive Generator (IDG) - Change Of Oil	DO NOT DISCONNECT THE OVERFLOW DRAIN HOSE UNTIL THE FLOW DECREASES TO SINGLE DROPS.									
10	PW1100G-A-24-21-01-00A-520A-D	Remove The AC Generator - Integrated Drive Generator (IDG)	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTEN THE TUE									
11	PW1100G-A-24-21-01-00A-520A-D	Remove The AC Generator - Integrated Drive Generator (IDG)	MAKE SURE THAT YOU APPLY ONLY SUFFICIENT PRESSURE WITH THE JACK TO HOLD THE WEIGHT OF THE IDC									
12	PW1100G-A-24-21-01-00A-720A-D	Install The AC Generator - Integrated Drive Generator (IDG)	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTEN THE TUE									
13	PW1100G-A-24-21-01-00A-720A-D	Install The AC Generator - Integrated Drive Generator (IDG)	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTEN THE TUE									
14	PW1100G-A-24-21-03-00A-520A-D	Remove The AC Generator Oil Filter Elements	DO NOT LET ENGINE HYDRAULIC FLUID SPILL ON THE ENGINE, YOU MUST IMMEDIATELY REMOVE HYDRAULI									
15	PW1100G-A-24-21-03-00A-720A-D	Install The AC Generator Oil Filter Elements	DO NOT LET ENGINE HYDRAULIC FLUID SPILL ON THE ENGINE, YOU MUST IMMEDIATELY REMOVE HYDRAULI									
16	PW1100G-B-24-21-08-00A-520A-D	Remove The AC Generator Fuel/Oil Differential Pressure Sensor	DO NOT LET FUEL SPILL ON THE ENGINE, YOU MUST IMMEDIATELY REMOVE UNWANTED FUEL WITH A CLOT									
17	PW1100G-C-24-21-08-00A-520A-D	Remove The AC Generator Fuel/Oil Differential Pressure Sensor (F150)	DO NOT LET FUEL SPILL ON THE ENGINE, YOU MUST IMMEDIATELY REMOVE UNWANTED FUEL WITH A CLOT									
18	PW1100G-A-24-21-49-00A-520A-D	Remove The AC Generator Oil Tubes	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTEN THE TUE									
19	PW1100G-A-24-21-49-00A-720A-D	Install The AC Generator Oil Tubes	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTEN THE TUE									
20	PW1100G-A-24-21-49-00A-720A-D	Install The AC Generator Oil Tubes	YOU MUST USE A SECOND WRENCH TO HOLD THE MATING PARTS WHEN YOU LOOSEN OR TIGHTEN THE TUE									
21	PW1100G-A-24-21-61-00A-520A-D	Remove The AC Generator Control Harness	DO NOT BEND OR TWIST THE HARNESS TOO MUCH, IF YOU DO, DAMAGE TO THE HARNESS CAN OCCUR.									

<>

Cautions

IHI	Tatsuya Ito-San	<u>ito0114@ihi-g.com</u>
CYIENT Onsite	Suraj Prakash	<u>prakash7808@ihi-g.com</u>
CYIENT Offshore	Veerendra Kotari	<u>Veerendra.Kotari@cyient.com</u>

Thank You

Merci

Dank u wel

Danke

Gracias

ありがとうございました

شكرا