INTEROFFICE MEMORANDUM

To: CISO

From: Team 02

Date: October 24, 2026

Subject: SNMP Implementation

Summary:

We have properly configured SNMP within our network. This document displays our Network hosts with their associated IPs and SNMP Public Community String.


We chose to implement SNMPv2 because it is more secure than SNMPv1. SNMPv1 only supports 32 bit counters whereas SNMPv2 supports 64 bit counters. This means that SNMPv2 is much more reliable in keeping a total count of the events that occurred over the protocol. SNMPv2 also has added functionality to access information via a bulk access function.

Linux Implementation:

In order to implement SNMP of the Linux devices we followed these steps:

1. Install SNMP using sudo apt install snmpd
2. Edit the configuration file located at /etc/snmp/snpmd.conf
3. Bind addresses with the following command “adentAddress udp:161”
4. Add the line “rocummunity CCDC_SNMP_RO_26 default”

This screenshot shows the successful configuration of SNMP on the Ubuntu Webmail device:

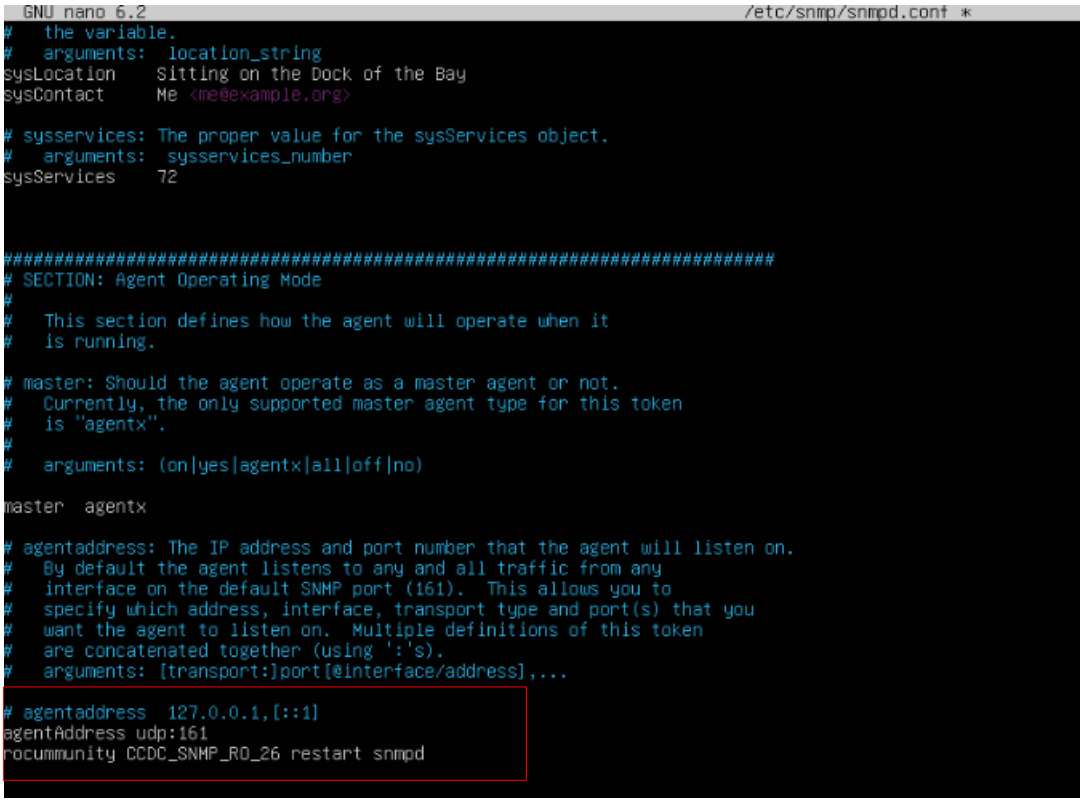


Windows Implementation :

In order to implement SNMPv2 on the Windows devices, we followed these steps:

1. In an Adminstrator PowerShell prompt, run “Install-WindowsFeature SNMP-Service -IncludeManagementTools
2. Open services.msc and find the SNMP service and view its properties.
3. Navigate to the security tab
4. Add the community string “CCDC_SNMP_RO_26” under “Accepted Community Names”
5. Select “Accept SNMP from any host”
6. Restart the service.

This screenshot shows the successful configuration of SNMP on the AD Windows device:

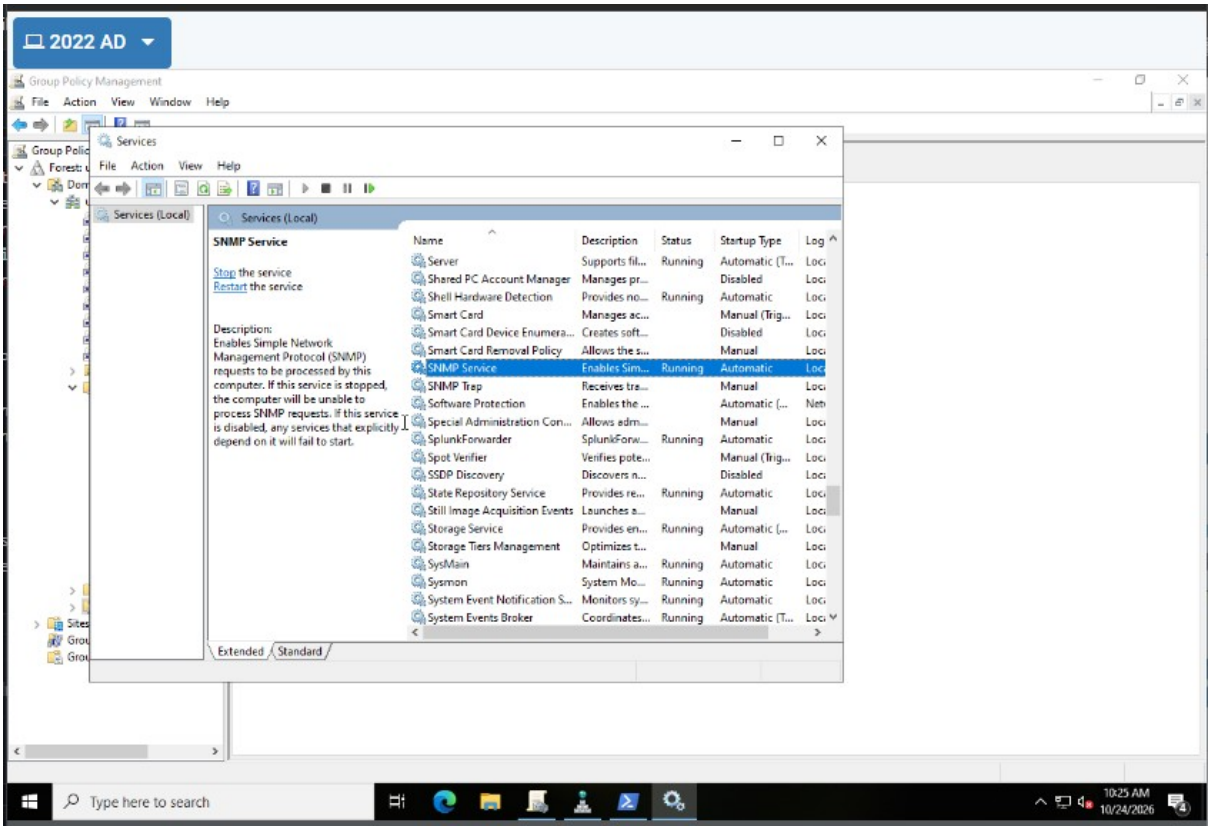

Host Name	External IP Address / 'Public' IP	Public Community String (Read-Only)
Rocky Ecom	172.25.22.10	CCDC_SNMP_RO_26
Ubuntu Email	172.25.22.15	CCDC_SNMP_RO_26
Debian Splunk	172.25.22.20	CCDC_SNMP_RO_26
2022 AD	172.25.22.100	CCDC_SNMP_RO_26
2019 MSSQL	172.25.22.120	CCDC_SNMP_RO_26
Ubuntu Wkst	172.31.22.2	CCDC_SNMP_RO_26

Host Name	External IP Address / 'Public' IP	Public Community String (Read-Only)
Windows 11 Wks	172.31.22.2	CCDC_SNMP_RO_26
Kali	172.31.22.2	CCDC_SNMP_RO_26
Palo Alto	172.20.240.200 (Management IP)	CCDC_SNMP_RO_26
VyOS Router	172.31.22.2/29 (External IP)	CCDC_SNMP_RO_26

This screenshot shows that UDP port 161 which is what SNMP runs on, allowing SNMP to successfully connect to all devices.



If there are any concerns, questions, or clarifications, please do not hesitate to reach out.

With Regards,
Team 07