

Nail+: Sensing the Strains From Fingernail As Always-Available Input

1st Author Name

Affiliation

City, Country

e-mail address

2nd Author Name

Affiliation

City, Country

e-mail address

3rd Author Name

Affiliation

City, Country

e-mail address

ABSTRACT

We present Nail+, a nail augmented device that sense user's fingernail contour and bend when force is applied on surface. By using 3×3 array of 0.2mm strain gauges, Nail+ is small enough to fit on fingernail, and it is flexible and stretchable. We evaluate this interface in motion and motionless mode. The system can distinguish swipe gestures with high accuracy(93.2%). For motionless mode, it can achieved 85.6% accuracy for classifying with different kinds of finger posture. Since the device is always available input, it allows user to perform swipe gestures on surfaces around or touch postures on touch screen devices to enable different kinds of application usage. We also show some examples applications such as quickly swipe on surfaces around to control smart TV or touching on touchscreen devices to enable different application short cuts.

Author Keywords

Natural User Interface (NUI); Wearable electronics; fingernail; Strain gauges; Machine Learning; Nail pressure;

ACM Classification Keywords

H.5.m. Information Interfaces and Presentation (e.g. HCI): Input devices and strategies (e.g., mouse, touchscreen)

INTRODUCTION

Recent works has seen new proposal for nail augmented device in body-attach computing. Fingernail has been widely adopt due to its characteristic of non-perception area. And it also has the advantages of its non-obstructive and most promising place for easy installation and removing[9]. Moreover, nail art is proposed in previous work[12, 10]. We believe that using nail as mounted location will become more popular in the future.

Early works on fingernail mounted devices developed schemes to augment fingernail with a output of display and sensor. NailDisplay[12] tried to mounted a visual display on top of fingernail to avoid the big thumb problem on touchscreen. Ando et al.[1] proposed to put a small voice coil to

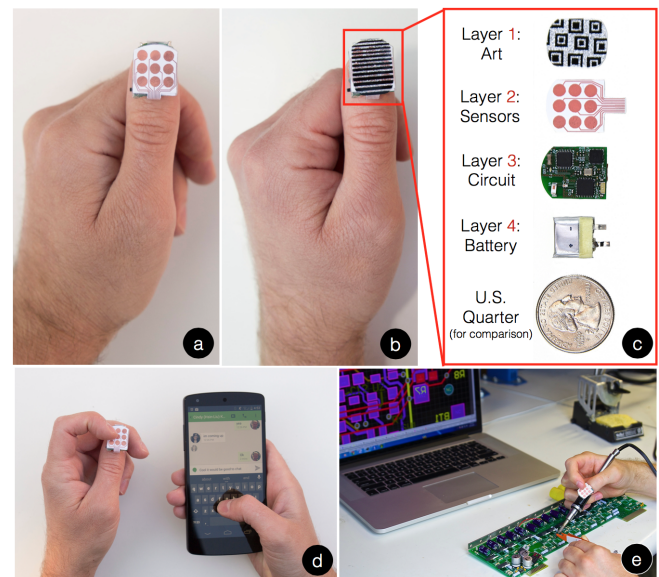


Figure 1. Nail+ THIS IS A PLACE HOLDER FOR Nail+

control the tactile feedback from surface by changing wave-forms. More than that, FingerSight[5] implemented a device consisted with camera to extract the information from the surrounding. Previous research also demonstrated using nail-mounted device to enrich input area. NailO[10] proposed a capacitive sensor grid on top of the fingernail to sense swipe and tap gestures. uTrack[4] and FingerPad[2] added on the fingertip with a small magnet, and using a magnetic field tracks the finger movement. TouchSense[7] used 3-axis accelerometer to detect finger postures to switch different modes of input. These works has proved that the device on top of fingernail's advantages. However, these works only instrument the device on top of the fingernail without using the characteristic of fingernail itself.

This brings us to think about using fingernail as a input property proposed in [8], which used a computer vision for sensing force touch. There are also works using fingernail itself as a sensing part. Mascaro et al.[11] also implemented a nail-mounted device for observing changes in the reflection intensity on fingernail. (one more work!) However, the sensing technique of it still left in question for recognition of swiping gestures and it also is limited to sense a force which is not enough for out daily use.

Paste the appropriate copyright statement here. ACM now supports three different copyright statements:

- ACM copyright: ACM holds the copyright on the work. This is the historical approach.
- License: The author(s) retain copyright, but ACM receives an exclusive publication license.
- Open Access: The author(s) wish to pay for the work to be open access. The additional fee must be paid to ACM.

This text field is large enough to hold the appropriate release statement assuming it is single spaced.

Every submission will be assigned their own unique DOI string to be included here.

In order to explore better sensing technique of nail augmented device, we aimed to design a device that achieved following designs. First, it has the ability of sensing simple gestures on surface like swiping and tapping. Second, it has no restrictions of input area which can enable user to perform gestures on surfaces around. Finally, it should come with light and thin form factor due to the place of fingernail. The proposed design will definitely be a novel input device for increasing the mobility of touch screen. It also can be perform gestures anywhere without physical effort.

In this paper, we developed a prototype, Nail+ (Figure 1), use a 3×3 array of strain gauges sensor to explore the strains from fingernail as input technique.

In summary, the main contributions of this paper are as follows:

- A novel fingernail input interface presented and explores the ability of fingernail's strains as a input technique.
- We develop a nail-mounted prototype can detect swipe gestures and postures of fingernail.
- We conducted two system evaluations of the prototype and implemented scenarios to explore interactions.

PROTOTYPE DESIGN

In order to design a nail augmented device to sense a touch or gesture on surfaces, we have few mainly requirements. First of all, the device must be small enough to fit within fingernail. Second, it should have ability of sensing slightly changes of the strain from fingernail. Last but not least, it has to be reusable and easy for installation and removing. Based on above of requirements, we derived that using a 2D array of 0.2mm strain gauges is the appropriate solution for this prototype.

Hardware

We developed Nail+ using a 3×3 array of 120-ohm 0.2-mm strain gauges for sensing part (Shown in Figure 1). At the bottom of the strain gauges, we used a stretchable and flexible artificial-skin to stick sensors on user's fingernail. The size of it is only 0.8cm×1cm which is smaller than 1 cent of US dollar. And each of the strain gauge is directly wired to the computing part. The computing hardware is consisted with an Arduino Nano board and two 8-to-1 analog switches (MAX4617, Maxim Integrated), a dual digital potentiometer (AD5231, Analog Devices), and two instrumental amplifiers (INA333 and INA122U, Analog Devices).

The diagram of the computing hardware is shown in Figure 2. First, the multiplexers are sequentially selected to connect one of the strain gauges to read analog value. Once a sensor is selected, the sensor became one of the 4 resistors on the Wheatstone bridge. When the forces apply, the strain of fingernail let the sensor slight changed which caused the ohm value of strain gauges lower or higher.

Then, the final analog value is generated by the voltage difference on bridge and amplify the signal of the difference which is made by strains. Due to the requirement of very small strain

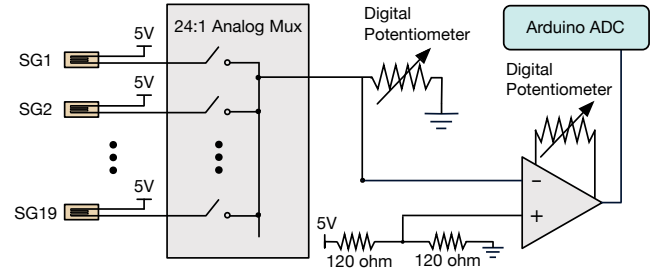


Figure 2. The complete circuit diagram. Note that SG stands for strain gauge. The 24:1 analog multiplexer is practically made up of 3 analog multiplexers.

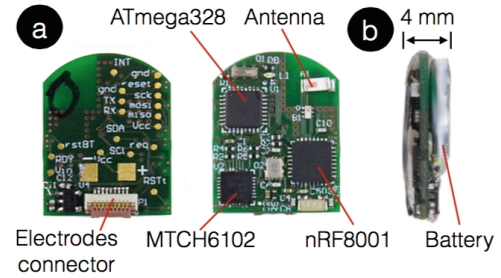


Figure 3. The complete circuit diagram. Note that SG stands for strain gauge. The 24:1 analog multiplexer is practically made up of 3 analog multiplexers.

from fingernail, we used two amplifiers to magnify the original analog signal which is approximately 4000 times of it. Finally, the digital potentiometer is used for calibrating the resistance when there is no forces apply.

Gesture / Posture Recognition

To deliver better recognition rate, a support vector machine (SVM) is chose. SVM is a way to distinguish the pattern with vectors. We used LIBSVM tool[3], a popular machine learning opensource library for SVM. Since the different of the input data sets, we implemented two algorithm specifically for swipe gestures which are sequentially and time based data (Motion mode) and finger posture which is a static raw data (Motionless mode). In motion mode, sequentially data is pre-processed by accumulate difference to the first data when the gesture begin. At the end, the sequentially data is processed to be one data which determine how much difference to each strain gauges caused by the movement. In motionless mode, raw data is directly used for machine learning. Finally, we scale each feature to the range of -1 to 1 and then train a multi-class SVM classifier with a Radial Basis Function (RBF) kernel.

Pilot Study : Human Behavior and Size of Fingernail

We recruited 10 participants (7 male, 3 female) from ages 20 and 24 (mean 21.2) which are all right-handed. Before this study, we measured user index finger's fingernail width and height. After that, we requested user to perform tap gesture just like a touch screen on electronic load-cell to measure how much pressure applied on the surface. After the study, the average of tap pressure measured as 0.82N(SD=0.26). And the

average of fingernail width is 1.145cm(SD=0.14) and height is 1.21cm(SD=0.17).

SYSTEM EVALUATION

The goal of the study is to explore whether the system is capable for classifying different kinds of swipe gestures and finger posture angles in different kinds of pressure level.

Participants

We recruited 10 participants (7 male, 3 female) between the ages of 20 and 23. All participants are right-handed and drew with their right index fingers on the surface. Each participants received \$5 after one hour experiment.

Apparatus

The apparatus is shown in Fig???. We used the load-cell which is the same in our pilot study. In this experiment, we put a 9DOF sensor on user's index finger, it is only used for checking whether user is performing the correct position and angle. The surface we used in our study is medium-density fibreboard.

Task and Procedure

Motion Mode

We chose 8 direction as shown in Fig???. Users are requested to perform swipe gestures shown on computer screen and press space from the beginning and the end of the gesture. On the desk, we draw 8 direction of line to insure swipe angle is correct. Each direction are collect 10 sets of sequentially data which has total 80 gestures for each user. Before the study, a calibration is needed for the first time wearing, and no calibration within this study.

Motionless Mode

In each trail, the participants were instructed to adjust their finger pitch and roll angle which are selected from [6]. We only chose some part of angle which are easy to identify for users. The forces are chosen from our pilot user study which are chosen as average force(0.8N), one SD forces(0.6N, 1.0N), two SD forces(0.4N, 1.2N) as presented in Fig???. The participants are asked to straighten finger during all experiment. In front of the user, there is a screen showing current(sensing from 9DOF and load-cell sensor) and instructed angle and force. Before each trail, participants are requested to return the initial position.

Results

Accuracy: is defined as the number of correctly classified samples divided by the total number of samples. *Accuracy:* is defined as the number of correctly classified samples divided by the total number of samples. *Accuracy:* is defined as the number of correctly classified samples divided by the total number of samples. *Accuracy:* is defined as the number of correctly classified samples divided by the total number of samples. *Accuracy:* is defined as the number of correctly classified samples divided by the total number of samples.

Motion Mode

The accuracy due to chance was 10%. Off-line accuracy was computed using 10-fold cross-validation of the evaluation data. The mean accuracy across all participants was

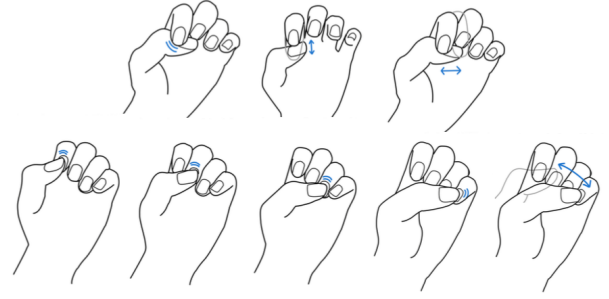


Figure 4. Swipe Gestures

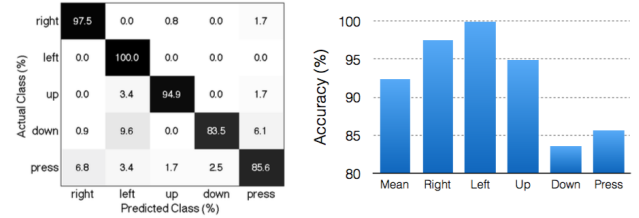


Figure 5. Motion mode: Confusing Matrix

95% (SD: 2.7%). If we only consider four swipe gesture, the system can achieved 99.5%(SD: 1.2%). The misdetection is shown in Fig??, and the caused of the this due to the user use different posture angle for performing the same gesture.

Motionless Mode

The accuracy due to chance was 20%. Off-line accuracy was computed using 10-fold cross-validation of the evaluation data. The mean accuracy across all participants was 85.6% (SD: 3.7%). The misdetection is shown in Fig??, and the caused of the this due to the user sometimes perform postures directly using nail to touch the surface which caused strain gauges different value. We also run 10-fold cross-validation for our pressure value. It turns out that the device cannot distinguish the difference of slightly changes of pressure. The device only can distinguish the pressure level of difference with 90% accuracy when it comes to 0.4N with 1.2N.

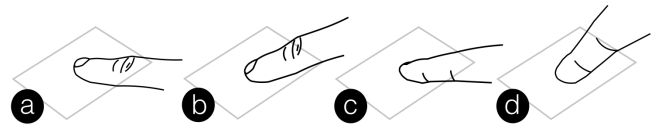


Figure 6. Posture Set: (a) pitch 15 degree, (b) pitch 45 degree, (c) pitch 15 degree and roll 45 degree, (d) pitch 45 degree and roll 45 degree

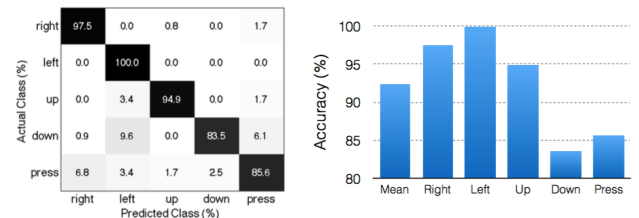


Figure 7. Motionless mode: Confusing Matrix

EXAMPLE APPLICATION

Based on the advantage of Nail+, we show two examples using this new interaction technique.

Remote control

LIMITATION AND FUTURE WORK

Gesture Input

CONCLUSION

In this paper, we implemented a new novel interaction technique which use the strains as input. We also developed a device called Nail+ which has the ability for exploring the strain from fingernail. The device for swipe gestures on surface can be distinguished in a high accuracy(93.2%). For the finger posture, Nail+ can identify five different kinds of finger posture. The system is attractive for always-available input for surface around and unobtrusive.

REFERENCES

1. Hideyuki Ando, Eisuke Kusachi, and Junji Watanabe. 2007. Nail-mounted Tactile Display for Boundary/Texture Augmentation. In *Proceedings of the International Conference on Advances in Computer Entertainment Technology (ACE '07)*. 292–293.
2. Liwei Chan, Rong-Hao Liang, Ming-Chang Tsai, Kai-Yin Cheng, Chao-Huai Su, Mike Y. Chen, Wen-Huang Cheng, and Bing-Yu Chen. 2013. FingerPad: Private and Subtle Interaction Using Fingertips. In *Proceedings of the 26th Annual ACM Symposium on User Interface Software and Technology (UIST '13)*. 255–260.
3. Chih-Chung Chang and Chih-Jen Lin. 2011. LIBSVM: A library for support vector machines. *ACM Transactions on Intelligent Systems and Technology* 2 (2011), 27:1–27:27. Issue 3. Software available at <http://www.csie.ntu.edu.tw/~cjlin/libsvm>.
4. Ke-Yu Chen, Kent Lyons, Sean White, and Shwetak Patel. 2013. uTrack: 3D Input Using Two Magnetic Sensors. In *Proceedings of the 26th Annual ACM Symposium on User Interface Software and Technology (UIST '13)*. 237–244.
5. John Galeotti, Samantha Horvath, Roberta Klatzky, Brock Nichol, Mel Siegel, and George Stetten. 2008. FingerSight&Trade;: Fingertip Control and Haptic Sensing of the Visual Environment. In *ACM SIGGRAPH 2008 New Tech Demos (SIGGRAPH '08)*. Article 16, 1 pages.
6. Christian Holz and Patrick Baudisch. 2011. Understanding Touch. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '11)*. 2501–2510.
7. Da-Yuan Huang, Ming-Chang Tsai, Ying-Chao Tung, Min-Lun Tsai, Yen-Ting Yeh, Liwei Chan, Yi-Ping Hung, and Mike Y. Chen. 2014. TouchSense: Expanding Touchscreen Input Vocabulary Using Different Areas of Users' Finger Pads. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '14)*. 189–192.
8. Sungjae Hwang, Dongchul Kim, Sang-won Leigh, and Kwang-yun Wahn. 2013. NailSense: Fingertip Force As a New Input Modality. In *Proceedings of the Adjunct Publication of the 26th Annual ACM Symposium on User Interface Software and Technology (UIST '13 Adjunct)*. 63–64.
9. Azusa Kadomura and Itiro Siio. 2014. MagNail: Augmenting Nails with a Magnet to Detect User Actions Using a Smart Device. In *Proceedings of the 2014 ACM International Symposium on Wearable Computers (ISWC '14)*. 135–136.
10. Hsin-Liu (Cindy) Kao, Artem Dementyev, Joseph A. Paradiso, and Chris Schmandt. 2015. NailO: Fingernails As an Input Surface. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems (CHI '15)*. 3015–3018.
11. S.A. Mascaro and H.H. Asada. 2001. Photoplethysmograph fingernail sensors for measuring finger forces without haptic obstruction. *Robotics and Automation, IEEE Transactions on* 17, 5 (Oct 2001), 698–708. DOI : <http://dx.doi.org/10.1109/70.964669>
12. Chao-Huai Su, Liwei Chan, Chien-Ting Weng, Rong-Hao Liang, Kai-Yin Cheng, and Bing-Yu Chen. 2013. NailDisplay: Bringing an Always Available Visual Display to Fingertips. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '13)*. 1461–1464.