

POWER: 14500 Li-ion (4.2V max only) -> reverse-polarity P-FET -> slide switch -> VBAT




MIC BIAS (always-on, independent of MICBIAS so PTT works in idle)

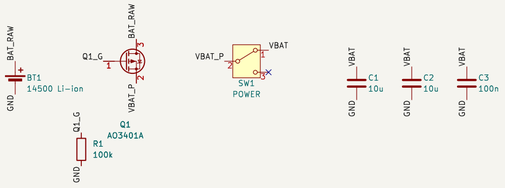


4-POLE CTIA JACK: T/R1=air-tube earpiece, R2=mic return, S=MIC




PTT DETECT: PTT shorts MIC-GND (1.25 ohm meas.) -> PTT_N low -> U1 P0_2 (PLAY/PAUSE)

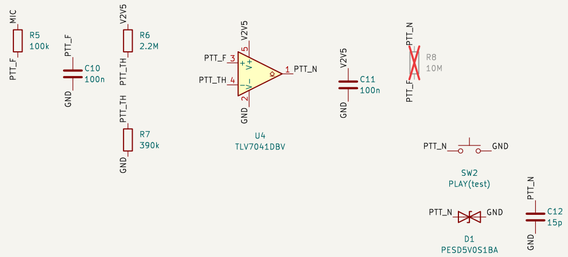


U1 AUDIO OUT (Config: Speaker Output = Single End): line to U2 Aux-in + optional air-tube earpiece

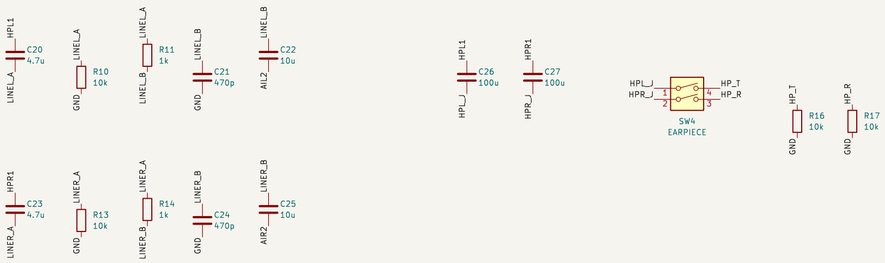



U1: BM83 #1 standard firmware (Embedded) — HFP/A2DP sink, throat mic



U2: BM83 #2 AT firmware (Embedded) — A2DP source to Shokz OpenRun

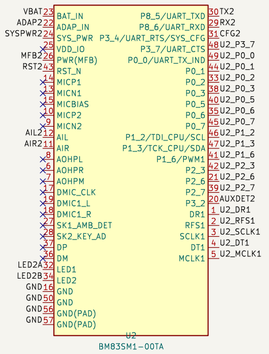

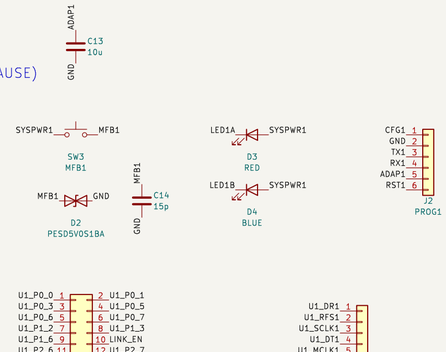

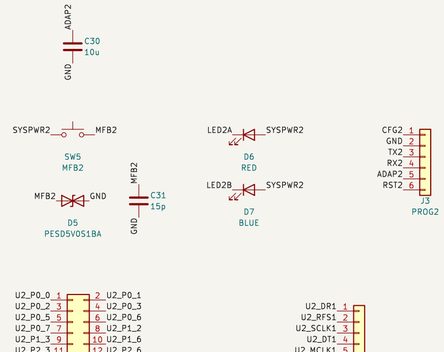

Values marked 仮/要確認 in BOM must be verified before ordering
Generated by hardware/tools/gen_v0.py — edit the script, not this file

Sheet: /
File: bm83_rx_v0.kicad_sch

Title: BM83 throat-mic BT receiver — dev board v0

Size: A2	Date: 2026-11-01	**Rev: v0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1