## JWB-001 README.PDF

Please refer to fabrication drawing for all specifications and fabrication details.

Quantity: 10

Delivery: Standard Shipping address:

Jewelbots

50 Eldridge St.

5<sup>th</sup> floor

New York, NY 10002

Design contacts: Sangeet Dandona

Mobile: (909) 282-2819

Scott Davison

Mobile: (215) 316-2509

Part Number----: JWB-001

Revision----: 3.7

Board size----: 0.94488" x 0.94488"

## Layer Stackup:

|                |                   |                 | Thickness | Dielectric    | Dielectric |
|----------------|-------------------|-----------------|-----------|---------------|------------|
| Layer Name     | Туре              | Material        | (mil)     | Material      | Constant   |
| Top Overlay    | Overlay<br>Solder |                 |           |               |            |
| Top Solder     | Mask/Coverlay     | SurfaceMaterial | 0.4       | Solder Resist | 3.5        |
| Тор            | Signal            | Copper          | 1.4       |               |            |
| Core 1         | Dielectric        | Prepreg         | 6         | 370HR         | 4.02       |
| Layer 2        | Signal            | Copper          | 0.7       |               |            |
| Core 2         | Dielectric        | Core            | 19        | 370HR         | 4.02       |
| Layer 3        | Signal            | Copper          | 0.7       |               |            |
| Core 3         | Dielectric        | Prepreg         | 6         | 370HR         | 4.02       |
| Bottom         | Signal<br>Solder  | Copper          | 1.4       |               |            |
| Bottom Solder  | Mask/Coverlay     | SurfaceMaterial | 0.4       | Solder Resist | 3.5        |
| Bottom Overlay | Overlay           |                 |           |               |            |

Request Impedance Control on the following nets:

Differntial Nets:

ANT1 (Val: 100ohms)

Coord: (138, 236) in mil

ANT2 (Val: 100ohms)

Coord: (138, 221) in mil

 $Zo\_diff = 50ohms$ 

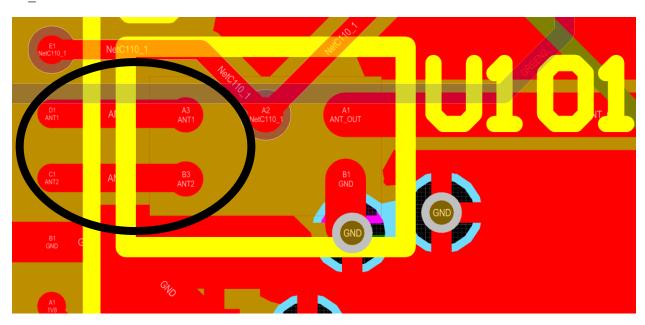


Fig. 1: Diff-pair route

## Single Nets:

ANT\_OUT (Val: 50ohms)
Coord: (344, 216) in mil

ANT\_MATCH (Val: 50ohms) Coord: (380, 125) in mil

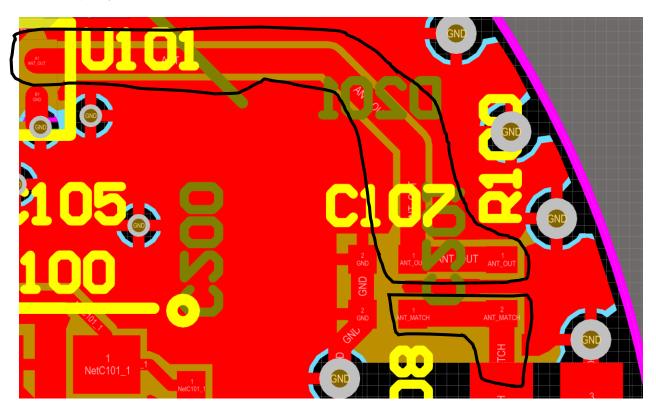


Fig. 2: Single 50ohm traces