01/10/26

PRACTICAL - 10

(a) Aim:

To design and configure a simple internetwork using a router in CISCO packet tracer and test connectivity between two PC's.

Procedure:

Step 1:

Configure router 1

* Select the router and open CLI
* Press enter to start configuring router 1
* Type enable to activate the privileged mode.

Step 2:

* Assign IP address to every PC in the network.
* Select the PC, Go to desktop and select IP configuration and assign IP address. Default gateway, subnet mask.
* Assign the default gateway of PC's 192.168.10.1
* Assign the default gateway of PC as 192.168.20.1

Step 3:

* Connect fast Ethernet 0 port of PC0 with fast Ethernet 0/0 port of router 1 using a copper straight - through cables.
* Connect fast ethernet 0 port of PC1 with fast ethernet 0 port of PC1 with fast Ethernet 0/1 port of router 1 using a copper straight through cable.


(b) Aim:

To design and configure an internetwork using a wireless router, DHCP server and internet cloud in cisco packet tracer


Procedure:

* Open Cisco Packet tracer and create the required network topology.
* Connect PC, laptop, wireless router, cable modem, Internet cloud & server
* Configure the wireless router with SSID homenetwork and enable DHCP.
* Connect the laptop to the wireless network and setup PC to DHCP.
* Configure the server with IP 208.67.220.22 and enable DHCP and DNS.
* Verify connectivity using ipconfig and ping cisco.com.

(a)

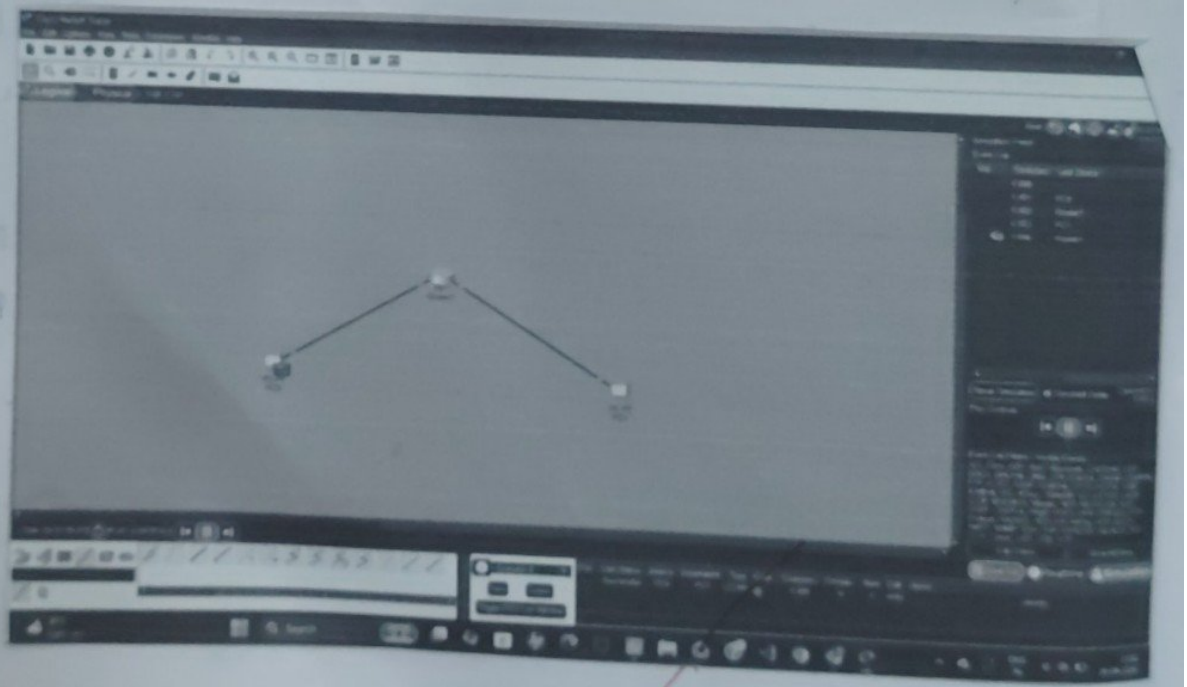

(b)

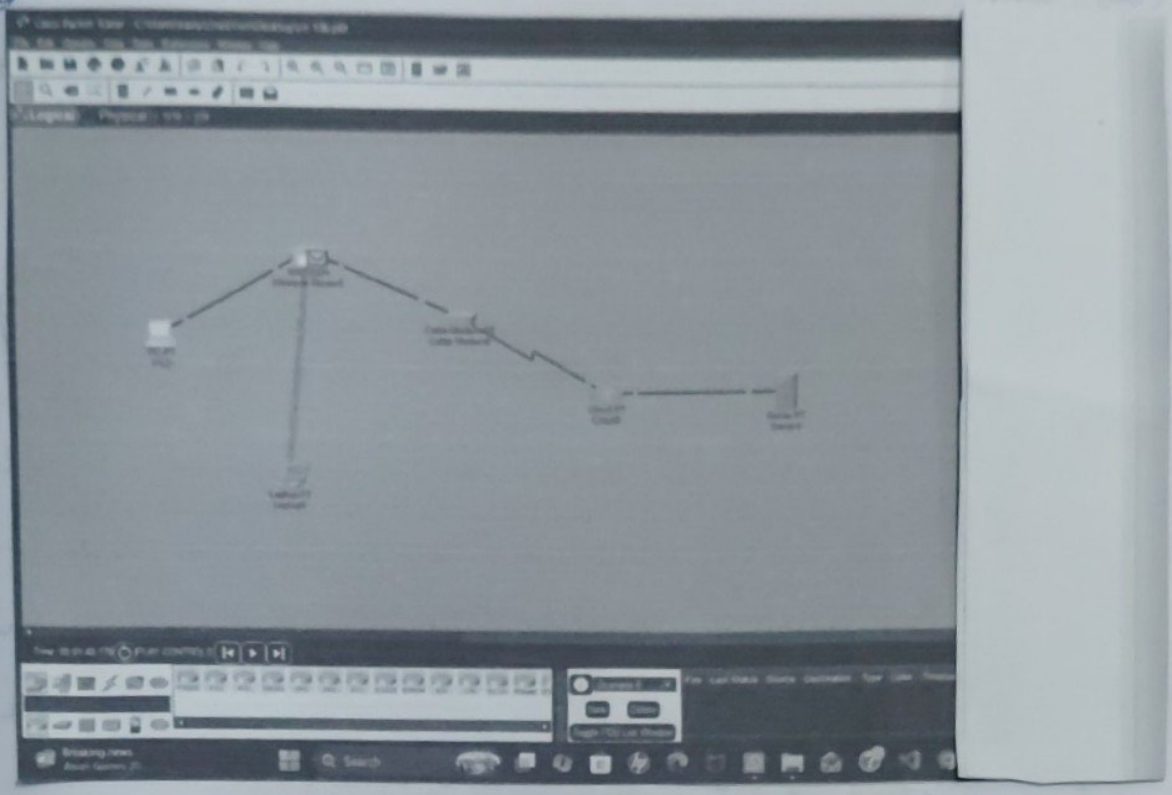

Result:

The internetwork was successfully designed & configured using a wireless router, DHCP server and Internet cloud & connectivity was successfully verified using ping cisco.com.