4/10/26


PRACTICAL - 11


(a) Aim:


To simulate a static routing configuration using cisco packet tracer.


Procedure:


* Open cisco packet tracer and create the given network topology.
* Connect 3 routers and PC's using suitable cable
* Configure IP address for routers and PC's
* Enable all routers interface using no shutdown
* Configure static routes on Route 0, route 1, route 2 using ip mobile.
* Set main and backup routes using different administrative distance values
* Test connectivity
* Use tracer to verify the routing path.
* Disconnect the main link and verify that the backup router works.
* Thus a static routing is successfully configured and verified.

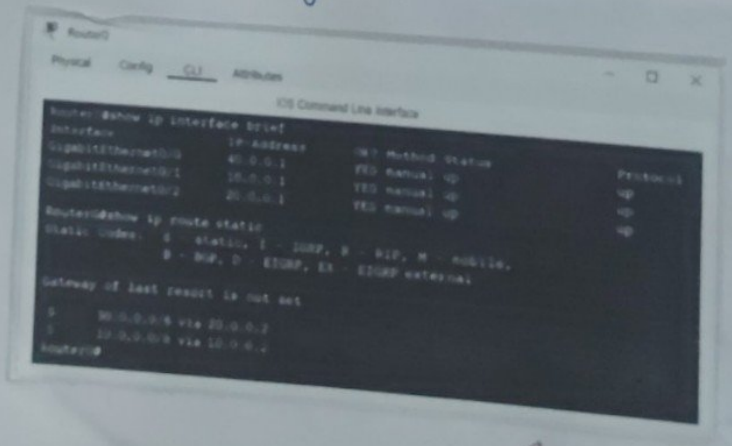


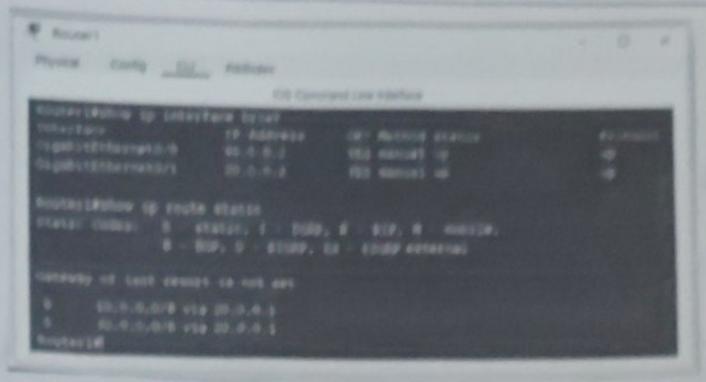


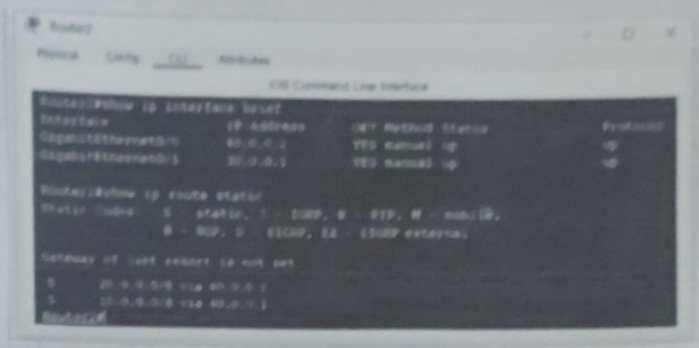

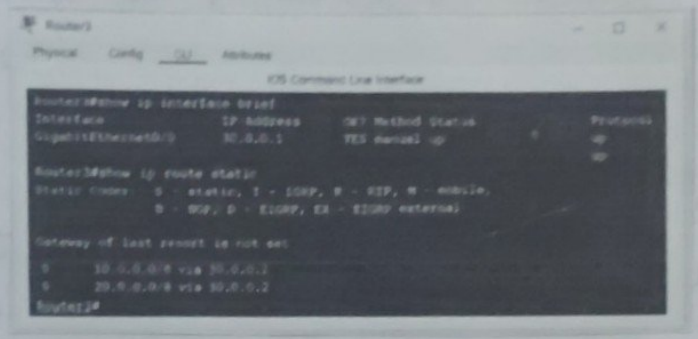

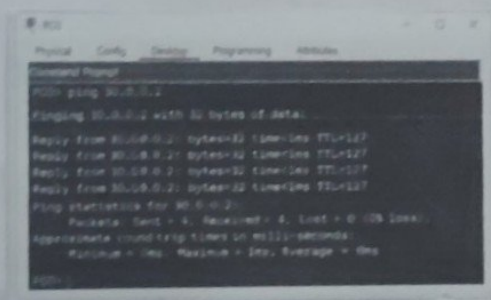

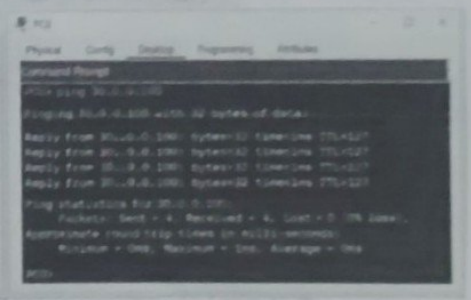

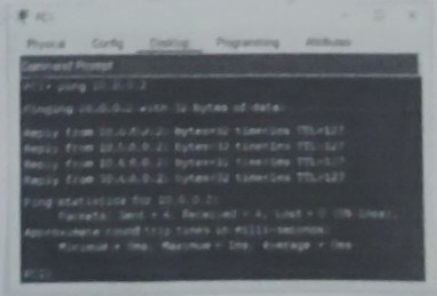



(b) Aim:

To simulate RIP using (3 routers & 2 PC's) Cisco packet tracer.

Procedure:

* Create the topology with 3 routers & 2 PC's
* connect the device using suitable cables
* Assign the given IP address to both PC's.
* Configure fast ethernet & serial interface of all routers.
* Enable interface using no shutdown.
* Set clock rate & 4000 and bandwidth b/w on DE serial interface.
* Enable RIP on all routers using router RIP.
* Add directly connected network using the network command.
* Test connectivity using ping 20.0.0.2
* Use tracer to 20.0.0.2 to verify the selected route.
* Disconnect the direct router 0, router 2 link and use tracert again to verify RIP selects the alternate route.

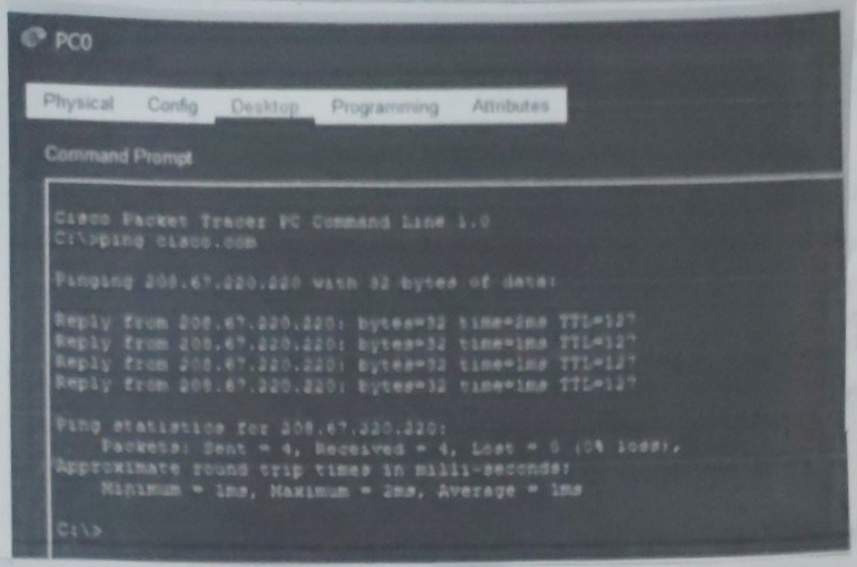

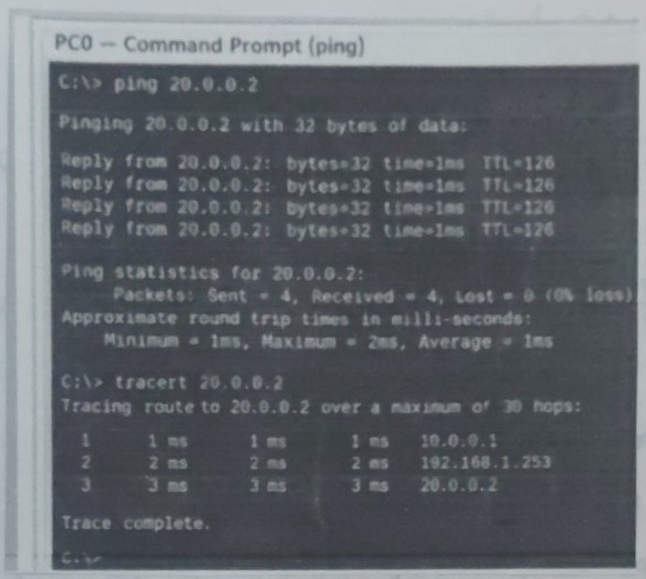

Result:

The RIP was and static routing was successfully configured and stimulated using cisco Packet tracer.