28/9/26

PRACTICAL - 9

Aim:

To implement the subnetting in cisco packet tracer simulator.

Procedure:

i) Open cisco Packet Tracer and create a new network topology.

ii) Add the required routers, switches and PCs to workspace

iii) connect the device using appropriate copper cables.

iv) Use the network 192.168.1.0/24 and divide into /27 network.

v) Configure the router interfaces with the required IP address and subnet mask 255.255.255.224

vi) Use enable and config terminal in the router CLI

vii) Enter the interface configuration terminal and assign IP using

i) Ip address <IP address> 255.255.255.224


ii) No shutdown.

viii) Configure the required switch port in access mode.

ix) Assign each PC its IP address, subnet mask and default gateway.

x) Repeat the configuration as required subnet

xi) Use the ping command to test connectivity b/w PC's and the router.

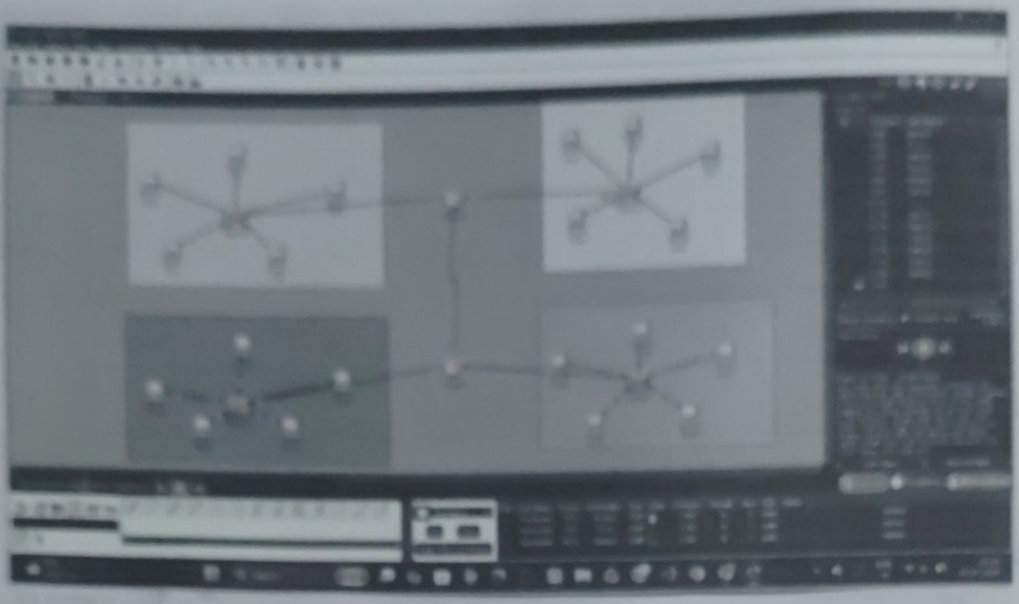

CLI command:

enable
configure terminal
Interface FastEthernet 0/0
Ip address 198.168.1.10 255.255.255.0
no shutdown
exit.

Result:

Thus the Implementation of subnetting in Cisco packet tracer Simulator was executed successfully.