


A- Clearance hole for M6 hex head socket screw with countersink so that head is fully recessed

B - 11 mm diameter Clearance hole for M6 hex head socket screw and head

C - M4 x 0.7 tapped hole, min depth (hole and threads) 10 mm, max depth thru

D - M3 x 0.5 tapped hole, min depth (hole and threads) 10 mm, max depth thru

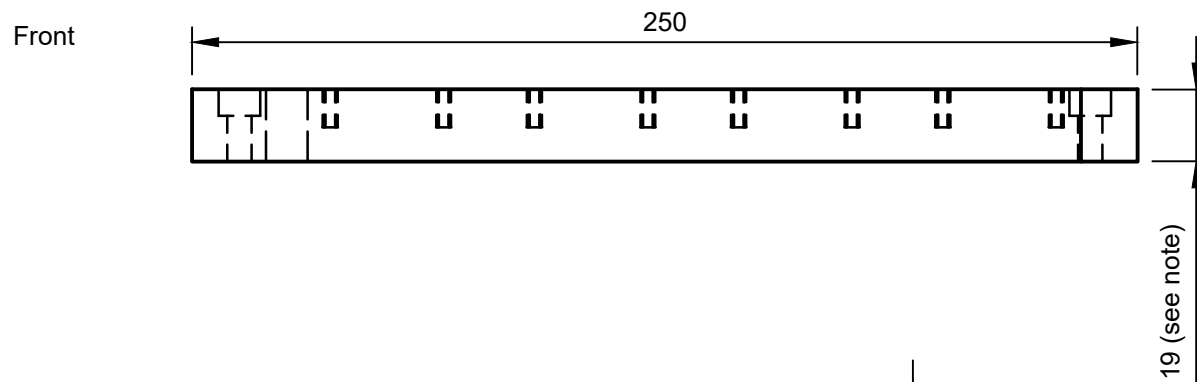

Heat Sink Block

Qty : 1

Material - Aluminum

All dimensions mm

Note : Thickness of this part plus Heat Sink Spacer 19.8 \pm 0.2 mm. Can be single piece or two pieces.

Tolerances if not indicated:

All hole positions to 0.5 mm

Length, width to 3 mm

Top flat to 0.1 mm over length of part