力学与航空航天工程系
DEPARTMENT OF MECHANICS AND AEROSPACE ENGINEERING

Deadline: 23:00pm of next Monday (2022/03/28)
Please send your homework into TA's mailbox: 12132430@mail.sustech.edu.cn.

MECHANICS OF MATERIALS

YAHUI XUE (薛亚辉)

SPRING, 2022

Homework-V

Problem 1

and 4.2 Knowing that the couple shown acts in a vertical plane, determine the stress at (*a*) point *A*, (*b*) point *B*.

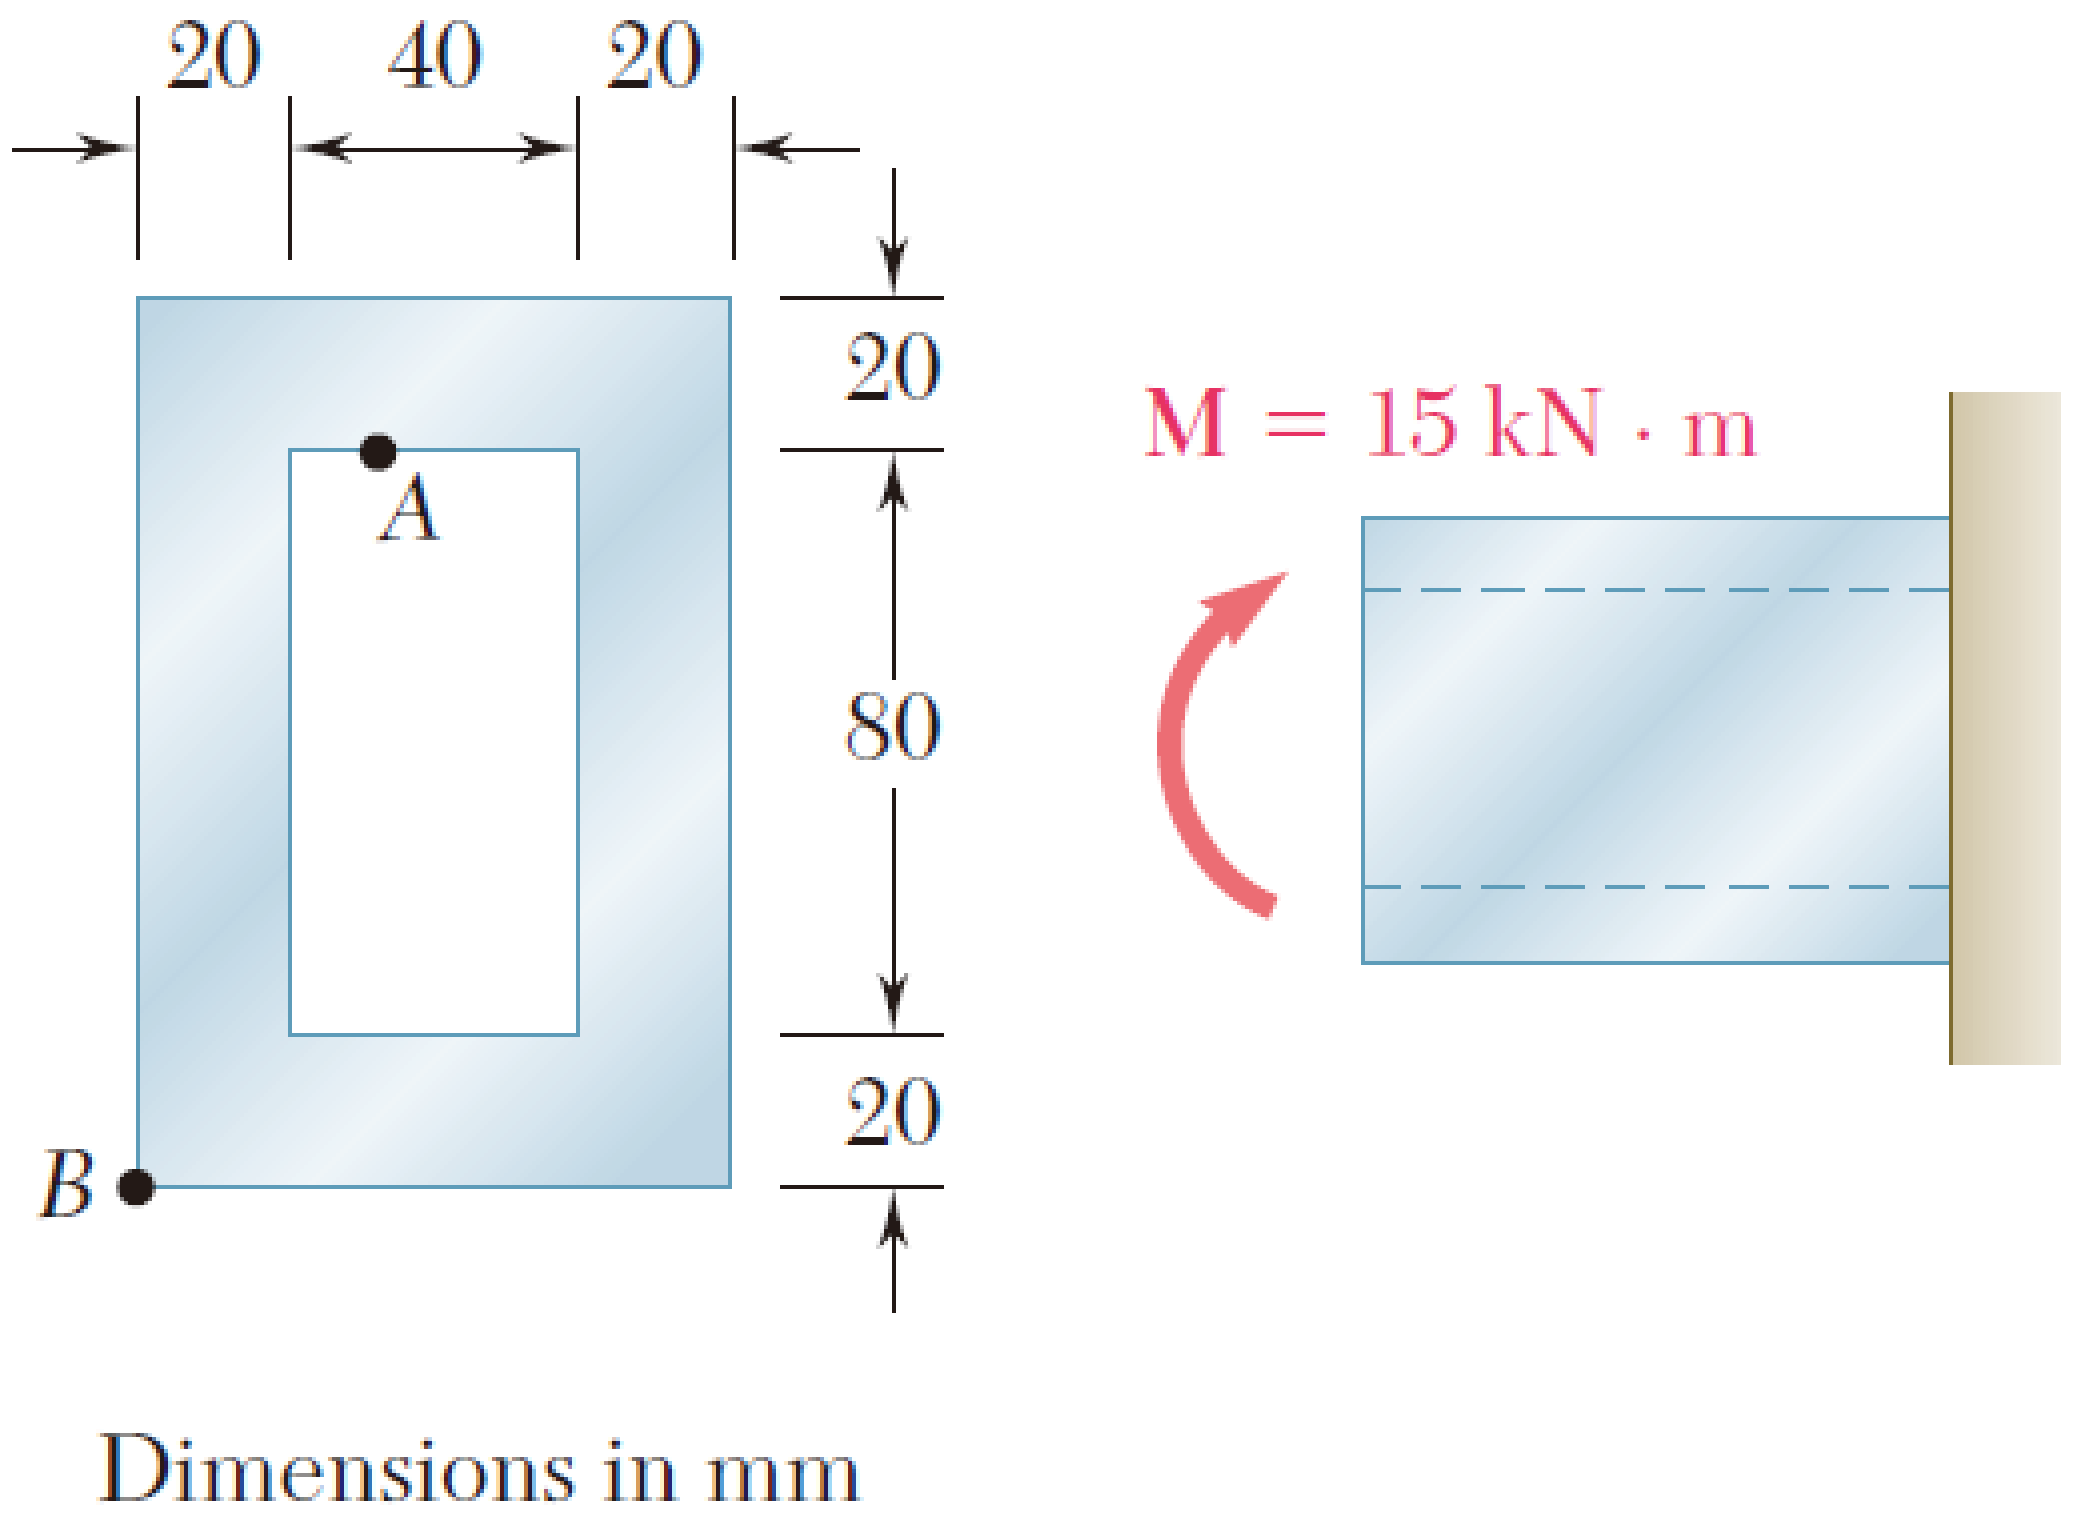

Fig. P4.2

Homework-V

Problem 2

4.4 A nylon spacing bar has the cross section shown. Knowing that the allowable stress for the grade of nylon used is 24 MPa, determine the largest couple $\mathbf{M}_z$ that can be applied to the bar.

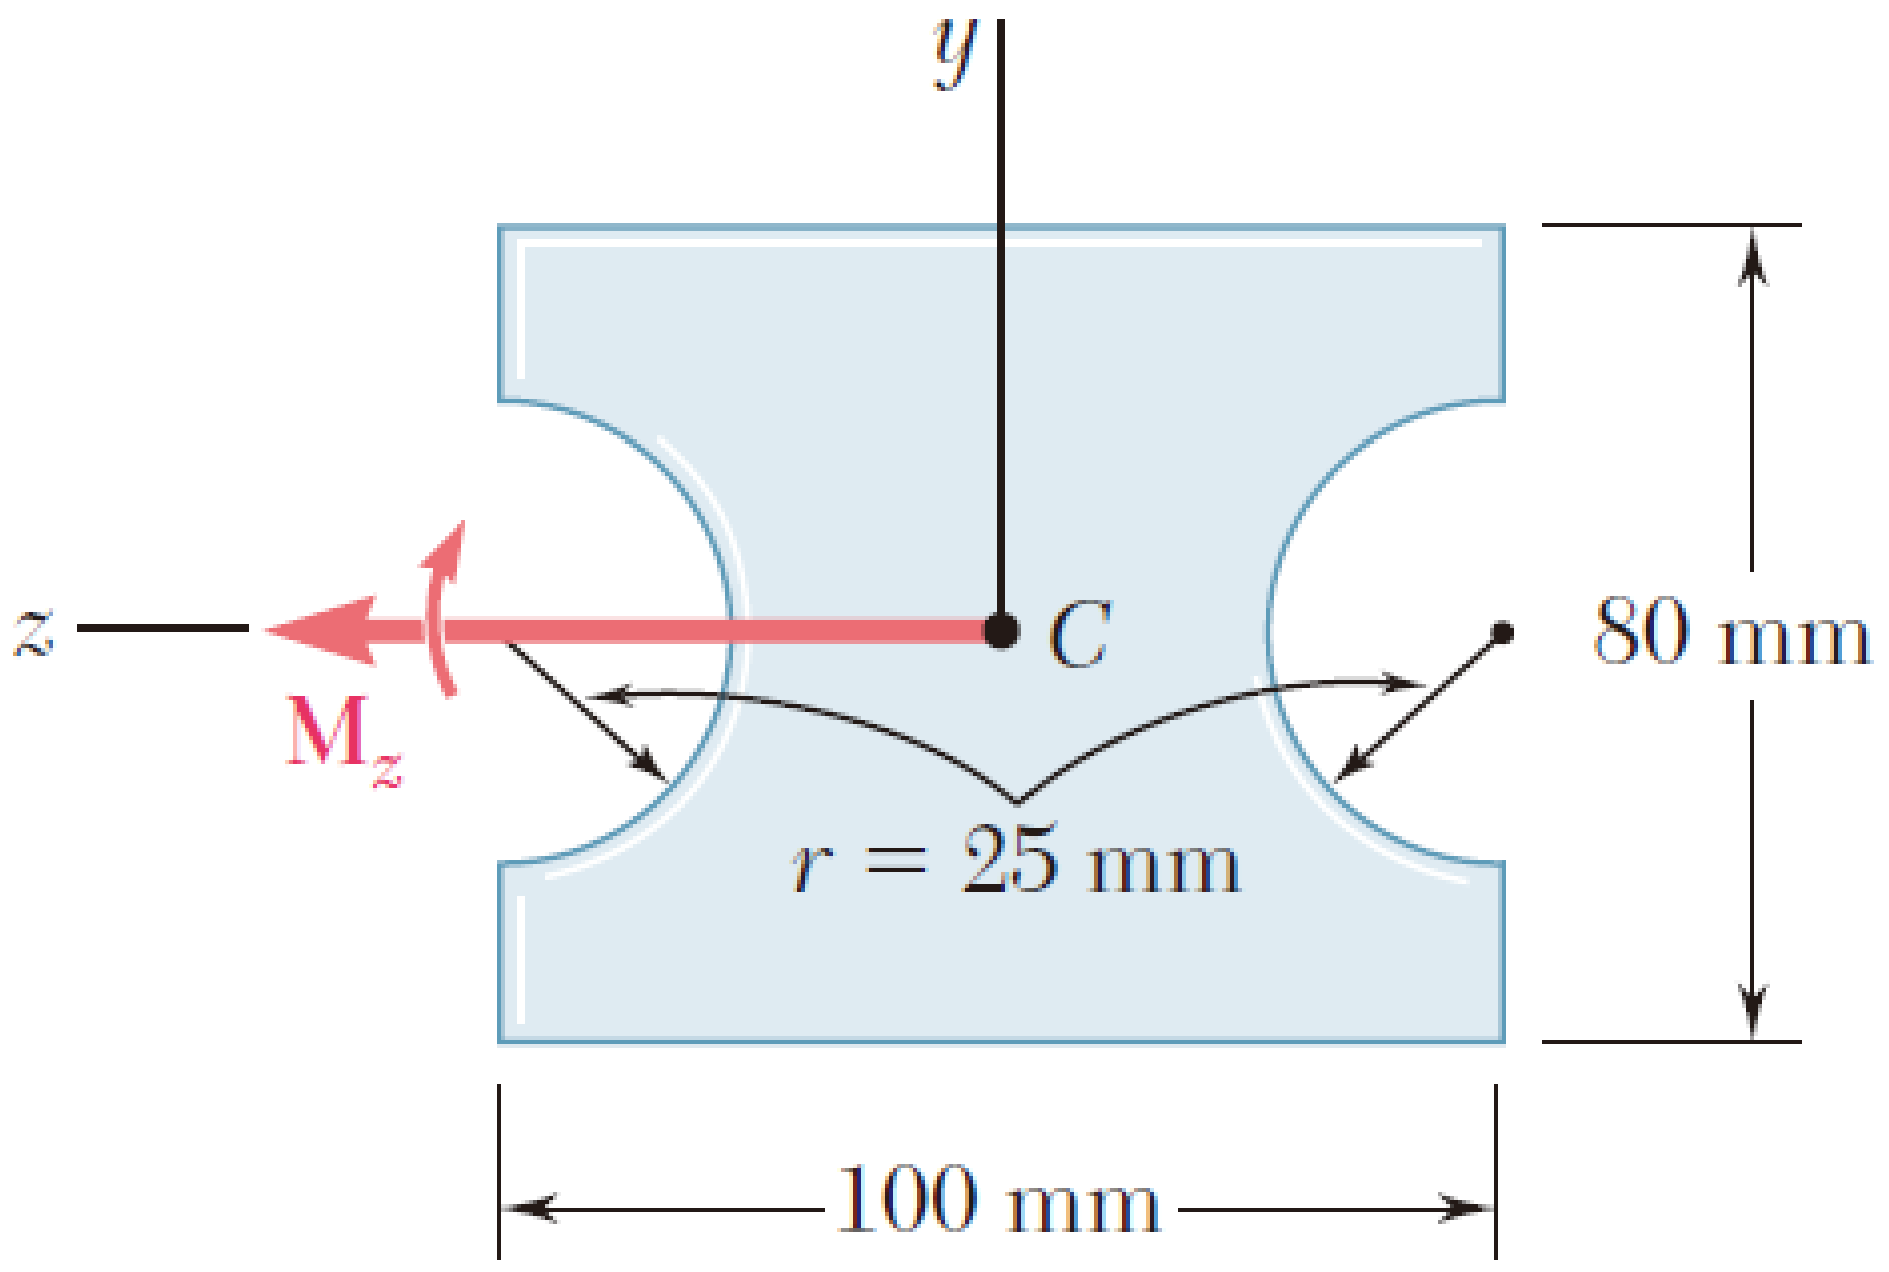

Fig. P4.4

Homework-V

Problem 3

4.15 The beam shown is made of a nylon for which the allowable stress is 24 MPa in tension and 30 MPa in compression. Determine the largest couple **M** that can be applied to the beam.

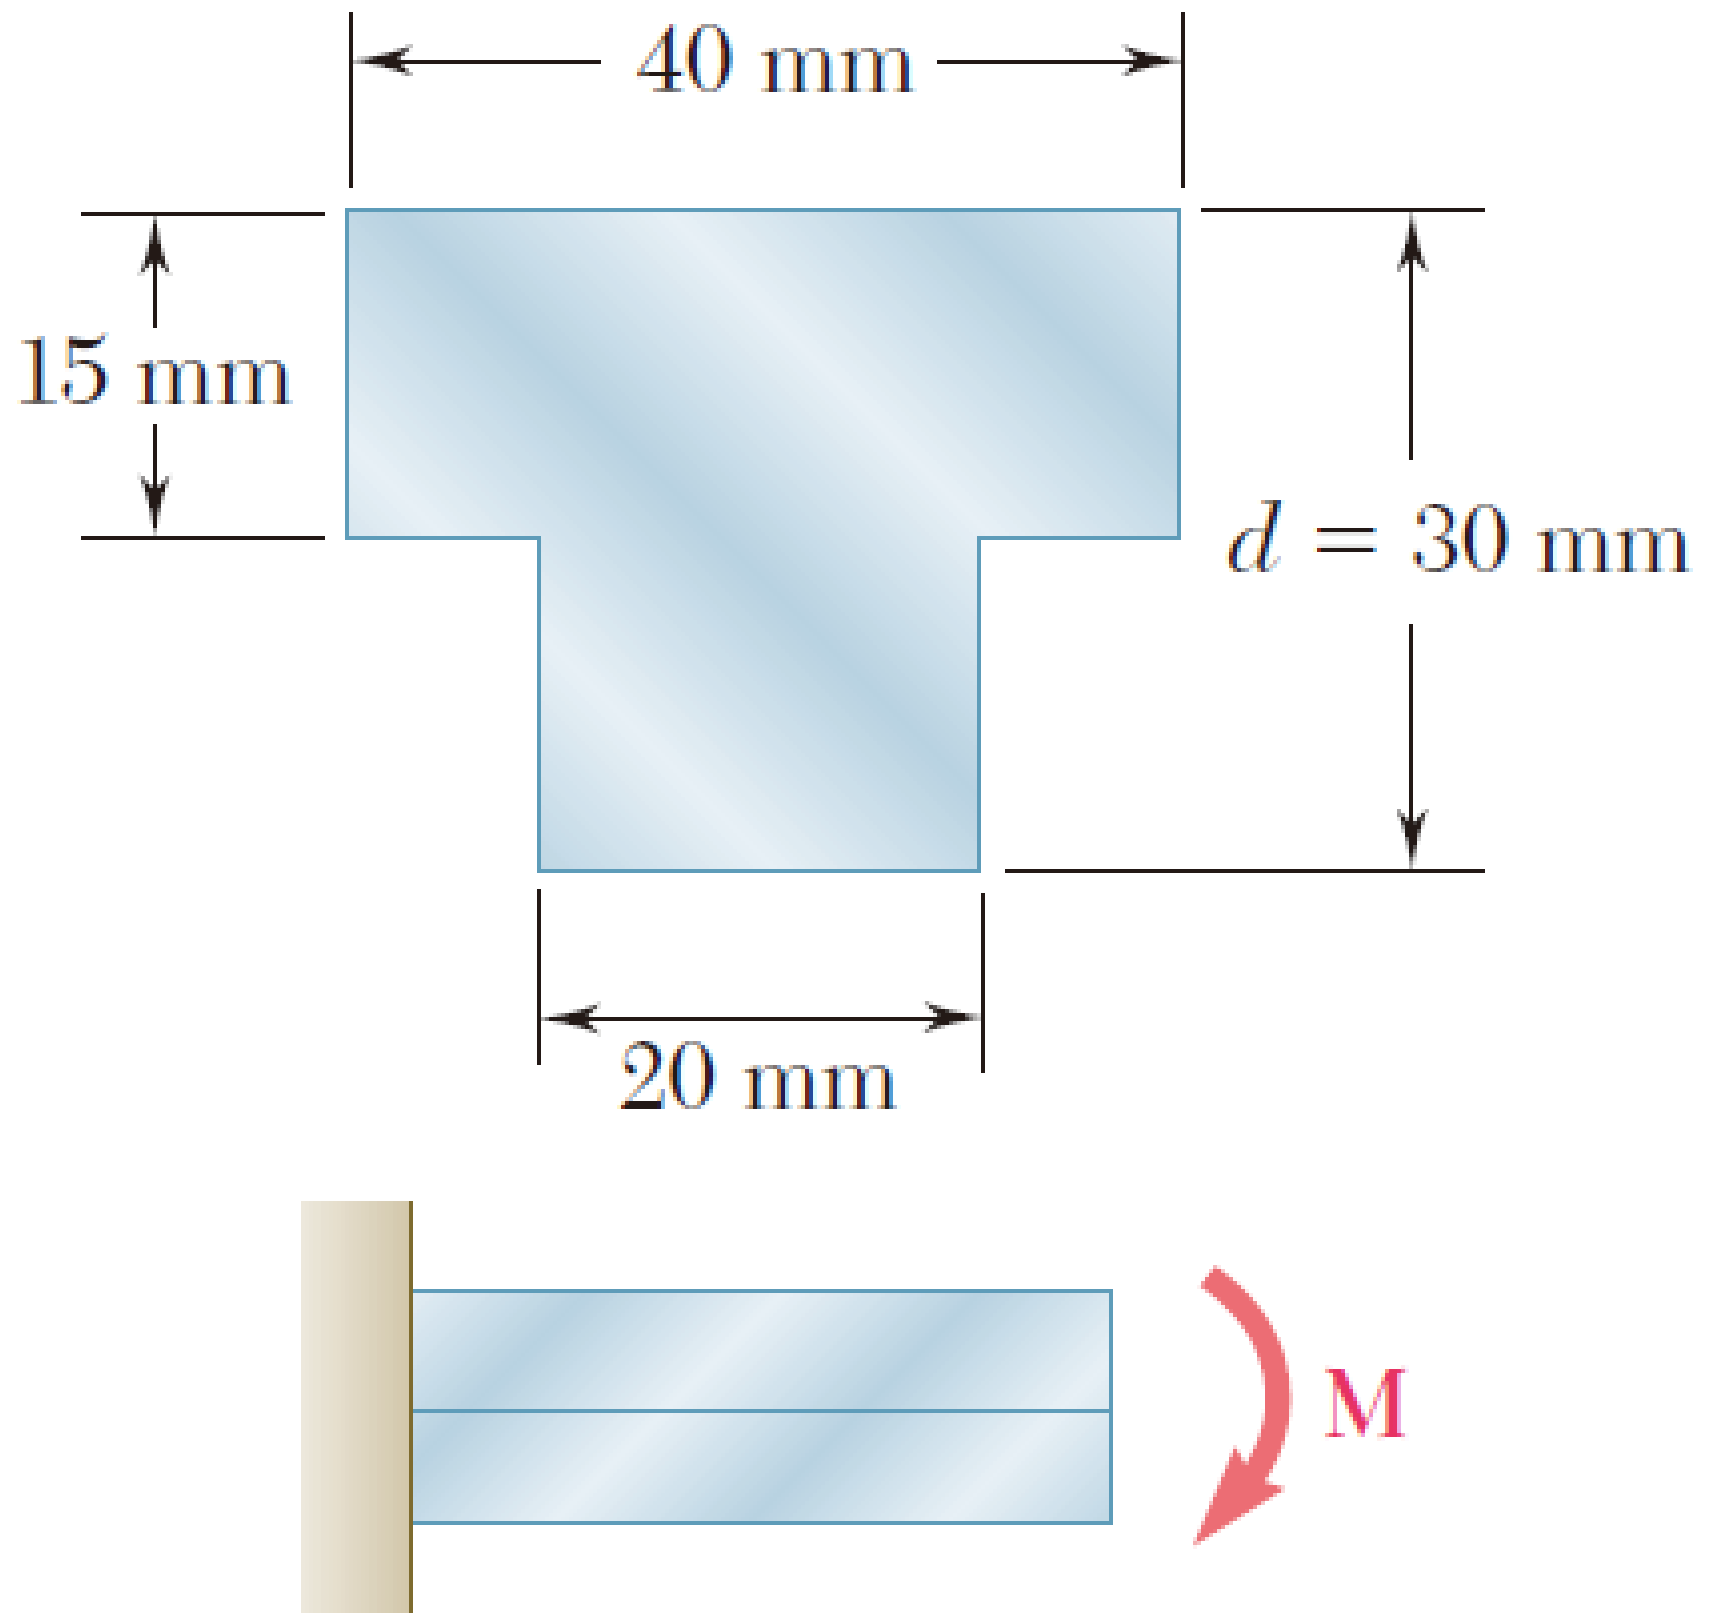

Fig. P4.15

Homework-V

Problem 4

4.122 An eccentric force **P** is applied as shown to a steel bar of 25 × 90-mm cross section. The strains at A and B have been measured and found to be

$$\epsilon_A = +350\ \mu \qquad \epsilon_B = -70\ \mu$$

Knowing that E = 200 GPa, determine (*a*) the distance d, (*b*) the magnitude of the force **P**.

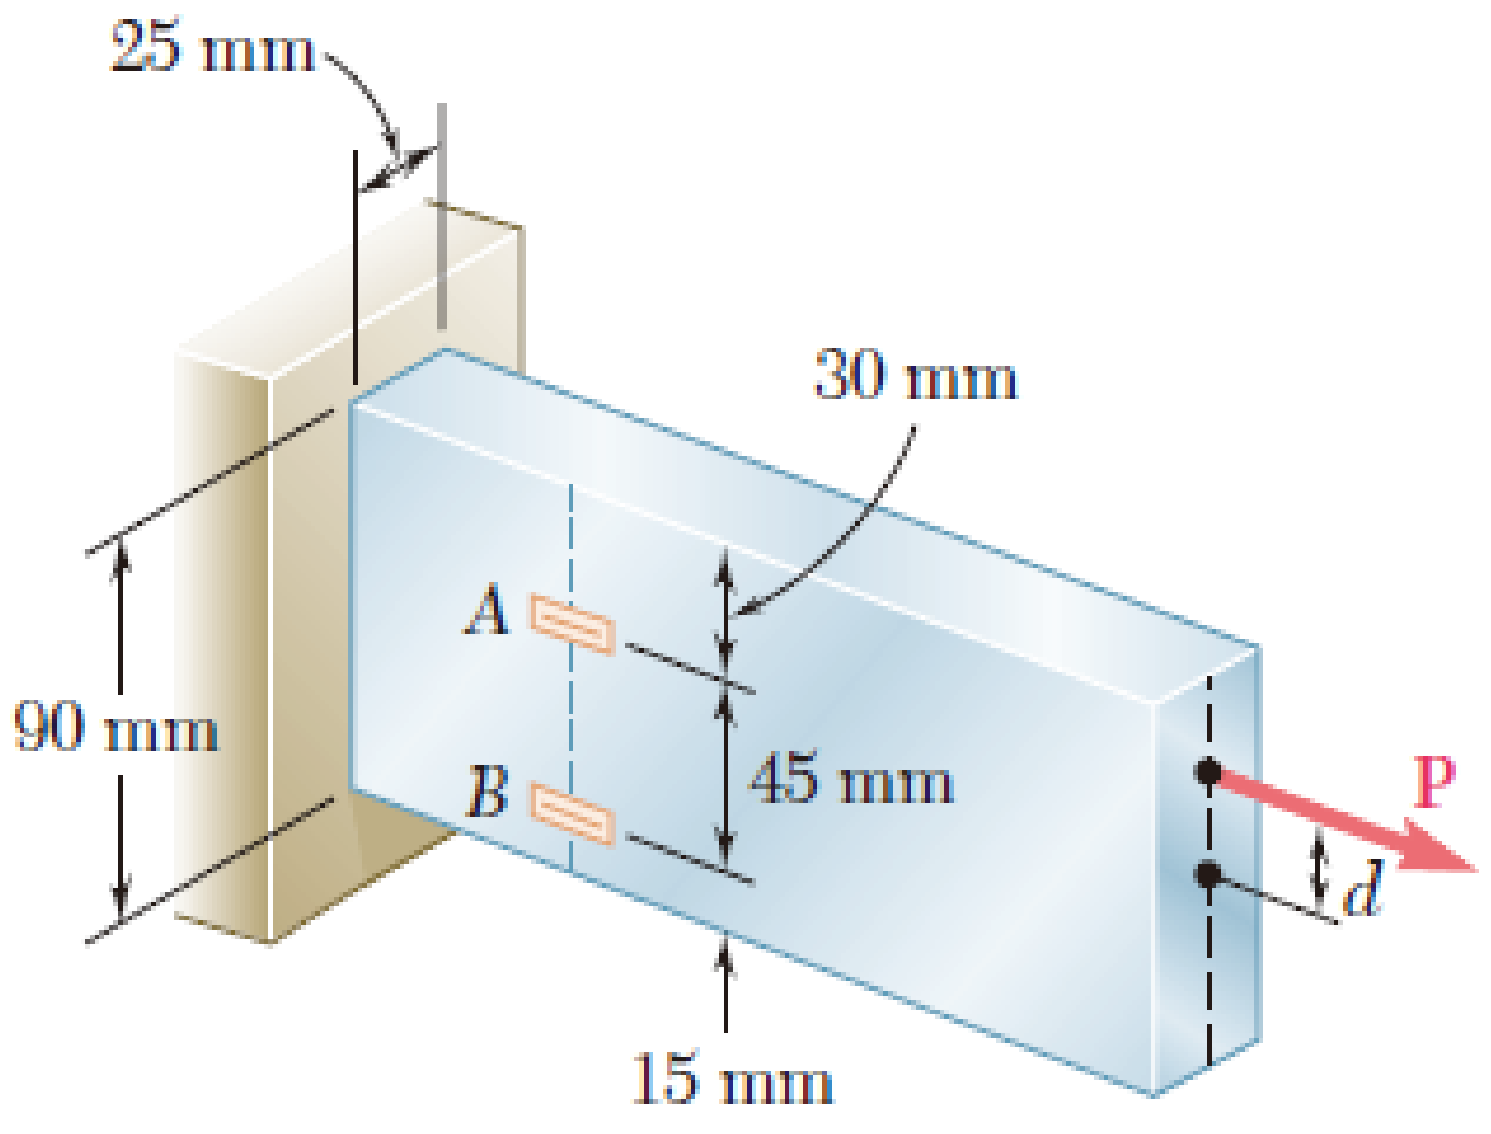

Fig. P4.122

Average Mechanical Properties of Typical Engineering Materials[a]

(SI Units)

Materials		Density ρ (Mg/m^3)	Moduls of Elasticity E (GPa)	Modulus of Rigidity G (GPa)	Yield Strength (MPa) σ_Y Tens.	Comp.[b]	Shear	Ultimate Strength (MPa) σ_u Tens.	Comp.[b]	Shear	% Elongation in 50 mm specimen	Poisson's Ratio ν	Coef. of Therm. Expansion α $(10^{-6})/°C$
Metallic													
Aluminum Wrought Alloys	2014-T6	2.79	73.1	27	414	414	172	469	469	290	10	0.35	23
	6061-T6	2.71	68.9	26	255	255	131	290	290	186	12	0.35	24
Cast Iron Alloys	Gray ASTM 20	7.19	67.0	27	–	–	–	179	669	–	0.6	0.28	12
	Malleable ASTM A-197	7.28	172	68	–	–	–	276	572	–	5	0.28	12
Copper Alloys	Red Brass C83400	8.74	101	37	70.0	70.0	–	241	241	–	35	0.35	18
	Bronze C86100	8.83	103	38	345	345	–	655	655	–	20	0.34	17
Magnesium Alloy	[Am 1004-T61]	1.83	44.7	18	152	152	–	276	276	152	1	0.30	26
Steel Alloys	Structural A-36	7.85	200	75	250	250	–	400	400	–	30	0.32	12
	Structural A992	7.85	200	75	345	345	–	450	450	–	30	0.32	12
	Stainless 304	7.86	193	75	207	207	–	517	517	–	40	0.27	17
	Tool L2	8.16	200	75	703	703	–	800	800	–	22	0.32	12
Titanium Alloy	[Ti-6Al-4V]	4.43	120	44	924	924	–	1,000	1,000	–	16	0.36	9.4
Nonmetallic													
Concrete	Low Strength	2.38	22.1	–	–	–	12	–	–	–	–	0.15	11
	High Strength	2.37	29.0	–	–	–	38	–	–	–	–	0.15	11
Plastic Reinforced	Kevlar 49	1.45	131	–	–	–	–	717	483	20.3	2.8	0.34	–
	30% Glass	1.45	72.4	–	–	–	–	90	131	–	–	0.34	–
Wood Select Structural Grade	Douglas Fir	0.47	13.1	–	–	–	–	2.1[c]	26[d]	6.2[d]	–	0.29[e]	–
	White Spruce	3.60	9.65	–	–	–	–	2.5[c]	36[d]	6.7[d]	–	0.31[e]	–

[a] Specific values may vary for a particular material due to alloy or mineral composition,mechanical working of the specimen,or heat treatment. For a more exact value reference books for the material should be consulted.

[b] The yield and ultimate strengths for ductile materials can be assumed equal for both tension and compression.

[c] Measured perpendicular to the grain.

[d] Measured parallel to the grain.

[e] Deformation measured perpendicular to the grain when the load is applied along the grain.