力学与航空航天工程系
DEPARTMENT OF MECHANICS AND AEROSPACE ENGINEERING

Deadline: 23:00pm of next Monday (2022/03/14)
Please send your homework into TA's mailbox: 12132430@mail.sustech.edu.cn.

MECHANICS OF MATERIALS

YAHUI XUE (薛亚辉)

SPRING, 2022

Homework-III (6 problems)

Problem 1

10–37. Determine the bulk modulus for each of the following materials: (a) rubber, $E_r = 0.4$ ksi, $\nu_r = 0.48$, and (b) glass, $E_g = 8(10^3)$ ksi, $\nu_g = 0.24$.

Homework-III (6 problems)

Problem 2

2.67 The block shown is made of a magnesium alloy for which $E = 45$ GPa and $\nu = 0.35$. Knowing that $\sigma_x = -180$ MPa, determine (*a*) the magnitude of σ_y for which the change in the height of the block will be zero, (*b*) the corresponding change in the area of the face *ABCD*, (*c*) the corresponding change in the volume of the block.

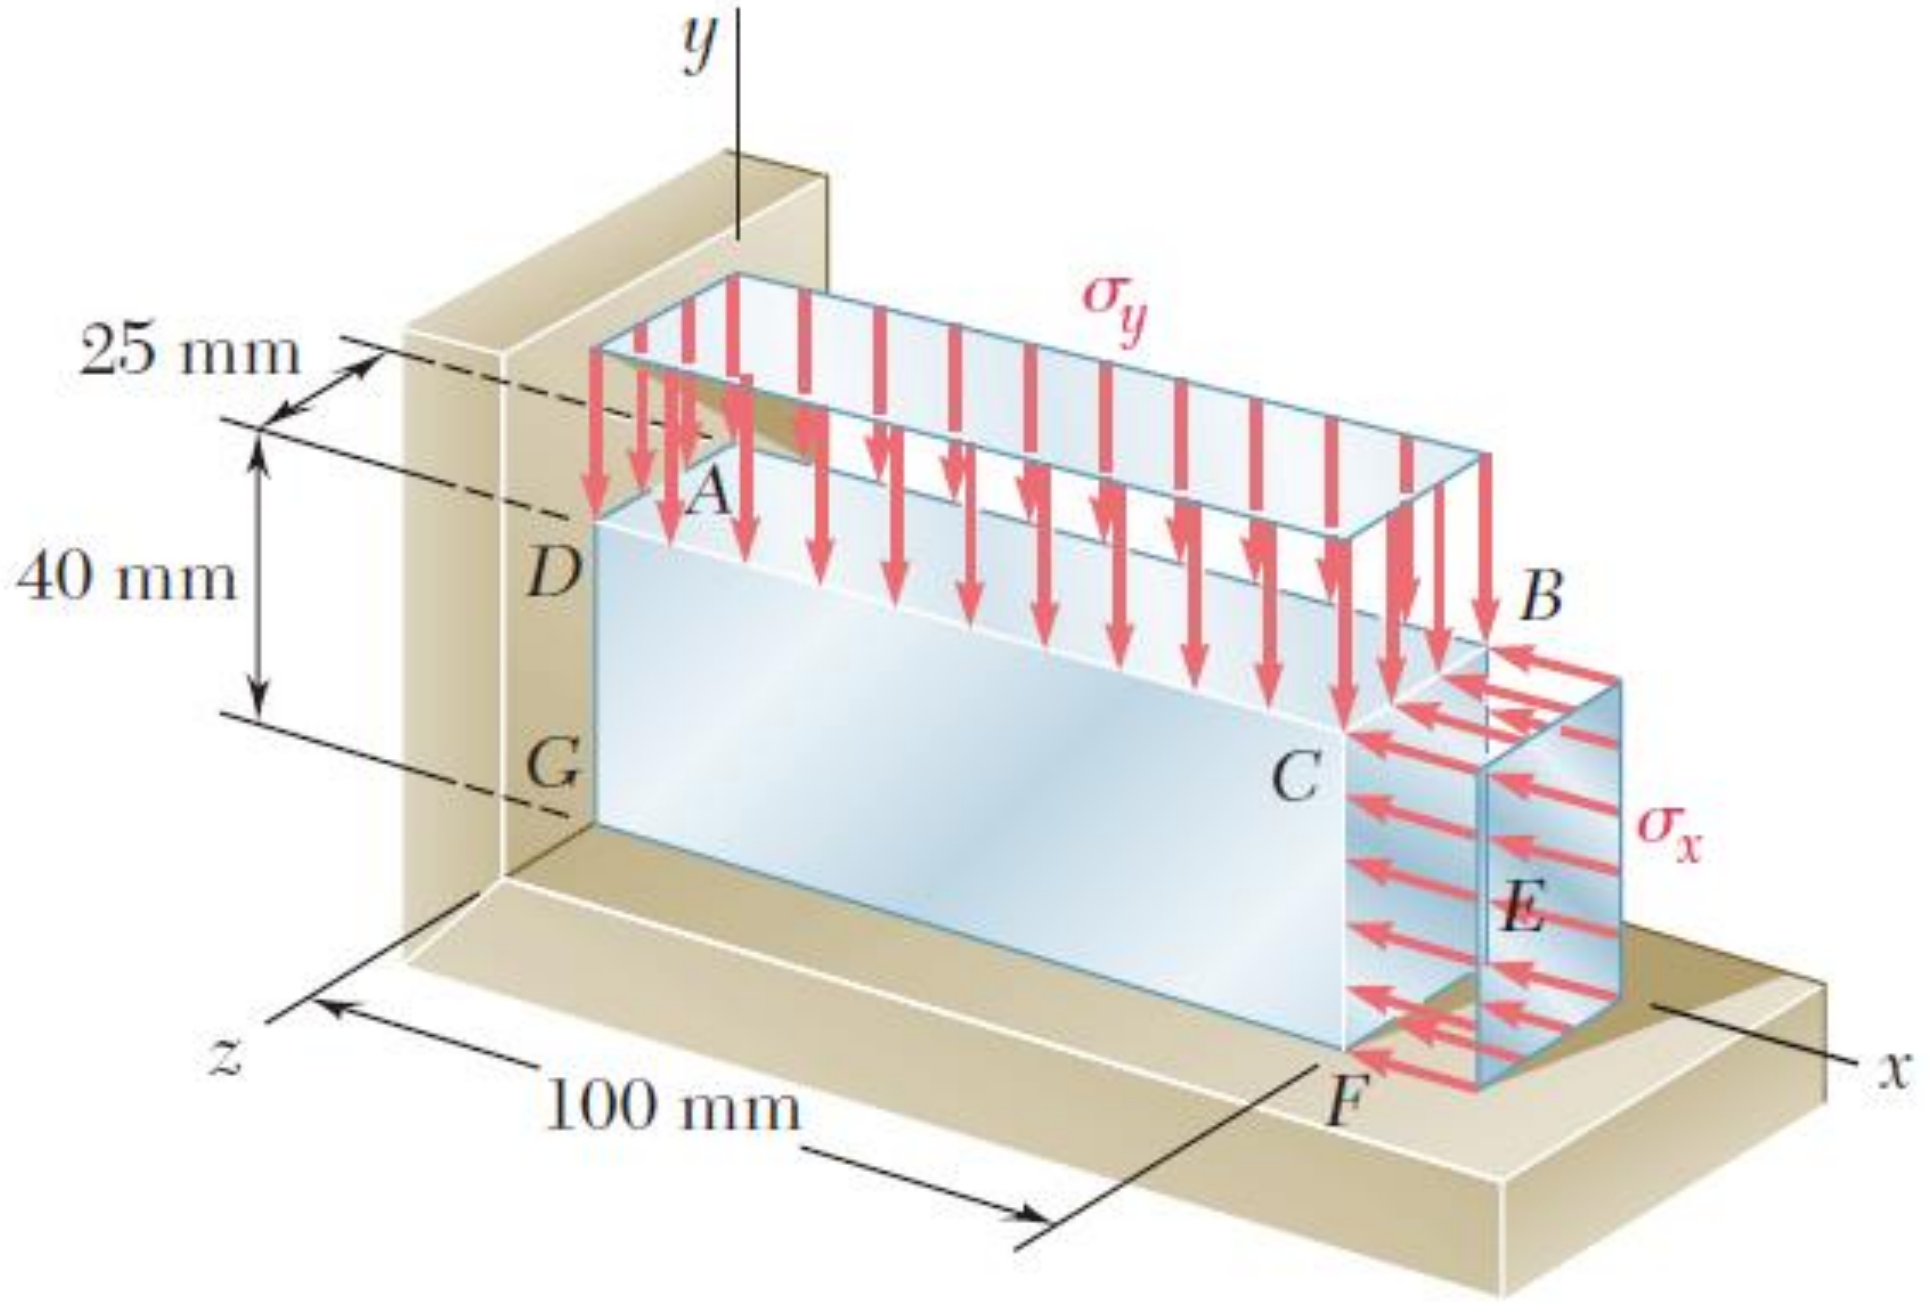

Fig. P2.67

Homework-II (6 problems)

Problem 3

1–66. Determine the largest load **P** that can be applied to the frame without causing either the average normal stress or the average shear stress at section *a–a* to exceed $\sigma = 150$ MPa and $\tau = 60$ MPa, respectively. Member *CB* has a square cross section of 25 mm on each side.

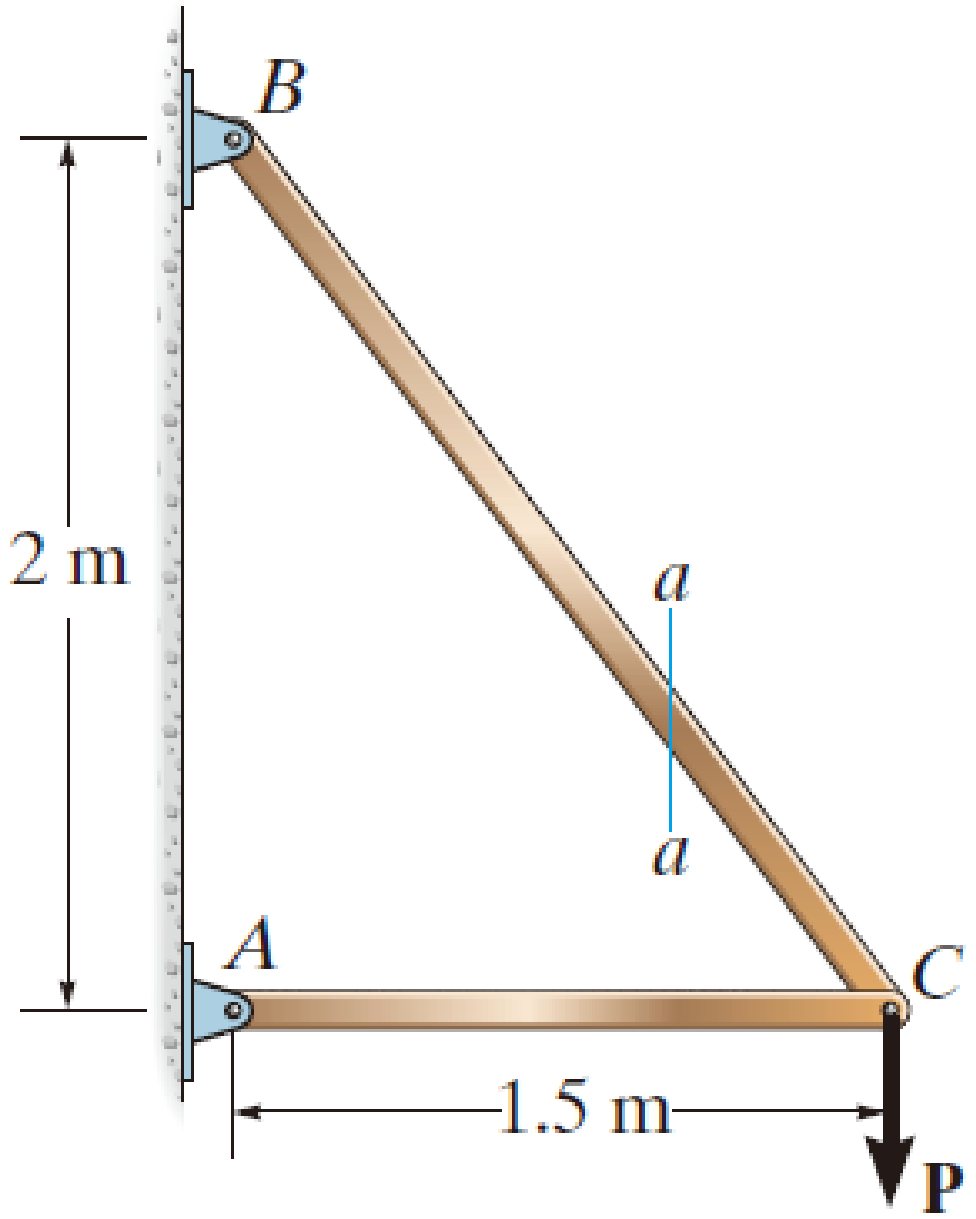

Prob. 1–66

Homework-II (6

Problem 4

3–34. A shear spring is made from two blocks of rubber, each having a height h, width b, and thickness a. The blocks are bonded to three plates as shown. If the plates are rigid and the shear modulus of the rubber is G, determine the displacement of plate A when the vertical load $\mathbf{P}$ is applied. Assume that the displacement is small so that $\delta = a \tan \gamma \approx a\gamma$.

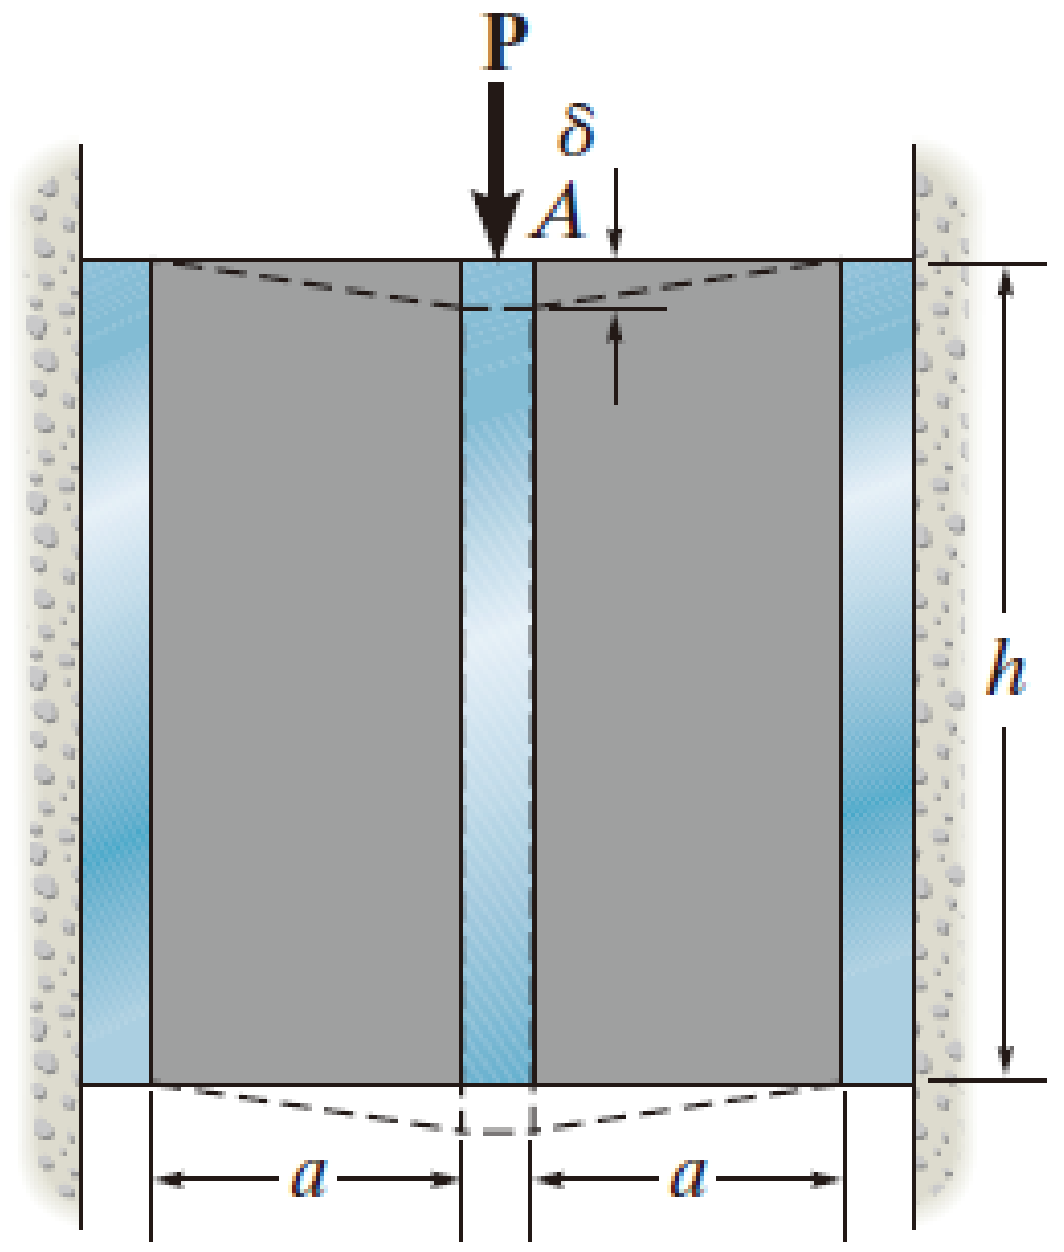

Prob. 3–34

Homework-II (6 problems)

Problem 5

3–33. The shear stress–strain diagram for an alloy is shown in the figure. If a bolt having a diameter of 0.25 in. is made of this material and used in the lap joint, determine the modulus of elasticity E and the force P required to cause the material to yield. Take $\nu = 0.3$.

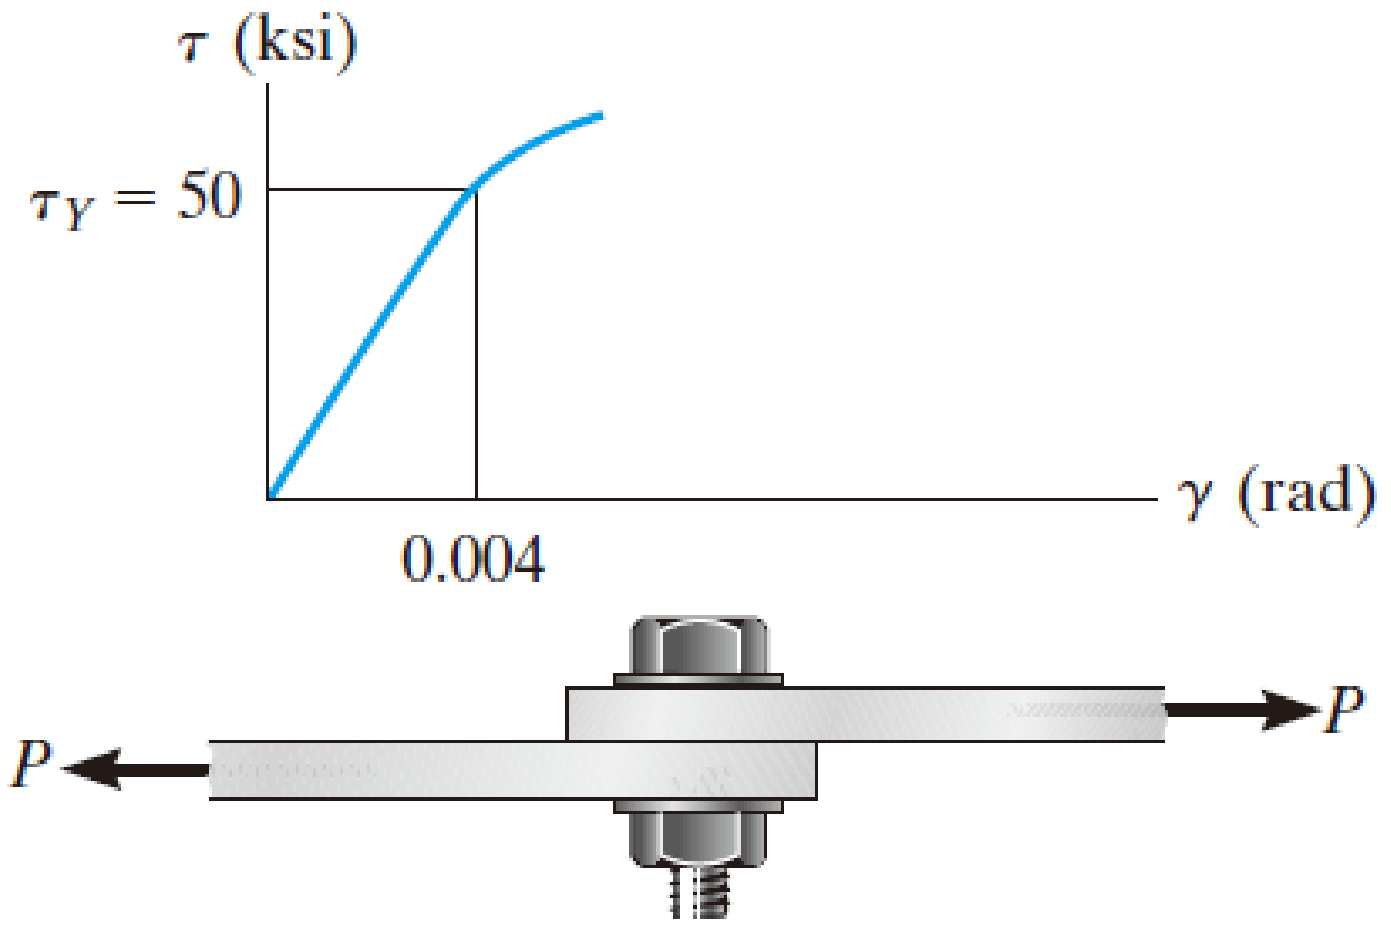

Prob. 3–33

Homework-II (6 problems)

Problem 6

3–29. The brake pads for a bicycle tire are made of rubber. If a frictional force of 50 N is applied to each side of the tires, determine the average shear strain in the rubber. Each pad has cross-sectional dimensions of 20 mm and 50 mm. $G_r = 0.20$ MPa.

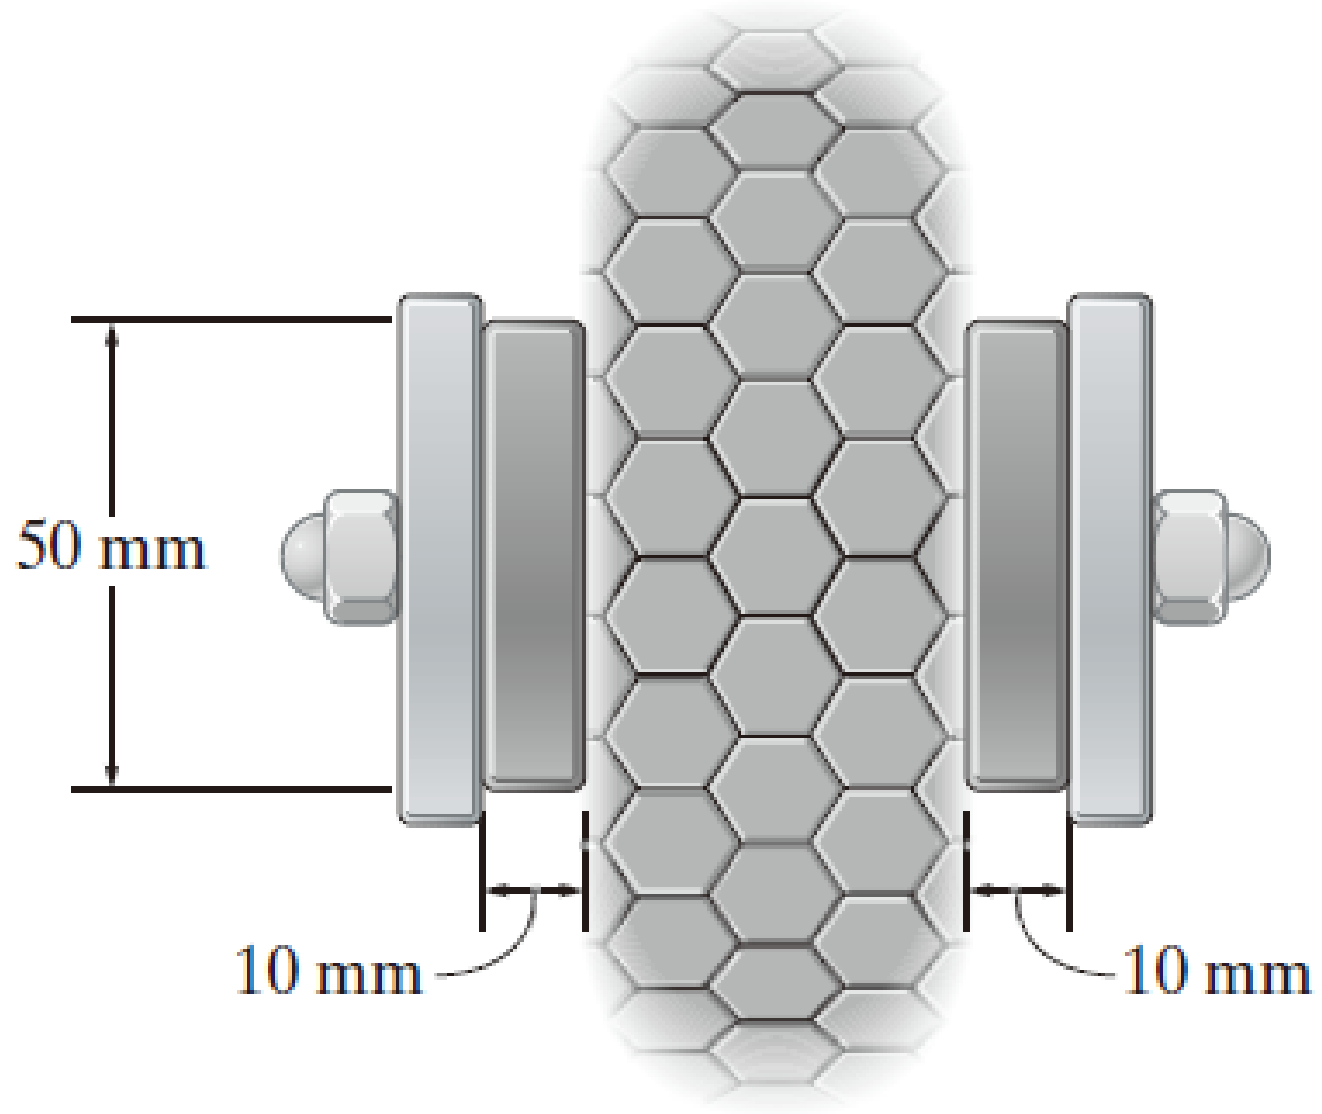

Prob. 3–29

Average Mechanical Properties of Typical Engineering Materials[a]

(SI Units)

Materials		Density ρ (Mg/m^3)	Moduls of Elasticity E (GPa)	Modulus of Rigidity G (GPa)	Yield Strength (MPa) σ_Y Tens.	Comp.[b]	Shear	Ultimate Strength (MPa) σ_u Tens.	Comp.[b]	Shear	% Elongation in 50 mm specimen	Poisson's Ratio ν	Coef. of Therm. Expansion α $(10^{-6})/°C$
Metallic													
Aluminum Wrought Alloys	2014-T6	2.79	73.1	27	414	414	172	469	469	290	10	0.35	23
	6061-T6	2.71	68.9	26	255	255	131	290	290	186	12	0.35	24
Cast Iron Alloys	Gray ASTM 20	7.19	67.0	27	–	–	–	179	669	–	0.6	0.28	12
	Malleable ASTM A-197	7.28	172	68	–	–	–	276	572	–	5	0.28	12
Copper Alloys	Red Brass C83400	8.74	101	37	70.0	70.0	–	241	241	–	35	0.35	18
	Bronze C86100	8.83	103	38	345	345	–	655	655	–	20	0.34	17
Magnesium Alloy	[Am 1004-T61]	1.83	44.7	18	152	152	–	276	276	152	1	0.30	26
Steel Alloys	Structural A-36	7.85	200	75	250	250	–	400	400	–	30	0.32	12
	Structural A992	7.85	200	75	345	345	–	450	450	–	30	0.32	12
	Stainless 304	7.86	193	75	207	207	–	517	517	–	40	0.27	17
	Tool L2	8.16	200	75	703	703	–	800	800	–	22	0.32	12
Titanium Alloy	[Ti-6Al-4V]	4.43	120	44	924	924	–	1,000	1,000	–	16	0.36	9.4
Nonmetallic													
Concrete	Low Strength	2.38	22.1	–	–	–	12	–	–	–	–	0.15	11
	High Strength	2.37	29.0	–	–	–	38	–	–	–	–	0.15	11
Plastic Reinforced	Kevlar 49	1.45	131	–	–	–	–	717	483	20.3	2.8	0.34	–
	30% Glass	1.45	72.4	–	–	–	–	90	131	–	–	0.34	–
Wood Select Structural Grade	Douglas Fir	0.47	13.1	–	–	–	–	2.1[c]	26[d]	6.2[d]	–	0.29[e]	–
	White Spruce	3.60	9.65	–	–	–	–	2.5[c]	36[d]	6.7[d]	–	0.31[e]	–

[a] Specific values may vary for a particular material due to alloy or mineral composition,mechanical working of the specimen,or heat treatment. For a more exact value reference books for the material should be consulted.

[b] The yield and ultimate strengths for ductile materials can be assumed equal for both tension and compression.

[c] Measured perpendicular to the grain.

[d] Measured parallel to the grain.

[e] Deformation measured perpendicular to the grain when the load is applied along the grain.