

LoRaWAN Regional Parameters

Copyright © 2016 LoRa Alliance, Inc. All rights reserved.

NOTICE OF USE AND DISCLOSURE

Copyright © LoRa Alliance, Inc. (2015). All Rights Reserved.

The information within this document is the property of the LoRa Alliance ("The Alliance") and its use and disclosure are subject to LoRa Alliance Corporate Bylaws, Intellectual Property Rights (IPR) Policy and Membership Agreements.

Elements of LoRa Alliance specifications may be subject to third party intellectual property rights, including without limitation, patent, copyright or trademark rights (such a third party may or may not be a member of LoRa Alliance). The Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

This document and the information contained herein are provided on an "AS IS" basis and THE ALLIANCE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO (A) ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OF THIRD PARTIES (INCLUDING WITHOUT LIMITATION ANY INTELLECTUAL PROPERTY RIGHTS INCLUDING PATENT, COPYRIGHT OR TRADEMARK RIGHTS) OR (B) ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE OR NON-INFRINGEMENT.

IN NO EVENT WILL THE ALLIANCE BE LIABLE FOR ANY LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OF DATA, INTERRUPTION OF BUSINESS, OR FOR ANY OTHER DIRECT, INDIRECT, SPECIAL OR EXEMPLARY, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND, IN CONTRACT OR IN TORT, IN CONNECTION WITH THIS DOCUMENT OR THE INFORMATION CONTAINED HEREIN, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The above notice and this paragraph must be included on all copies of this document that are made.

LoRa Alliance, Inc.

2400 Camino Ramon, Suite 375

San Ramon, CA 94583

Note: All Company, brand and product names may be trademarks that are the sole property of their respective owners.



LoRaWAN™ Regional Parameters

This document is a companion document to the LoRaWAN Specification

Authors:

LoRa Alliance Technical committee

Version: V1.0

Date: 2016 July

Status: Final

Contents

1	1	Introduction	6
2	2	LoRaWAN Regional Parameters	7
3	2.1	EU 863-870MHz ISM Band	7
4	2.1.1	EU863-870 Preamble Format	7
5	2.1.2	EU863-870 ISM Band channel frequencies	7
6	2.1.3	EU863-870 Data Rate and End-device Output Power encoding	8
7	2.1.4	EU863-870 JoinAccept CFList	8
8	2.1.5	EU863-870 LinkAdrReq command	9
9	2.1.6	EU863-870 Maximum payload size	9
10	2.1.7	EU863-870 Receive windows	10
11	2.1.8	EU863-870 Default Settings	10
12	2.2	US 902-928MHz ISM Band	12
13	2.2.1	US902-928 Preamble Format	12
14	2.2.2	US902-928 Channel Frequencies	12
15	2.2.3	US902-928 Data Rate and End-device Output Power encoding	13
16	2.2.4	US902-928 JoinAccept CFList	13
17	2.2.5	US902-928 LinkAdrReq command	13
18	2.2.6	US902-928 Maximum payload size	14
19	2.2.7	US902-928 Receive windows	15
20	2.2.8	US902-928 Default Settings	15
21	2.3	China 779-787MHz ISM Band	17
22	2.3.1	CN779-787 Preamble Format	17
23	2.3.2	CN779-787 ISM Band channel frequencies	17
24	2.3.3	CN779-787 Data Rate and End-device Output Power encoding	18
25	2.3.4	CN779-787 JoinAccept CFList	18
26	2.3.5	CN779-787 LinkAdrReq command	19
27	2.3.6	CN779-787 Maximum payload size	19
28	2.3.7	CN779-787 Receive windows	20
29	2.3.8	CN779-787 Default Settings	20
30	2.4	EU 433MHz ISM Band	21
31	2.4.1	EU433 Preamble Format	21
32	2.4.2	EU433 ISM Band channel frequencies	21
33	2.4.3	EU433 Data Rate and End-device Output Power encoding	22
34	2.4.4	EU433 JoinAccept CFList	22
35	2.4.5	EU433 LinkAdrReq command	22
36	2.4.6	EU433 Maximum payload size	23
37	2.4.7	EU433 Receive windows	23
38	2.4.8	EU433 Default Settings	24
39	2.5	Australia 915-928MHz ISM Band	25
40	2.5.1	AU915-928 Preamble Format	25
41	2.5.2	AU915-928 Channel Frequencies	25
42	2.5.3	AU915-928 Data Rate and End-point Output Power encoding	26
43	2.5.4	AU915-928 JoinAccept CFList	26
44	2.5.5	AU915-928 LinkAdrReq command	26
45	2.5.6	AU915-928 Maximum payload size	27
46	2.5.7	AU915-928 Receive windows	28
47	2.5.8	AU915-928 Default Settings	28
48	2.6	CN 470-510MHz Band	30
49	2.6.1	CN470-510 Preamble Format	30
50			

1	2.6.2	CN470-510 Channel Frequencies	30
2	2.6.3	CN470-510 Data Rate and End-point Output Power encoding	31
3	2.6.4	CN470-510 JoinResp CFList	31
4	2.6.5	CN470-510 LinkAdrReq command	31
5	2.6.6	CN470-510 Maximum payload size	32
6	2.6.7	CN470-510 Receive windows	32
7	2.6.8	CN470-510 Default Settings	32
8	2.7	AS923MHz ISM Band	34
9	2.7.1	AS923 Preamble Format	34
10	2.7.2	AS923 ISM Band channel frequencies	34
11	2.7.3	AS923 Data Rate and End-point Output Power encoding	35
12	2.7.4	AS923 JoinAccept CFList	36
13	2.7.5	AS923 LinkAdrReq command	36
14	2.7.6	AS923 Maximum payload size	36
15	2.7.7	AS923 Receive windows	37
16	2.7.8	AS923 Default Settings	38
17	2.8	South Korea 920-923MHz ISM Band	38
18	2.8.1	KR920-923 Preamble Format	38
19	2.8.2	KR920-923 ISM Band channel frequencies	38
20	2.8.3	KR920-923 Data Rate and End-device Output Power encoding	39
21	2.8.4	KR920-923 JoinAccept CFList	40
22	2.8.5	KR920-923 LinkAdrReq command	41
23	2.8.6	KR920-923 Maximum payload size	41
24	2.8.7	KR920-923 Receive windows	41
25	2.8.8	KR920-923 Default Settings	42
26	3	Revisions	43
27	3.1	Revision 1.0	43
28	4	Bibliography	44
29	4.1	References	44
30	5	NOTICE OF USE AND DISCLOSURE	45
31			

32 Tables

33	Table 1:	EU863-870 synch words	7
34	Table 2:	EU863-870 default channels	7
35	Table 3:	EU863-870 JoinReq Channel List	8
36	Table 4:	TX Data rate table	8
37	Table 5:	TX power table	8
38	Table 6:	ChMaskCntl value table	9
39	Table 7:	EU863-870 maximum payload size	10
40	Table 8 :	EU863-870 maximum payload size (not repeater compatible)	10
41	Table 9:	TX Data rate table	13
42	Table 10:	TX power table	13
43	Table 11:	ChMaskCntl value table	14
44	Table 12:	US902-928 maximum payload size (repeater compatible)	15
45	Table 13 :	US902-928 maximum payload size (not repeater compatible)	15
46	Table 14:	Data rate mapping	15
47	Table 15:	CN779-787 synch words	17
48	Table 16:	CN780 JoinReq Channel List	17
49	Table 17:	Data rate and TX power table	18
50	Table 18:	ChMaskCntl value table	19

1	Table 19: CN780 maximum payload size	19
2	Table 20 : CN780 maximum payload size (not repeater compatible)	20
3	Table 21: EU433 synch words	21
4	Table 22: EU433 JoinReq Channel List.....	21
5	Table 23: Data rate and TX power table	22
6	Table 24: ChMaskCntl value table	23
7	Table 25: EU433 maximum payload size	23
8	Table 26 : EU433 maximum payload size (not repeater compatible)	23
9	Table 27 : EU43 RX1DROffset	24
10	Table 28: AU915 Data rate table	26
11	Table 29 : AU915 TX power table.....	26
12	Table 30: ChMaskCntl value table	27
13	Table 31: AU915-928 maximum payload size	27
14	Table 32: AU915-928 maximum payload size (not repeater compatible)	28
15	Table 33: AU RX1DROffset	28
16	Table 34: CN470 Data rate and TX power table	31
17	Table 35: CN470 ChMaskCntl value table	31
18	Table 36: CN470-510 maximum payload size	32
19	Table 37: CN470-510 Data rate offset	32
20	Table 38: AS923 synch words	34
21	Table 39: AS923 default channels	34
22	Table 40: AS923 JoinReq Channel List	35
23	Table 41: Data rate table	35
24	Table 42: TxPower table	35
25	Table 43: ChMaskCntl value table	36
26	Table 44: AS923 maximum payload size.....	37
27	Table 45: AS923 maximum payload size (not repeater compatible)	37
28	Table 46 :KR920-923 synch words.....	38
29	Table 47: Center frequency, bandwidth, maximum ERP output power table	39
30	Table 48: KR920-923 default channels.....	39
31	Table 49: KR920-923 JoinReq Channel List.....	39
32	Table 50: TX Data rate table	40
33	Table 51: TX power table	40
34	Table 52: ChMaskCntl value table	41
35	Table 53: KR920-923 maximum payload size	41

36

Figures

37		
38	Figure 1: US902-928 channel frequencies	12
39	Figure 2: AU915-928 channel frequencies	25
40	Figure 3: CN470-510 channel frequencies	30

41

1 Introduction

This document describes the LoRaWAN™ regional parameters for different regulatory regions worldwide. This document is a companion document to the protocol specification document, LoRaWAN Specification [LORAWAN], starting with version 1.0.2 of the specification. Separating the regional parameters from the protocol specification allows the addition of new regions to the former without impacting the latter document.

2 LoRaWAN Regional Parameters

2.1 EU 863-870MHz ISM Band

2.1.1 EU863-870 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 1: EU863-870 synch words

2.1.2 EU863-870 ISM Band channel frequencies

This section applies to any region where the ISM radio spectrum use is defined by the ETSI [EN300.220] standard.

The network channels can be freely attributed by the network operator. However the three following default channels must be implemented in every EU868MHz end-device. Those channels are the minimum set that all network gateways should always be listening on.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	868.10 868.30 868.50	DR0 to DR5 / 0.3-5 kbps	3	<1%

Table 2: EU863-870 default channels

In order to access the physical medium the ETSI regulations impose some restrictions such maximum time the transmitter can be on or the maximum time a transmitter can transmit per hour. The ETSI regulations allow the choice of using either a duty-cycle limitation or a so-called **Listen Before Talk Adaptive Frequency Agility** (LBT AFA) transmissions management. The current LoRaWAN specification exclusively uses duty-cycled limited transmissions to comply with the ETSI regulations.

EU868MHz ISM band end-devices should use the following default parameters

- Default ERP: 14 dBm

EU868MHz end-devices should be capable of operating in the 863 to 870 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 868.1, 868.3, and 868.5 MHz / DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and network gateways.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message. The JoinReq message transmit duty-cycle shall follow the

rules described in chapter “Retransmissions back-off” of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	868.10 868.30 868.50	DR0 – DR5 / 0.3-5 kbps	3

Table 3: EU863-870 JoinReq Channel List

2.1.3 EU863-870 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the EU863-870 PHY layer. The ***TxParamSetupReq*** MAC command does not have to be implemented by EU863-870 devices.

The following encoding is used for Data Rate (DR) and End-device Output Power (TXPower) in the EU863-870 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6	LoRa: SF7 / 250 kHz	11000
7	FSK: 50 kbps	50000
8..15	RFU	

Table 4: TX Data rate table

TXPower	Configuration (ERP)
0	20 dBm
1	14 dBm
2	11 dBm
3	8 dBm
4	5 dBm
5	2 dBm
6..15	RFU

Table 5: TX power table

2.1.4 EU863-870 JoinAccept CFList

The EU 863-870 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the **CFList** is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels as defined in Chapter **Error! Reference source not found.** The newly defined channels are immediately enabled and usable by the end-device for communication.

2.1.5 EU863-870 LinkAdrReq command

The EU863-870 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 6: ChMaskCntl value table

If the ChMaskCntl field value is one of values meaning RFU, the end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.1.6 EU863-870 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222

6	230	222
7	230	222
8:15	Not defined	

Table 7: EU863-870 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242
8:15	Not defined	

Table 8 : EU863-870 maximum payload size (not repeater compatible)

2.1.7 EU863-870 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the [6:7] range are reserved for future use.

RX1DROffset Upstream data rate	0	1	2	3	4	5
Downstream data rate in RX1 slot						
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0
DR6	DR6	DR5	DR4	DR3	DR2	DR1
DR7	DR7	DR6	DR5	DR4	DR3	DR2

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 869.525 MHz / DR0 (SF12, 125 kHz)

2.1.8 EU863-870 Default Settings

The following parameters are recommended values for the EU863-870MHz band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384

1	ADR_ACK_LIMIT	64
2	ADR_ACK_DELAY	32
3	ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

4 If the actual parameter values implemented in the end-device are different from those default
5 values (for example the end-device uses a longer RECEIVE_DELAY1 and
6 RECEIVE_DELAY2 latency), those parameters must be communicated to the network
7 server using an out-of-band channel during the end-device commissioning process. The
8 network server may not accept parameters different from those default values.

9

2.2 US 902-928MHz ISM Band

2.2.1 US902-928 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

LoRaWAN does not make use of GFSK modulation in the US902-928 ISM band.

2.2.2 US902-928 Channel Frequencies

The 915 MHz ISM Band shall be divided into the following channel plans.

- Upstream – 64 channels numbered 0 to 63 utilizing LoRa 125 kHz BW varying from DR0 to DR3, using coding rate 4/5, starting at 902.3 MHz and incrementing linearly by 200 kHz to 914.9 MHz
- Upstream – 8 channels numbered 64 to 71 utilizing LoRa 500 kHz BW at DR4 starting at 903.0 MHz and incrementing linearly by 1.6 MHz to 914.2 MHz
- Downstream – 8 channels numbered 0 to 7 utilizing LoRa 500 kHz BW at DR8 to DR13) starting at 923.3 MHz and incrementing linearly by 600 kHz to 927.5 MHz

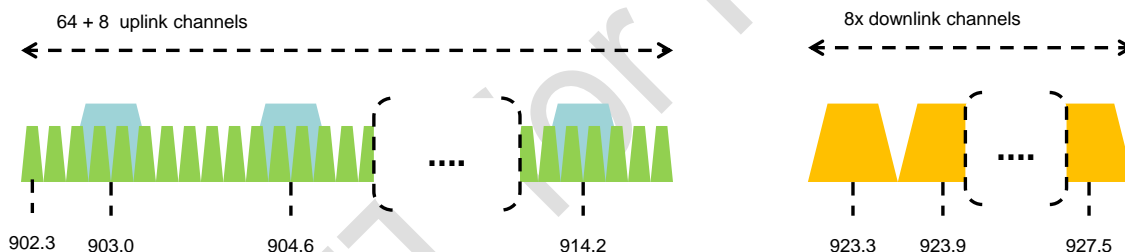


Figure 1: US902-928 channel frequencies

915 MHz ISM band end-devices should use the following default parameters:

- Default radiated transmit output power: 20 dBm
 - Devices, when transmitting with 125 kHz BW may use a maximum of +30 dBm. The transmission shall never last more than 400 ms.
 - Devices, when transmitting with 500 kHz BW may use a maximum of +26 dBm

US902-928 end-devices should be capable of operating in the 902 to 928 MHz frequency band and should feature a channel data structure to store the parameters of 72 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

If using the over-the-air activation procedure, the end-device should broadcast the JoinReq message alternatively on a random 125 kHz channel amongst the 64 channels defined using **DR0** and a random 500 kHz channel amongst the 8 channels defined using **DR4**. The end-device should change channel for every transmission.

Personalized devices shall have all 72 channels enabled following a reset.

2.2.3 US902-928 Data Rate and End-device Output Power encoding

FCC regulation imposes a maximum dwell time of 400ms on uplinks. The **TxParamSetupReq** MAC command does not have to be implemented by US902-928 devices.

The following encoding is used for Data Rate (**DR**) and End-device Output Power (**TXPower**) in the US902-928 band:

DataRate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa: SF10 / 125 kHz	980
1	LoRa: SF9 / 125 kHz	1760
2	LoRa: SF8 / 125 kHz	3125
3	LoRa: SF7 / 125 kHz	5470
4	LoRa: SF8 / 500 kHz	12500
5:7	RFU	
8	LoRa: SF12 / 500 kHz	980
9	LoRa: SF11 / 500 kHz	1760
10	LoRa: SF10 / 500 kHz	3900
11	LoRa: SF9 / 500 kHz	7000
12	LoRa: SF8 / 500 kHz	12500
13	LoRa: SF7 / 500 kHz	21900
14:15	RFU	

Table 9: TX Data rate table

Note: DR4 is purposely identical to DR12, DR8..13 must be implemented in end-devices and are reserved for future applications

TXPower	Configuration
0	30 dBm – 2*TXpower
1	28 dBm
2	26 dBm
3 : 9
10	10 dBm
11:15	RFU

Table 10: TX power table

2.2.4 US902-928 JoinAccept CFList

The US902-928 LoRaWAN does not support the use of the optional **CFList** appended to the JoinAccept message. If the **CFList** is not empty it is ignored by the end-device.

2.2.5 US902-928 LinkAdrReq command

For the US902-928 version the **ChMaskCntl** field of the **LinkADRReq** command has the following meaning:

ChMaskCntl	ChMask applies to
0	Channels 0 to 15
1	Channels 16 to 31
..	..
4	Channels 64 to 71
5	RFU
6	All 125 kHz ON ChMask applies to channels 64 to 71
7	All 125 kHz OFF ChMask applies to channels 64 to 71

Table 11: ChMaskCntl value table

If **ChMaskCntl** = 6 then 125 kHz channels are enabled, if **ChMaskCntl** = 7 then 125 kHz channels are disabled. Simultaneously the channels 64 to 71 are set according to the **ChMask** bit mask. The DataRate specified in the command need not be valid for channels specified in the ChMask, as it governs the global operational state of the end-device.

Note: FCC regulation requires hopping over at least 50 channels when using maximum output power. It is possible to have end-devices with less channels (at least six 125 kHz channels) when limiting the end-device transmit power to 21 dBm.

Note: A common network server action may be to reconfigure a device through multiple LinkAdrReq commands in a contiguous block of MAC Commands. For example to reconfigure a device from 64 channel operation to the first 8 channels could contain two LinkAdrReq, the first (ChMaskCntl = 7) to disable all 125kHz channels and the second (ChMaskCntl = 0) to enable a bank of 8 125kHz channels.

2.2.6 US902-928 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from the maximum allowed transmission time at the PHY layer taking into account a possible repeater encapsulation. The maximum application payload length in the absence of the optional **FOpt** MAC control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	19	11
1	61	53
2	133	125
3	250	242
4	250	242
5:7	Not defined	
8	41	33
9	117	109
10	230	222
11	230	222
12	230	222
13	230	222
14:15	Not defined	

Table 12: US902-928 maximum payload size (repeater compatible)

The greyed lines correspond to the data rates that may be used by an end-device behind a repeater.

If the end-device will never operate under a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	<i>M</i>	<i>N</i>
0	19	11
1	61	53
2	133	125
3	250	242
4	250	242
5:7	Not defined	
8	61	53
9	137	129
10	250	242
11	250	242
12	250	242
13	250	242
14:15	Not defined	

Table 13 : US902-928 maximum payload size (not repeater compatible)

2.2.7 US902-928 Receive windows

- The RX1 receive channel is a function of the upstream channel used to initiate the data exchange. The RX1 receive channel can be determined as follows.
 - RX1 Channel Number = Transmit Channel Number modulo 8
- The RX1 window data rate depends on the transmit data rate (see Table 14 below).
- The RX2 (second receive window) settings uses a fixed data rate and frequency. Default parameters are 923.3MHz / DR8

Upstream data rate	Downstream data rate			
RX1DROffset	0	1	2	3
DR0	DR10	DR9	DR8	DR8
DR1	DR11	DR10	DR9	DR8
DR2	DR12	DR11	DR10	DR9
DR3	DR13	DR12	DR11	DR10
DR4	DR13	DR13	DR12	DR11

Table 14: Data rate mapping

The allowed values for RX1DROffset are in the [0:3] range. Values in the range [4:7] are reserved for future use.

2.2.8 US902-928 Default Settings

The following parameters are recommended values for the US902-928 band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64

1	ADR_ACK_DELAY	32
2	ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)
3	If the actual parameter values implemented in the end-device are different from those default	
4	values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency), those	
5	parameters must be communicated to the network server using an out-of-band channel	
6	during the end-device commissioning process. The network server may not accept	
7	parameters different from those default values.	
8		

2.3 China 779-787MHz ISM Band

2.3.1 CN779-787 Preamble Format

The following synchronization words should be used :

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 15: CN779-787 synch words

2.3.2 CN779-787 ISM Band channel frequencies

The LoRaWAN can be used in the Chinese 779-787MHz band as long as the radio device ERP is less than 10mW (or 10dBm).

The end-device transmit duty-cycle should be lower than 1%.

The LoRaWAN channels center frequency can be in the following range:

- Minimum frequency : 779.5MHz
- Maximum frequency : 786.5 MHz

CN780MHz end-devices should be capable of operating in the 779 to 787 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 779.5, 779.7 and 779.9 MHz with DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and gateways of all networks. Other channels can be freely distributed across the allowed frequency range on a network per network basis.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message. The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	779.5 779.7 779.9 780.5 780.7 780.9	DR0 – DR5 / 0.3-5 kbps	6	<0.1%

Table 16: CN780 JoinReq Channel List

2.3.3 CN779-787 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the CN779-787 PHY layer. The ***TxParamSetupReq*** MAC command does not have to be implemented by CN779-787 devices.

The following encoding is used for Data Rate (DR) and End-device Output Power (TXPower) in the CN780 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]	TXPower	Configuration
0	LoRa: SF12 / 125 kHz	250	0	10 dBm
1	LoRa: SF11 / 125 kHz	440	1	7 dBm
2	LoRa: SF10 / 125 kHz	980	2	4 dBm
3	LoRa: SF9 / 125 kHz	1760	3	1 dBm
4	LoRa: SF8 / 125 kHz	3125	4	-2 dBm
5	LoRa: SF7 / 125 kHz	5470	5	-5 dBm
6	LoRa: SF7 / 250 kHz	11000	6..15	RFU
7	FSK: 50 kbps	50000		
8..15	RFU			

Table 17: Data rate and TX power table

2.3.4 CN779-787 JoinAccept CFList

The CN780 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels as defined in Chapter 6.

The newly defined channels are immediately enabled and usable by the end-device for communication.

2.3.5 CN779-787 LinkAdrReq command

The CN780 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 18: ChMaskCntl value table

If the ChMask field value is one of values meaning RFU, then end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.3.6 CN779-787 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	250	242
7	230	222
8:15	Not defined	

Table 19: CN780 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242

8:15	Not defined
------	-------------

Table 20 : CN780 maximum payload size (not repeater compatible)

2.3.7 CN779-787 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the range [6:7] are reserved for future use

RX1DROffset Upstream data rate	0	1	2	3	4	5
Downstream data rate in RX1 slot						
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0
DR6	DR6	DR5	DR4	DR3	DR2	DR1
DR7	DR7	DR6	DR5	DR4	DR3	DR2

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 786 MHz / DR0.

2.3.8 CN779-787 Default Settings

The following parameters are recommended values for the CN779-787MHz band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 and RECEIVE_DELAY2 latency), those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.

2.4 EU 433MHz ISM Band

2.4.1 EU433 Preamble Format

The following synchronization words should be used :

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 21: EU433 synch words

2.4.2 EU433 ISM Band channel frequencies

The LoRaWAN can be used in the ETSI 433-434 MHz band as long as the radio device ERP is less than 10 mW (or 10 dBm).

The end-device transmit duty-cycle should be lower than 1%¹.

The LoRaWAN channels center frequency can be in the following range:

- Minimum frequency : 433.175 MHz
- Maximum frequency : 434.665 MHz

EU433 end-devices should be capable of operating in the 433.05 to 434.79 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 433.175, 433.375 and 433.575 MHz with DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and gateways of all networks. Other channels can be freely distributed across the allowed frequency range on a network per network basis.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message. The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	433.175 433.375 433.575	DR0 – DR5 / 0.3-5 kbps	3	<1%

Table 22: EU433 JoinReq Channel List

¹ The EN300220 ETSI standard limits to 10% the maximum transmit duty-cycle in the 433MHz ISM band. The LoRaWAN requires a 1% transmit duty-cycle lower than the legal limit to avoid network congestion.

2.4.3 EU433 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the EU433 PHY layer. The **TxParamSetupReq** MAC command does not have to be implemented by EU433 devices.

The following encoding is used for Data Rate (DR) and End-device Output Power (TXPower) in the EU433 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]	TXPower	Configuration
0	LoRa: SF12 / 125 kHz	250	0	10 dBm
1	LoRa: SF11 / 125 kHz	440	1	7 dBm
2	LoRa: SF10 / 125 kHz	980	2	4 dBm
3	LoRa: SF9 / 125 kHz	1760	3	1 dBm
4	LoRa: SF8 / 125 kHz	3125	4	-2 dBm
5	LoRa: SF7 / 125 kHz	5470	5	-5 dBm
6	LoRa: SF7 / 250 kHz	11000	6..15	RFU
7	FSK: 50 kbps	50000		
8..15	RFU			

Table 23: Data rate and TX power table

2.4.4 EU433 JoinAccept CFList

The EU433 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125 kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels as defined in Chapter 6.

The newly defined channels are immediately enabled and usable by the end-device for communication.

2.4.5 EU433 LinkAdrReq command

The EU433 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..

ChMaskCntl	ChMask applies to
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 24: ChMaskCntl value table

If the ChMask field value is one of the values meaning RFU, then end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.4.6 EU433 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	230	222
7	230	222
8:15	Not defined	

Table 25: EU433 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242
8:15	Not defined	

Table 26 : EU433 maximum payload size (not repeater compatible)

2.4.7 EU433 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The

allowed values for RX1DROffset are in the [0:5] range. Values in the range [6:7] are reserved for future use.

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0
DR6	DR6	DR5	DR4	DR3	DR2	DR1
DR7	DR7	DR6	DR5	DR4	DR3	DR2

Table 27 : EU43 RX1DROffset

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 434.665MHz / DR0 (SF12, 125kHz)

2.4.8 EU433 Default Settings

The following parameters are recommended values for the EU433band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency) , those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.

2.5 Australia 915-928MHz ISM Band

2.5.1 AU915-928 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

LoRaWAN does not make use of GFSK modulation in the AU915-928 ISM band.

2.5.2 AU915-928 Channel Frequencies

The AU ISM Band shall be divided into the following channel plans.

- Upstream – 64 channels numbered 0 to 63 utilizing LoRa 125 kHz BW varying from DR0 to DR3, using coding rate 4/5, starting at 915.2 MHz and incrementing linearly by 200 kHz to 927.8 MHz
- Upstream – 8 channels numbered 64 to 71 utilizing LoRa 500 kHz BW at DR4 starting at 915.9 MHz and incrementing linearly by 1.6 MHz to 927.1 MHz
- Downstream – 8 channels numbered 0 to 7 utilizing LoRa 500 kHz BW at DR8 to DR13) starting at 923.3 MHz and incrementing linearly by 600 kHz to 927.5 MHz

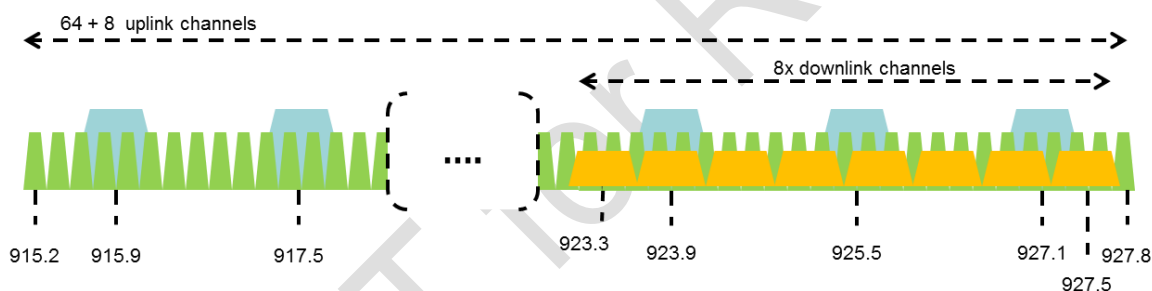


Figure 2: AU915-928 channel frequencies

AU ISM band end-devices should use the following default parameters:

- Default radiated transmit output power: 20 dBm
 - All Devices may use a maximum of +30 dBm.
 - Devices, when transmitting with 125 kHz BW must frequency hop using a minimum of 20 channels. . The transmission shall never last more than 400 ms.
 - Devices, when transmitting with 500 kHz BW may use a maximum of +26 dBm

AU915-928 end-devices should be capable of operating in the 915 to 928 MHz frequency band and should feature a channel data structure to store the parameters of 72 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

If using the over-the-air activation procedure, the end-device should broadcast the JoinReq message alternatively on a random 125 kHz channel amongst the 64 channels defined using **DR0** and a random 500 kHz channel amongst the 4 channels defined using **DR4**. The end-device should change channel for every transmission.

Personalized devices shall have all 72 channels enabled following a reset.

2.5.3 AU915-928 Data Rate and End-point Output Power encoding

The **TxParamSetupReq** MAC command does not have to be implemented by AU915-928 devices.

The following encoding is used for Data Rate (DR) and End-point Output Power (TXPower) in the AU915-928 band:

DataRate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa: SF10 / 125 kHz	980
1	LoRa: SF9 / 125 kHz	1760
2	LoRa: SF8 / 125 kHz	3125
3	LoRa: SF7 / 125 kHz	5470
4	LoRa: SF8 / 500 kHz	12500
5:7	RFU	
8	LoRa: SF12 / 500 kHz	980
9	LoRa: SF11 / 500 kHz	1760
10	LoRa: SF10 / 500 kHz	3900
11	LoRa: SF9 / 500 kHz	7000
12	LoRa: SF8 / 500 kHz	12500
13	LoRa: SF7 / 500 kHz	21900
14:15	RFU	

Table 28: AU915 Data rate table

TXPower	Configuration
0	30 dBm – 2*TXpower
1	28 dBm
2	26 dBm
3 : 9
10	10 dBm
11:15	RFU

Table 29 : AU915 TX power table

DR4 is identical to DR12, DR8...13 must be implemented in end-devices and are reserved for future applications.

2.5.4 AU915-928 JoinAccept CFList

The AU915-928 LoRaWAN does not support the use of the optional **CFList** appended to the JoinAccept message. If the **CFList** is not empty it is ignored by the end-device.

2.5.5 AU915-928 LinkAdrReq command

For the AU915-928 version the **ChMaskCntl** field of the **LinkADRReq** command has the following meaning:

ChMaskCntl | **ChMask applies to**

ChMaskCntl	ChMask applies to
0	Channels 0 to 15
1	Channels 16 to 31
..	..
4	Channels 64 to 71
5	RFU
6	All 125 kHz ON ChMask applies to channels 64 to 71
7	All 125 kHz OFF ChMask applies to channels 64 to 71

Table 30: ChMaskCntl value table

If **ChMaskCntl** = 6 (resp 7) then 125 kHz channels are enabled (resp disabled). Simultaneously the channels 64 to 67 are set according to the **ChMask** bit mask.

Note: ACMA regulation requires hopping over at least 20 channels when using channels that do not meet a minimum 6 dB bandwidth of 500 kHz.

2.5.6 AU915-928 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from the maximum allowed transmission time at the PHY layer taking into account a possible repeater encapsulation. The maximum application payload length in the absence of the optional **FOpt** MAC control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	19	11
1	61	53
2	134	126
3	250	242
4	250	242
5:7	Not defined	
8	41	33
9	117	109
10	230	222
11	230	222
12	230	222
13	230	222
14:15	Not defined	

Table 31: AU915-928 maximum payload size

The greyed lines correspond to the data rates that may be used by an end-device behind a repeater.

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	<i>M</i>	<i>N</i>
0	19	11
1	61	53
2	134	126
3	250	242
4	250	242
5:7	Not defined	
8	61	53
9	137	129
10	250	242
11	250	242
12	250	242
13	250	242
14:15	Not defined	

Table 32: AU915-928 maximum payload size (not repeater compatible)

2.5.7 AU915-928 Receive windows

- The RX1 receive channel is a function of the upstream channel used to initiate the data exchange. The RX1 receive channel can be determined as follows.
 - RX1 Channel Number = Transmit Channel Number modulo 8
- The RX1 window data rate depends on the transmit data rate (see Table 14 below).
- The RX2 (second receive window) settings uses a fixed data rate and frequency. Default parameters are 923.3Mhz / DR8

Upstream data rate	Downstream data rate			
RX1DROffset	0	1	2	3
DR0	DR10	DR9	DR8	DR8
DR1	DR11	DR10	DR9	DR8
DR2	DR12	DR11	DR10	DR9
DR3	DR13	DR12	DR11	DR10
DR4	DR13	DR13	DR12	DR11

Table 33: AU RX1DROffset

The allowed values for RX1DROffset are in the [0:3] range. Values in the range [4:7] are reserved for future use.

2.5.8 AU915-928 Default Settings

The following parameters are recommended values for the AU915-928 band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency), those parameters must be communicated to the network server using an out-of-band channel

- 1 during the end-device commissioning process. The network server may not accept
- 2 parameters different from those default values.
- 3

DRAFT for Review

2.6 CN 470-510MHz Band

2.6.1 CN470-510 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

2.6.2 CN470-510 Channel Frequencies

In China, this band is defined by SRRC to be used for civil metering applications.

The 470 MHz ISM Band shall be divided into the following channel plans:

- Upstream – 96 channels numbered 0 to 95 utilizing LoRa 125 kHz BW varying from DR0 to DR5, using coding rate 4/5, starting at 470.3 MHz and incrementing linearly by 200 kHz to 489.3 MHz.

Channel Index 6 to 38 and 45 to 77 are mainly used by China Electric Power. In the areas where these channels are used by China Electric Power, they should be disabled.

- Downstream – 48 channels numbered 0 to 47 utilizing LoRa 125 kHz BW varying from DR0 to DR5, using coding rate 4/5, starting at 500.3 MHz and incrementing linearly by 200 kHz to 509.7 MHz

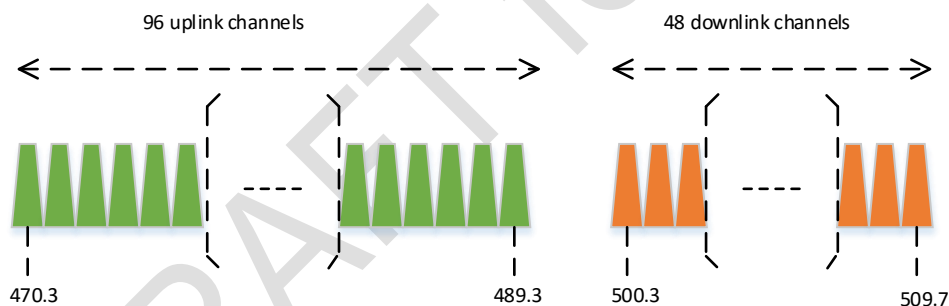


Figure 3: CN470-510 channel frequencies

The LoRaWAN can be used in the Chinese 470-510MHz band as long as

- The radio device EIRP is less than 50mW (or 17dBm).
- The transmission never lasts more than 5000 ms.

CN470 MHz band end-devices should use the following default parameters:

- Default radiated transmits output power: 14 dBm.

CN470-510 end-devices should be capable of operating in the 470 to 510 MHz frequency band and should feature a channel data structure to store the parameters of 96 uplink channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

If using the over-the-air activation procedure, the end-device should broadcast the JoinReq message on a random 125 kHz channel amongst the 96 uplink channels defined using **DR5 to DR0**.

Personalized devices shall have all 96 channels enabled following a reset.

2.6.3 CN470-510 Data Rate and End-point Output Power encoding

There is no dwell time limitation for the CN470-510 PHY layer. The **TxParamSetupReq** MAC command does not have to be implemented by CN470-510 devices.

The following encoding is used for Data Rate (**DR**) and End-point Output Power (**TXPower**) in the CN470-510 band:

DataRate	Configuration	Indicative physical bit rate [bit/sec]	TXPower	Configuration
0	LoRa: SF12 / 125 kHz	250	0	17 dBm
1	LoRa: SF11 / 125 kHz	440	1	16 dBm
2	LoRa: SF10 / 125 kHz	980	2	14 dBm
3	LoRa: SF9 / 125 kHz	1760	3	12 dBm
4	LoRa: SF8 / 125 kHz	3125	4	10 dBm
5	LoRa:SF7 / 125 kHz	5470	5	7 dBm
6	RFU		6	5 dBm
7	RFU		7	2 dBm
8...15	RFU		8...15	RFU

Table 34: CN470 Data rate and TX power table

2.6.4 CN470-510 JoinResp CFList

The CN470-510 LoRaWAN does not support the use of the optional **CFList** appended to the JoinAccept message. If the **CFList** is not empty it is ignored by the end-device.

2.6.5 CN470-510 LinkAdrReq command

For the CN470-510 version the **ChMaskCntl** field of the **LinkADRReq** command has the following meaning:

ChMaskCntl	ChMask applies to
0	Channels 0 to 15
1	Channels 16 to 31
2	Channels 32 to 47
3	Channels 48 to 63
4	Channels 64 to 79
5	Channels 80 to 95
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 35: CN470 ChMaskCntl value table

If the ChMask field value is one of the values meaning RFU, then end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.6.6 CN470-510 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from the maximum allowed transmission time at the PHY layer taking into account a possible repeater encapsulation. The maximum application payload length in the absence of the optional **FOpt** MAC control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6:15	Not defined	

Table 36: CN470-510 maximum payload size

2.6.7 CN470-510 Receive windows

- The RX1 receive channel is a function of the upstream channel used to initiate the data exchange. The RX1 receive channel can be determined as follows.
 - RX1 Channel Number = Uplink Channel Number modulo 48, for example, when transmitting channel number is 49, the rx1 channel number is 1.
- The RX1 window data rate depends on the transmit data rate (see Table Table 37: CN470-510 Data rate offset below).
- The RX2 (second receive window) settings uses a fixed data rate and frequency. Default parameters are 505.3 MHz / DR0

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0

Table 37: CN470-510 Data rate offset

The allowed values for RX1DROffset are in the [0:3] range. Values in the range [4:7] are reserved for future use.

2.6.8 CN470-510 Default Settings

The following parameters are recommended values for the CN470-510 band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s

- | | | |
|---|---------------|--|
| 1 | MAX_FCNT_GAP | 16384 |
| 2 | ADR_ACK_LIMIT | 64 |
| 3 | ADR_ACK_DELAY | 32 |
| 4 | ACK_TIMEOUT | 2 +/- 1 s (random delay between 1 and 3 seconds) |
- 5 If the actual parameter values implemented in the end-device are different from those default
6 values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency), those
7 parameters must be communicated to the network server using an out-of-band channel
8 during the end-device commissioning process. The network server may not accept
9 parameters different from those default values.

2.7 AS923MHz ISM Band

2.7.1 AS923 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 38: AS923 synch words

2.7.2 AS923 ISM Band channel frequencies

This section applies to regions where the frequencies [923...923.5MHz] are comprised in the ISM band, which is the case for the following countries:

- ❖ Brunei [923-925 MHz]
- ❖ Cambodia [923-925 MHz]
- ❖ Hong Kong [920-925 MHz]
- ❖ Indonesia [923-925 MHz]
- ❖ Japan [920-928 MHz]
- ❖ Laos [923-925 MHz]
- ❖ New Zealand [915-928 MHz]
- ❖ Singapore [920-925 MHz]
- ❖ Taiwan [922-928 MHz]
- ❖ Thailand [920-925 MHz]
- ❖ Vietnam [920-925 MHz]

The network channels can be freely attributed by the network operator. However the two following default channels must be implemented in every AS923MHz end-device. Those channels are the minimum set that all network gateways should always be listening on.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	923.20 923.40	DR0 to DR5 / 0.3-5 kbps	2	< 1%

Table 39: AS923 default channels

Those default channels must be implemented in every end-device and cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and network gateways.

AS923MHz ISM band end-devices should use the following default parameters

- Default ERP: 14 dBm

AS923MHz end-devices should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	923.20 923.40	DR2	2	< 1%

Table 40: AS923 JoinReq Channel List

The default JoinReq Data Rate is DR2 (SF10/125KHz), this setting ensures that end-devices are compatible with the 400ms dwell time limitation until the actual dwell time limit is notified to the end-device by the network server via the MAC command "TxParamSetupReq".

The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

2.7.3 AS923 Data Rate and End-point Output Power encoding

The following encoding is used for Data Rate (DR) in the AS923 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6	LoRa: SF7 / 250 kHz	11000
7	FSK: 50 kbps	50000
8..15	RFU	

Table 41: Data rate table

The TXPower table indicates power levels relative to the Max ERP level of the end-device, as per the following table:

TXPower	Configuration
0	Max ERP
1	Max ERP – 2dB
2	Max ERP – 4dB
3	Max ERP – 6dB
4	Max ERP – 8dB
5	Max ERP – 10dB
6..15	RFU

Table 42: TxPower table

2.7.4 AS923 JoinAccept CFList

The AS923 LoRaWAN implements an optional channel frequency list (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels three to seven whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125 KHz LoRa modulation.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch3	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 915 and 928MHz in 100 Hz steps. Unused channels have a frequency value of 0. The CFList is optional and its presence can be detected by the length of the join-accept message. If present, the CFList replaces all the previous channels stored in the end-device apart from the two default channels as defined in Chapter 1.7.2. The newly defined channels are immediately enabled and usable by the end-device for communication.

2.7.5 AS923 LinkAdrReq command

The AS923 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 43: ChMaskCntl value table

If the ChMask field value is one of values meaning RFU, the end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.7.6 AS923 Maximum payload size

The maximum **MACPayload** size length (*M*) is given by the following table for both dwell time configurations: No Limit and 400ms. It is derived from the PHY layer limitation depending on the effective modulation rate used taking into account a possible repeater encapsulation layer.

DataRate	Uplink MAC Payload Size (<i>M</i>)	Downlink MAC Payload Size (<i>M</i>)
----------	--------------------------------------	--

	UplinkDwellTime = 0	UplinkDwellTime = 1	DownlinkDwellTime = 0	DownlinkDwellTime = 1
0	59	N/A	59	N/A
1	59	N/A	59	N/A
2	59	19	59	19
3	123	61	123	61
4	230	133	230	134
5	230	250	230	250
6	230	250	230	250
7	230	250	230	250
8:15	RFU		RFU	

Table 44: AS923 maximum payload size

If the end-device will never operate with a repeater then the maximum MAC payload length should be:

DataRate	Uplink MAC Payload Size (M)		Downlink MAC Payload Size (M)	
	UplinkDwellTime = 0	UplinkDwellTime = 1	DownlinkDwellTime = 0	DownlinkDwellTime = 1
0	59	N/A	59	N/A
1	59	N/A	59	N/A
2	59	19	59	19
3	123	61	123	61
4	250	133	250	134
5	250	250	250	250
6	250	250	250	250
7	250	250	250	250
8:15	RFU		RFU	

Table 45: AS923 maximum payload size (not repeater compatible)

The maximum application payload length in the absence of the optional **FOpt** control field (M) is eight bytes lower than the MACPayload value in the above table. The value of N might be smaller if the **FOpt** field is not empty.

2.7.7 AS923 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as following:

Downstream data rate in RX1 slot = $\text{MIN}(5, \text{MAX}(\text{MinDR}, \text{Upstream data rate} - \text{Effective_RX1DROffset}))$

MinDR depends on the DownlinkDwellTime bit sent to the device in the **TxParamSetupReq** command:

- Case DownlinkDwellTime = 0 (No limit): MinDR = 0
- Case DownlinkDwellTime = 1 (400ms): MinDR = 2

The allowed values for RX1DROffset are in the [0:7] range, encoded as per the below table:

RX1DROffset (Coded value)	0	1	2	3	4	5	6	7
Effective_RX1DROffset	0	1	2	3	4	5	-1	-2

Values in the [6:7] range allow setting the Downstream RX1 data rate higher than Upstream data rate.

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 923.2 MHz / DR2 (SF10/125KHz).

2.7.8 AS923 Default Settings

The following parameters are recommended values for the AS923MHz band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 and RECEIVE_DELAY2 latency), those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.

2.8 South Korea 920-923MHz ISM Band

2.8.1 KR920-923 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

Table 46 :KR920-923 synch words

2.8.2 KR920-923 ISM Band channel frequencies

The center frequency, bandwidth and maximum EIRP output power for the South Korea RFID/USN frequency band are already defined by Korean Government. Basically Korean Government allocated LPWA based IoT network frequency band from 920.9 to 923.3MHz.

Center frequency (MHz)	Bandwidth (kHz)	Maximum EIRP output power (dBm)	
		For end-device	For gateway
920.9	125	10	23
921.1	125	10	23
921.3	125	10	23
921.5	125	10	23
921.7	125	10	23
921.9	125	10	23
922.1	125	14	23
922.3	125	14	23
922.5	125	14	23

922.7	125	14	23
922.9	125	14	23
923.1	125	14	23
923.3	125	14	23

Table 47: Center frequency, bandwidth, maximum EIRP output power table

The three following default channels (922.1, 922.3 and 922.5MHz / DR0 to DR5) determined by the network operator from the set of available channels as defined by the South Korean regulation must be implemented in every KR920-923MHz end-device, and cannot be alterable by the **NewChannelReq** command. Those channels are the minimum set that all network gateways should always be listening on to guarantee a minimal common channel set between end-devices and network gateways.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	922.10 922.30 922.50	DR0 to DR5 / 0.3-5 kbps	3

Table 48: KR920-923 default channels

In order to access the physical medium the South Korea regulations impose some restrictions. The South Korea regulations allow the choice of using either a duty-cycle limitation or a so-called Listen Before Talk Adaptive Frequency Agility (LBT AFA) transmissions management. The current LoRaWAN specification for the KR920-923 ISM band exclusively uses LBT channel access rule to maximize MACPayload size length and comply with the South Korea regulations.

KR920-923MHz ISM band end-devices should use the following default parameters

- Default EIRP output power for end-device(920.9~921.9MHz): 10 dBm
- Default EIRP output power for end-device(922.1~923.3MHz): 14 dBm
- Default EIRP output power for gateway: 23 dBm

KR920-923MHz end-devices should be capable of operating in the 920 to 923MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	922.10 922.30 922.50	DR0 to DR5 / 0.3-5 kbps	3

Table 49: KR920-923 JoinReq Channel List

2.8.3 KR920-923 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the KR920-923 PHY layer. The **TxParamSetupReq** MAC command does not have to be implemented by the KR920-923 devices.

The following encoding is used for Data Rate (DR), corresponding Configurations and maximum EIRP Output Power (TXPower) in the KR920-923 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6..15	RFU	

Table 50: TX Data rate table

TXPower	Configuration, max EIRP allowed
0	20 dBm
1	14 dBm
2	10 dBm
3	8 dBm
4	5 dBm
5	2 dBm
6	0 dBm
7..15	RFU

Table 51: TX power table

2.8.4 KR920-923 JoinAccept CFList

The KR920-923 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels as defined in Chapter 8.7.2. The newly defined channels are immediately enabled and usable by the end-device for communication.

2.8.5 KR920-923 LinkAdrReq command

The KR920-923 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 52: ChMaskCntl value table

If the ChMaskCntl field value is one of values meaning RFU, the end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.8.6 KR920-923 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table for the regulation of dwell time; less than 4 sec with LBT. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	73	65
1	159	151
2	250	242
3	250	242
4	250	242
5	250	242
6:15	Not defined	

Table 53: KR920-923 maximum payload size

2.8.7 KR920-923 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the [6:7] range are reserved for future use.

RX1DROffset Upstream data rate	0	1	2	3	4	5
	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0

RX1DROffset Upstream data rate	0	1	2	3	4	5
	Downstream data rate in RX1 slot					
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0

1

2 The RX2 receive window uses a fixed frequency and data rate. The default parameters are
3 921.90MHz / DR0 (SF12, 125 kHz)

4 2.8.8 KR920-923 Default Settings

5 The following parameters are recommended values for the KR920-923Mhz band.

6 RECEIVE_DELAY1	1 s
7 RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
8 JOIN_ACCEPT_DELAY1	5 s
9 JOIN_ACCEPT_DELAY2	6 s
10 MAX_FCNT_GAP	16384
11 ADR_ACK_LIMIT	64
12 ADR_ACK_DELAY	32
13 ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

14 If the actual parameter values implemented in the end-device are different from those default
15 values (for example the end-device uses a longer RECEIVE_DELAY1 and
16 RECEIVE_DELAY2 latency), those parameters must be communicated to the network
17 server using an out-of-band channel during the end-device commissioning process. The
18 network server may not accept parameters different from those default values.

19

20

3 Revisions

3.1 Revision 1.0

- Initial revision, the regional parameters were extracted from the LoRaWANV1.0.1 and the Asia/PAC regional cluster definition was added
- The ADR command for the US902-928 physical layer was amended to include ADR MAC command blocks
- Added KR920-923 frequency band support
- Modified EU868 PHY layer power limit from 14dBm EIRP to 14dBm ERP

1 **4 Bibliography**

2 **4.1 References**

- 3
- 4 [LORAWAN] LoRaWAN Specification, V1.0.2, the LoRa Alliance, October 2016.

DRAFT for Review

5 NOTICE OF USE AND DISCLOSURE

Copyright © LoRa Alliance, Inc. (2015). All Rights Reserved.

The information within this document is the property of the LoRa Alliance ("The Alliance") and its use and disclosure are subject to LoRa Alliance Corporate Bylaws, Intellectual Property Rights (IPR) Policy and Membership Agreements.

Elements of LoRa Alliance specifications may be subject to third party intellectual property rights, including without limitation, patent, copyright or trademark rights (such a third party may or may not be a member of LoRa Alliance). The Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

This document and the information contained herein are provided on an "AS IS" basis and THE ALLIANCE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO (A) ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OF THIRD PARTIES (INCLUDING WITHOUT LIMITATION ANY INTELLECTUAL PROPERTY RIGHTS INCLUDING PATENT, COPYRIGHT OR TRADEMARK RIGHTS) OR (B) ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE OR NONINFRINGEMENT.

IN NO EVENT WILL THE ALLIANCE BE LIABLE FOR ANY LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OF DATA, INTERRUPTION OF BUSINESS, OR FOR ANY OTHER DIRECT, INDIRECT, SPECIAL OR EXEMPLARY, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND, IN CONTRACT OR IN TORT, IN CONNECTION WITH THIS DOCUMENT OR THE INFORMATION CONTAINED HEREIN, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The above notice and this paragraph must be included on all copies of this document that are made.

LoRa Alliance, Inc.

2400 Camino Ramon, Suite 375

San Ramon, CA 94583

Note: All Company, brand and product names may be trademarks that are the sole property of their respective owners.