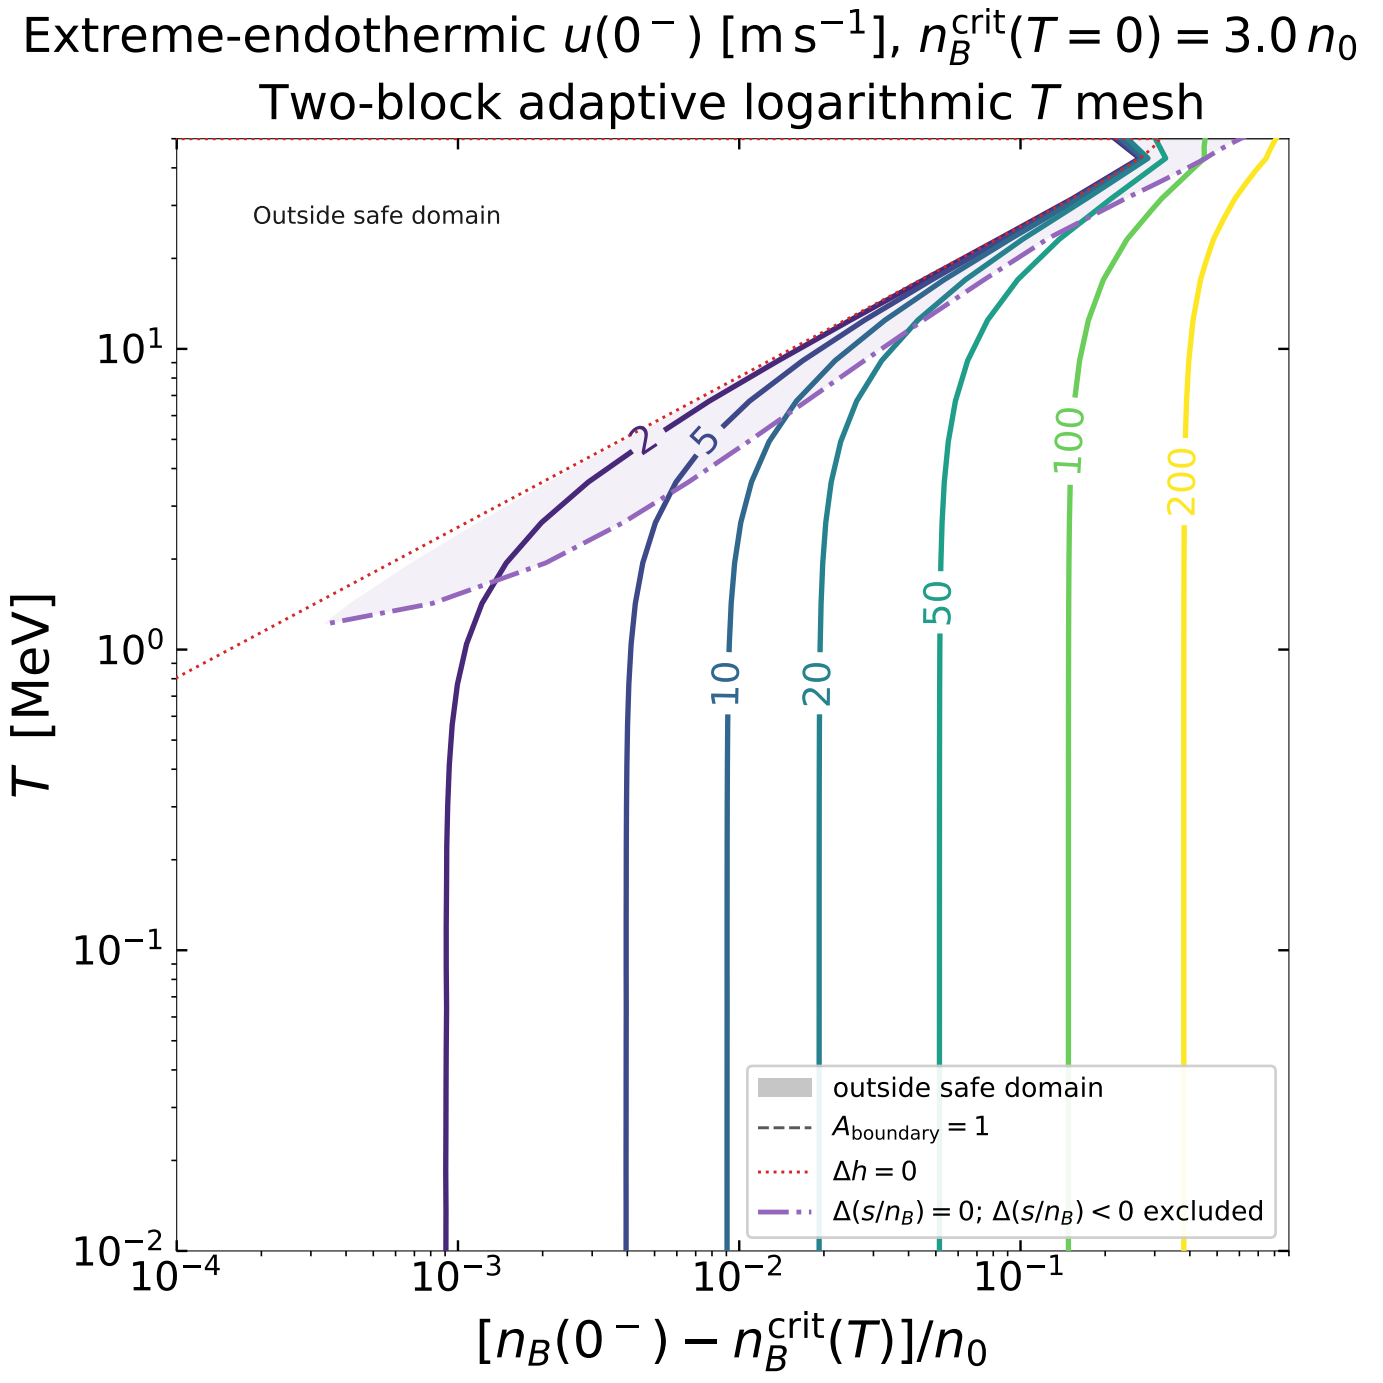
Extreme-endothermic $u(0^-)$ [m s^{-1}], $n_B^{\rm crit}(T=0) = 3.0\,n_0$
Two-block adaptive logarithmic T mesh
Outside safe domain
2
5
10
20
50
100
200
outside safe domain
$A_{\rm boundary} = 1$
$\Delta h = 0$
$\Delta(s/n_B) = 0$; $\Delta(s/n_B) < 0$ excluded
T [MeV]
$[n_B(0^-) - n_B^{\rm crit}(T)]/n_0$