AD146A Datasheet

Zhuhai Jieli Technology Co.,LTD

Version：V1.3

Date：2024.07.22

ZHUHAI JIELI TECHNOLOGY CO., LTD

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

AD146A Features

CPU Core

- 32-bit CPU,the highest frequency is 160MHz

Clock Source

- RC Clock frequency about 16MHz
- LRC(low power RC) clock frequency about 32KHz
- HTC(low drift internal high frequency RC)clock frequency is 5MHz

Digital I/O

- Up to 20 programmable digital I/O pins
- USB DP/DM can be configured to normal I/O pins
- General the IO supports pull-up(10k),pull-down(60k), strong,weak output,input and high impedance
- Up to 8 external interrupt/wake-up source(low power available,can be multiplexed to any I/O, with hardware filter)
- Input channel and Output channel, provide arbitrary IO input and output options for some modules

Digital peripherals

- One Full Speed USB 1.1 PHY
- Two UART Controllers(UART0/1) UART1 supports DMA and Flow Control
- Two SPI Controllers with DMA(SPI0/1) support master mode and slave mode,SPI0 support 4bit,SPI1support 2bit
- One Spi Flash Controller to run code
- One SD host controller
- Two 16-bit Asynchronous Divider Timers
- IIS for digital Audio streaming, supports host and device mode
- One IIC Controller
- Four channel PWM output
- Infrared remote control decoder
- 0.5 watt Class-D audio amplifier output
- Watchdog

Analog Peripherals

- MIC amplifier circuit
- Two analog audio input channels
- 16 channel 10-bit high precision ADC
- 16-bit high precision ADC (mainly as recording)
- 16-bit high precision DAC
- Low voltage protection
- Power on reset

PMU

- Soft off current: <2uA
- Power down current: <30uA
- Music mode: <6mA@HSB 80M
- Recording mode: <11mA@HSB 80M
- LVD range(3bit):1.8V~2.5V, step100mV
- HPVDD range : 2.0V~5.5V
- VBAT range : 2.0V~5.5V
- IOVDD range : 2.0V~3.4V

Temperature

- Operating temperature: -40℃ to +85℃
- Storage temperature: -65℃ to +150℃

Package

- QFN32(4mm*4mm)

Application

- Sound Toy
- Audio player

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

1 Block Diagram

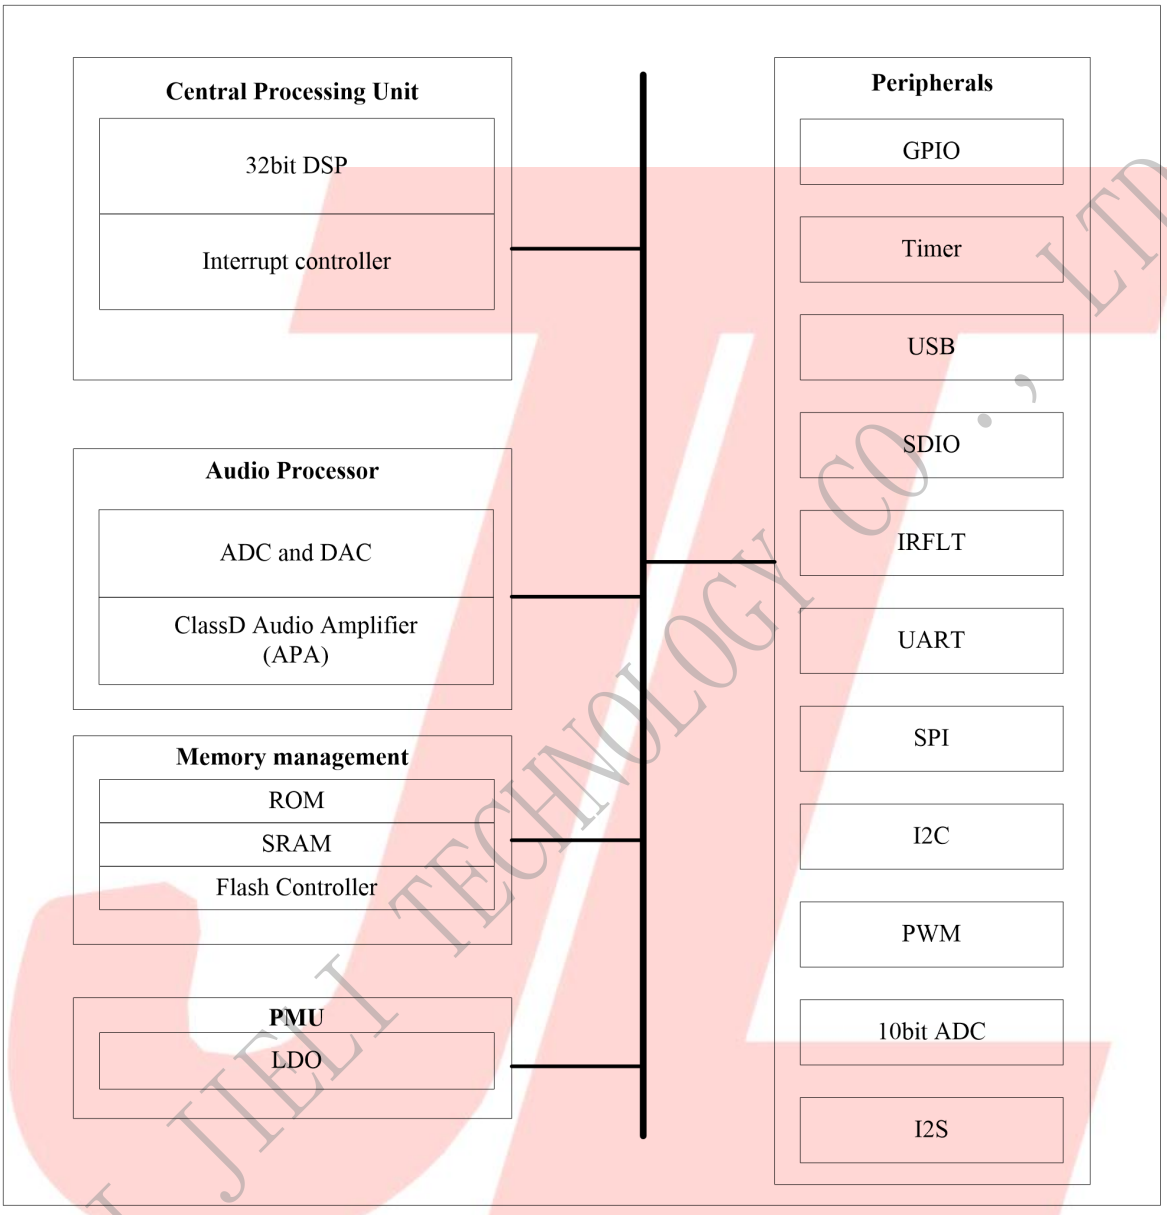

Figure 1-1 AD146A Block Diagram

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2 Pin Definition

2.1 Pin Assignment

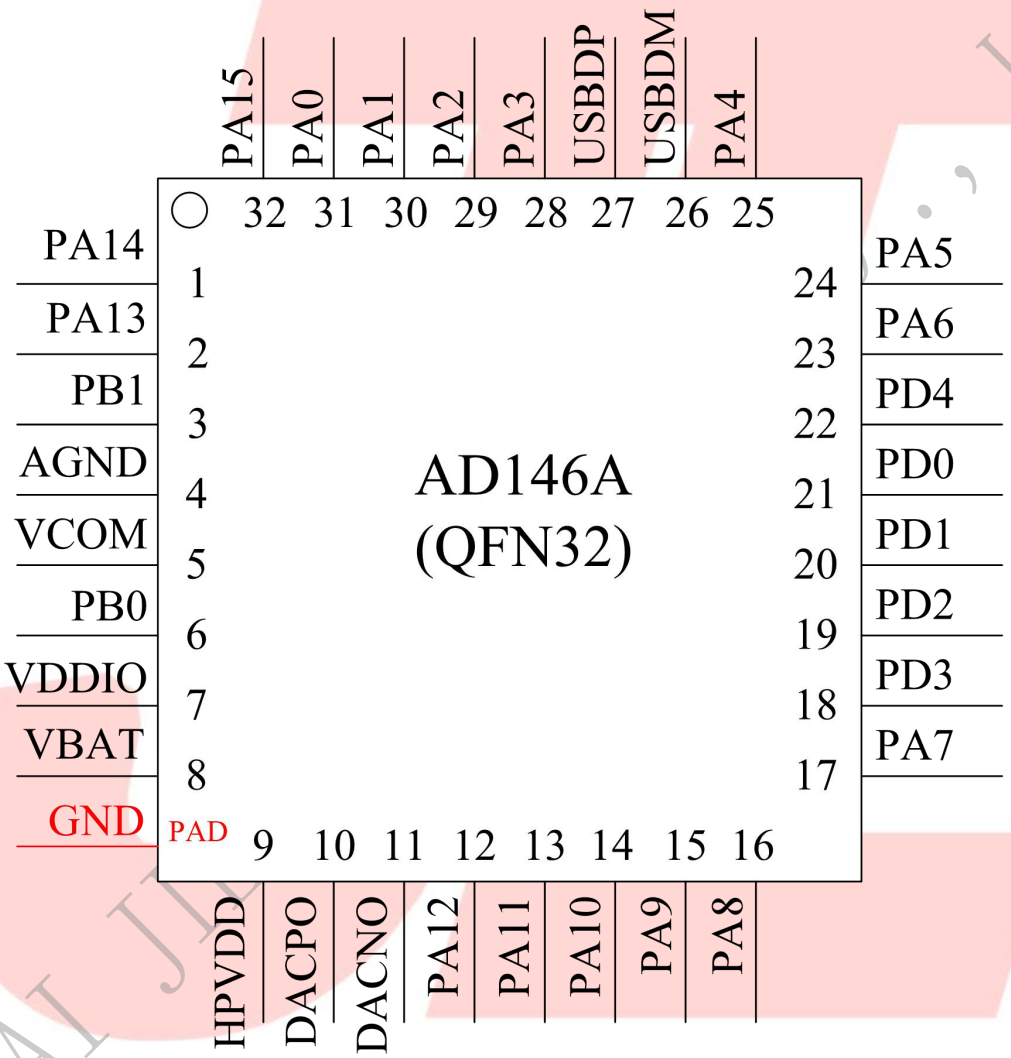

Figure 2-1 AD146A_QFN32 Package Diagram

ZHUHAI JIELI ... LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

2.2 Pin Description

Table 2-1 AD146A_QFN32 Pin Description

PIN NO.	Name	Type	Drive (mA)	Function	Description
1	PA14	I/O	8/64	GPIO	ADC11:ADC Input Channel 11; AUX1:Analog Channel 1 Input;
2	PA13	I/O	8/64	GPIO	ADC10:ADC Input Channel 10; AUX0:Analog Channel 0 Input; MIC_BIAS:Microphone Bias Output; CAP0:Timer0 Capture;
3	PB1	I/O	8/64	GPIO	MIC_IN:MIC Input Channel;
4	AGND	G	/		Analog Ground;
5	VCOM	P	/		Analog Reference;
6	PB0	I/O	8/64	GPIO	ADC13:ADC Input Channel 13; DAC:Analog Audio Output; LVD:Low Voltage Detect；
7	VDDIO	P	/		GPIO Power;
8	VBAT	P	/		Battery Power Supply;
9	HPVDD	P	/		Class-D APA Power Supply;
10	DACPO	O	/		Class-D APA Positive Output;
11	DACNO	O	/		Class-D APA Negative Output;
12	PA12	I/O	8/64	GPIO	I2S_LRCK:Audio Link Word Select; SPI1DOB:SPI1 Data Out(B); SD0CMDB:SD0 Command(B); MCAP3:Motor Timer3 Capture;
13	PA11	I/O	8/64	GPIO	ADC9:ADC Input Channel 9; I2S_SCLK:Audio Link Serial Clock; SPI1CLKB:SPI1 Clock(B); SD0CLKB:SD0 Clock(b); MCAP2:Motor Timer2 Capture;
14	PA10	I/O	8/64	GPIO	ADC8:ADC Input Channel 8; I2S_DAT3:Audio Link Data3; SPI1DIB:SPI1 Data In(B); SD0DATB:SD0 Data(B); TMR1:Timer1 Clock In; MCAP1:Motor Timer1 Capture;

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

15	PA9	I/O	8	GPIO (High Voltage Resistance)	I2S_DAT2:Audio Link Data2; UART1TXB:Uart1 Data Out(B); UART1RXB:Uart1 Data In(B); I2C_SDA(D); CAP1:Timer1 Capture; PWM3:PWM Channel3 Output;
16	PA8	I/O	8	GPIO (High Voltage Resistance)	I2S_DAT1:Audio Link Data1; I2C_SCL(D); TMR0:Timer0 Clock In; PWM2:PWM Channel2 Output; OSCI:Crystal Oscillator Input;
17	PA7	I/O	8	GPIO (High Voltage Resistance)	MCLR; I2S_DAT0:Audio Link Data0;
18	PD3	I/O	8/64	GPIO	SPI0DIA(1):SPI0 Data1 In(A); SFCDIA(1):SFC Data1 In(A);
19	PD2	I/O	8/64	GPIO (pull up)	SPI0CSA:SPI0 Chip Select(A); SFCCSA:SFC Chip Select(A);
20	PD1	I/O	8/64	GPIO	SPI0DOA(0):SPI0 Data0 Out(A); SFCDOA(0):SFC Data0 Out(A);
21	PD0	I/O	8/64	GPIO	SPI0CLKA:SPI0 Clock(A); SFCCLKA:SFC Clock(A);
22	PD4	I/O	8/64	GPIO	Flash Power Gate;
23	PA6	I/O	8/64	GPIO	I2S_MCLK:Audio Link Master Clock; SPI1DIC:SPI1 Data In(C); SD0DATD:SD0 Data(D);
24	PA5	I/O	8/64	GPIO	ADC7:ADC Input Channel 7; SPI0DAT3:SPI0 Data Out3 SPI1DOC:SPI1 Data Out(C); SD0CMDC:SD0 Command(C); SD0CMDD:SD0 Command(D); UART0RXA:Uart0 Data In(A); I2C_SDA(C); PWM1:PWM Channel1 Output;
25	PA4	I/O	8/64	GPIO	ADC6:ADC Input Channel 6; SPI0DAT2:SPI0 Data 2; SPI1CLKC:SPI1 Clock(C); SD0CLKC:SD0 Clock(C); SD0CLKD:SD0 Clock(D); UART0TXA:Uart0 Data Out(A); I2C_SCL(C); TMR2:Timer2 Clock In; PWM0:PWM Channel0 Output;

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

ZHUHAI JIELI TECHNOLOGY CO., LTD

26	USBDM	I/O	10	USB Negative Data (pull down)	ADC5:ADC Input Channel 5; SPI1DOA:SPI1 Data Out(A); SD0DATC:SD0 Data(C); UART1TXA:Uart1 Data Out(A); I2C_SDA(A);
27	USBDP	I/O	10	USB Positive Data (pull down)	ADC4:ADC Input Channel 4; SPI1CLKA:SPI1 Clock(A); UART1RXA:Uart1 Data In(A); I2C_SCL(A);
28	PA3	I/O	8/64	GPIO	ADC3:ADC Input Channel 3; SPI0DIB(1):SPI0 Data1 In(B); SPI1DIA:SPI1 Data In(A); SD0DATA:SD0 Data(A); PWM2L; MCAP0:Motor Timer0 Capture;
29	PA2	I/O	8/64	GPIO	ADC2:ADC Input Channel 2; SPI0DOB(0):SPI0 Data0 Out(B); SD0CMDA:SD0 Command(A); I2C_SDA(B); PWM2H;
30	PA1	I/O	8/64	GPIO	ADC1:ADC Input Channel 1; SPI0CLKB:SPI0 Clock(B); SD0CLKA:SD0 Clock(A); UART0RXB:Uart0 Data In(B); I2C_SCL(B); CAP2:Timer2 Capture;
31	PA0	I/O	8/64	GPIO (pull up)	Long Press Reset; ADC0:ADC Input Channel 0; UART0TXB:Uart0 Data Out(B);
32	PA15	I/O	8/64	GPIO	ADC12:ADC Input Channel 12; MIC_LDO:Microphone Power Output;
PAD		G			Ground;

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3 Electrical Characteristics

3.1 Absolute Maximum Ratings

Table 3-1

Symbol	Parameter	Min	Max	Unit
Tamb	Ambient Temperature	-40	+85	℃
Tstg	Storage temperature	-65	+150	℃
VBAT	Supply Voltage	-0.3	5.5	V
HPVDD	Class D Audio Power Amplifier	-0.3	5.5	V
$V_{VDDIO33}$	3.3V IO Input Voltage	-0.3	3.6	V

Note:The chip can be damaged by any stress in excess of the absolute maximum ratings listed below.

3.2 PMU Characteristics

Table 3-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
VBAT	Voltage Input	2.0	3.7	5.5	V	_
V_{HPVDD}	Voltage Input	2.0	3.7	5.5	V	_
V_{VDDIO}	Voltage output	2.0	3.0	3.4	V	VBAT = 3.7V, 100mA loading
I_{VDDIO}	Loading current	_	_	100	mA	VBAT=3.7V

3.3 IO Input/Output Electrical Logical Characteristics

Table 3-3

IO input characteristics						
Symbol	**Parameter**	**Min**	**Typ**	**Max**	**Unit**	**Test Conditions**
V_{IL}	Low-Level Input Voltage	-0.3	_	0.3* VDDIO	V	VDDIO = 3.3V
V_{IH}	High-Level Input Voltage	0.7* VDDIO	_	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V_{OL}	Low-Level Output Voltage	_	_	0.33	V	VDDIO = 3.3V
V_{OH}	High-Level Output Voltage	2.7	_	_	V	VDDIO = 3.3V

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

3.4 Internal Resistor Characteristics

Table 3-4

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA0~PA6 PA10~PA15 PB0,PB1 PD0~PD4	8mA	64mA	10K	60K	1、PA0&PA7&PD2 default pull up 2、USBDM & USBDP default pull down 3、internal pull-up/pull-down resistance accuracy ±20%
PA7,PA8,PA9 (high voltage I/O)	8mA	_	10K	60K	
USBDP	10mA	_	1.5K	15K	
USBDM	10mA	_	180K	15K	

3.5 Analog DAC(PB0) Characteristics

Table 3-5

Parameter	Min	Typ	Max	Unit	Test Conditions
Frequency Response	20	_	16K	Hz	1KHz/0dB 100kohm loading With A-Weighted Filter
THD+N	_	-65	_	dB	
S/N	_	95	_	dB	
Output Swing	_	0.5	_	Vrms	
Dynamic Range	_	92	_	dB	1KHz/-60dB 100kohm loading With A-Weighted Filter
Output Resistance	_	8.3	_	K	_

3.6 ADC Characteristics

Table 3-6

Parameter	Min	Typ	Max	Unit	Test Conditions
Dynamic Range	_	75	_	dB	1KHz/210mVrms line mode :6dB with cap PGAIS=2
S/N	_	79	_	dB	
THD+N	_	-70	_	dB	

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

4 Package Information

4.1 QFN32

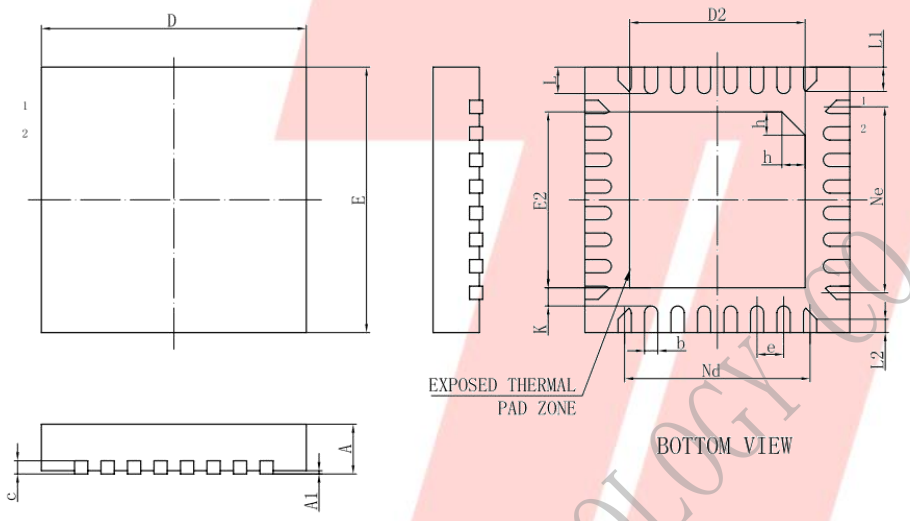

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0	0.02	0.05
b	0.15	0.20	0.25
c	0.18	0.20	0.25
D	3.90	4.00	4.10
D2	2.60	2.65	2.70
e	0.40BSC		
Nd	2.80BSC		
E	3.90	4.00	4.10
E2	2.60	2.65	2.70
Ne	2.80BSC		
K	0.20	–	–
L	0.35	0.40	0.45
L1	0.30	0.35	0.40
L2	0.15	0.20	0.25 △
h	0.30	0.35	0.40
L/F载体尺寸 (MIL)	112*112		

Figure 4-1. AD146A_QFN32 Package

ZHUHAI JIELI TECHNOLOGY CO.,LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

5 Revision History

Date	Revision	Description
2021.03.11	V1.0	Initial Release
2022.08.15	V1.1	Package information modification
2023.03.20	V1.2	Modify Features
2024.07.22	V1.3	Add Block Diagram Update Features modification.

ZHUHAI JIELI TECHNOLOGY CO., LTD

Confidential
The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.