

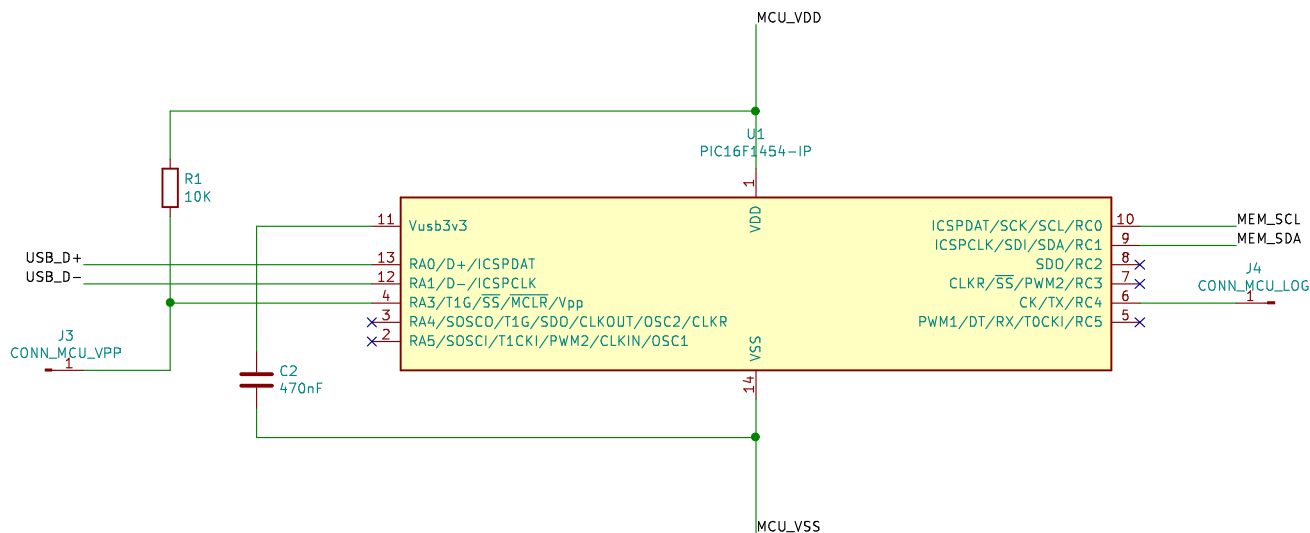



USB provides power to MCU and MEMORY



D-SUB DE-9 MALE  
CONNECTOR  
PIN OUT  
1 =  
2 =  
3 = SDA  
4 = SCL  
5 =  
6 =  
7 = +5V  
8 = GND  
9 =  
CHASSIS =



Justin Lane (atari2600@jigglesoft.co.uk)  
All rights reserved.  
Copyright (C) 2022 Justin Lane  
<https://github.com/JiggleSoft/atari-2600-memory-card-tool>

**JiggleSoft**

Sheet: /  
File: memory-card-usb-interface.sch

**Title: Atari 2600/7800 Memory Card (SaveKey) USB Interface**

Size: A4 Date: 2022-11-18  
KiCad E.D.A. kicad 5.1.5+dfsg1-2build2

Rev: 1.1.2  
Id: 1/1