Unit Limit

SKU:U145


















Description

Unit Limit is a travel switch unit. When the switch lever is pressed and closed by external force, the digital signal interface of the switch unit will be pulled down from a 3.3V high level to a 0V low level, providing a limit trigger signal to the MCU or other main control peripherals. It is suitable for various moving mechanical equipment to control travel and provide terminal limit protection.

Features

- Contact-type travel switch
- Stable performance, reliable and durable, with a mechanical lifespan of up to 400,000 cycles
- Multiple mechanical fixing methods

Includes

- 1 x Unit Limit
- 1 x HY2.0-4P Grove Cable (20cm)

Applications


- Emergency stop control/limit switch
- 3D printer limit switch

Specifications

Specification	Parameter
Switch Lever Length	16mm
Mechanical Life	400,000 cycles
Supply Voltage	DC 5V
Button Output Logic Signal	DC 3.3V
Standby Current	DC 5V@2mA
Operating Current	DC 5V@3mA
Product Size	32.0 x 24.0 x 9.5mm
Product Weight	6.4g
Package Size	138.0 x 93.0 x 10.5mm
Gross Weight	11.5g

Schematics

- Unit Limit Schematics PDF

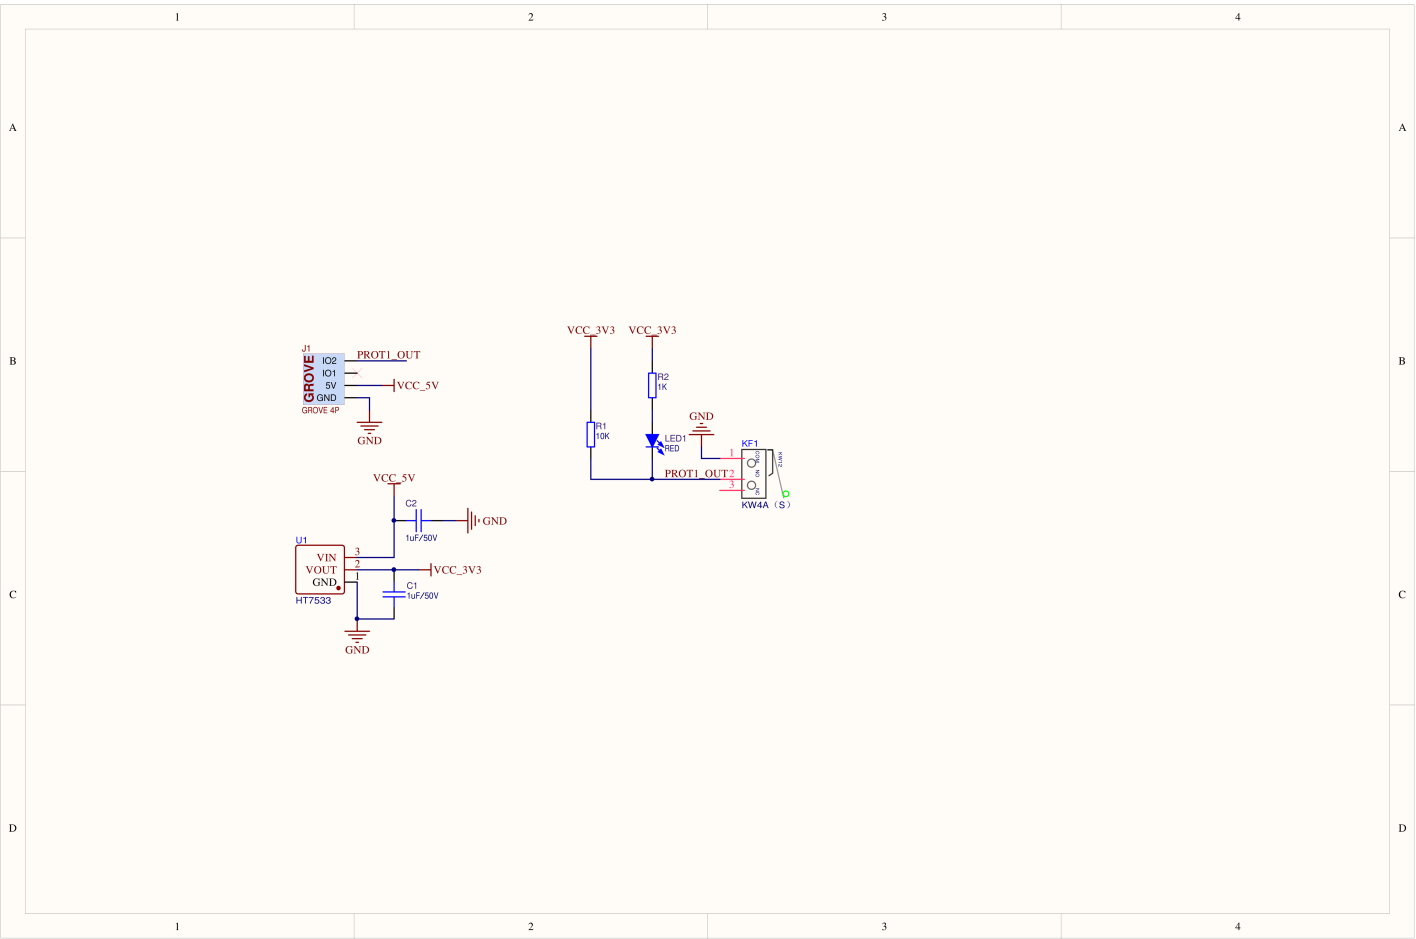


PinMap

Unit Limit

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	NC	Digital Output

Model Size

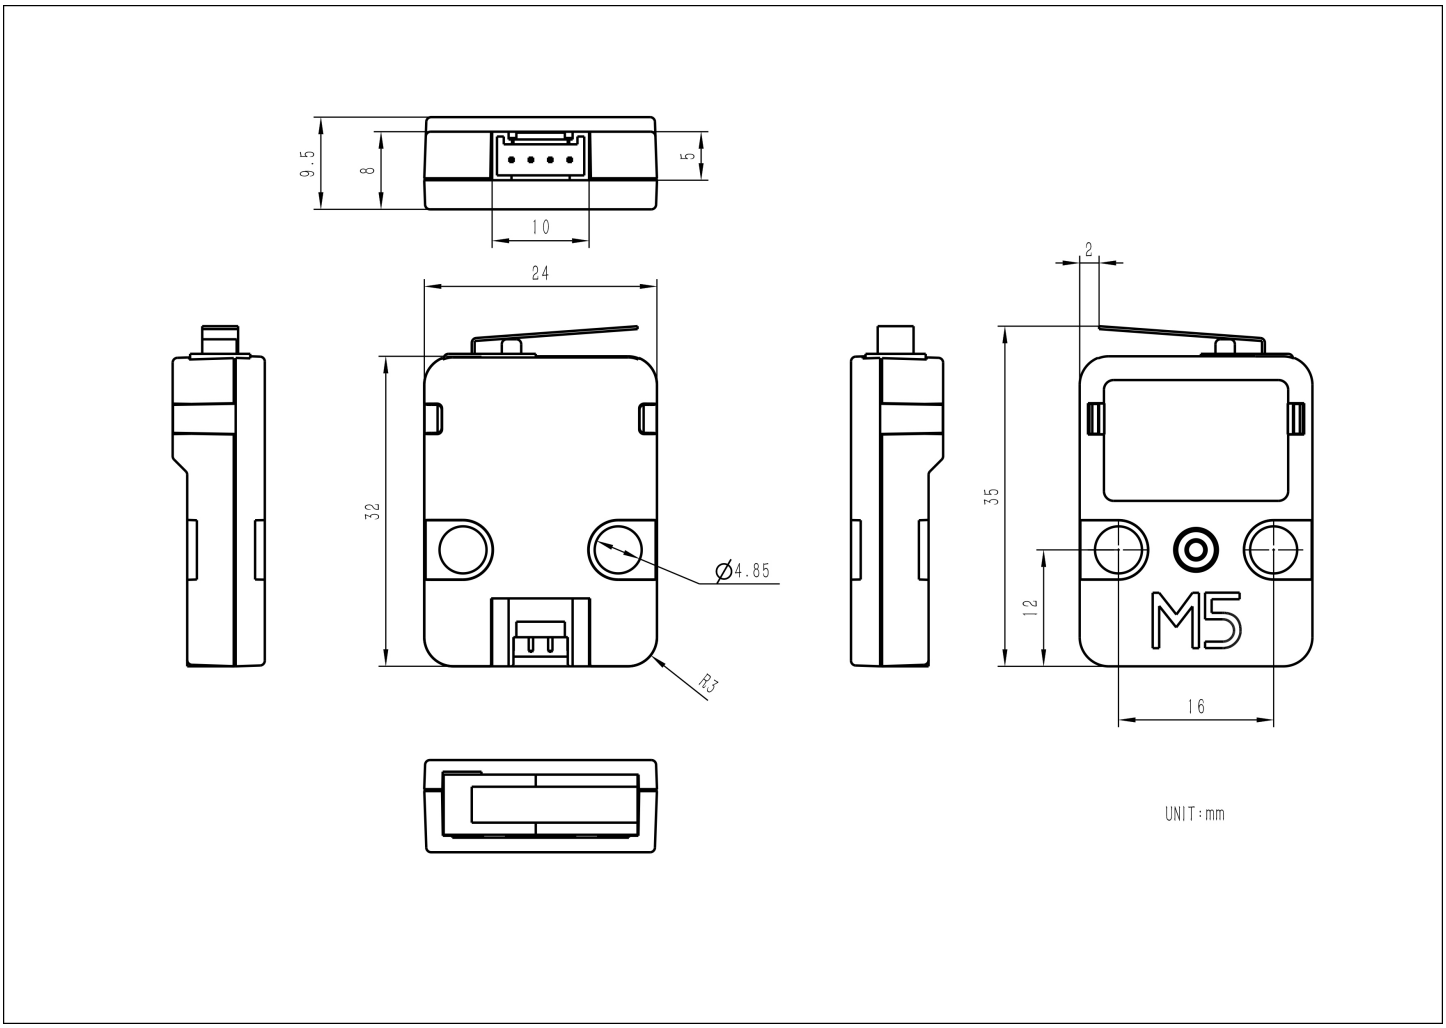

Structure

- Unit Limit Structure Files

Softwares

Arduino

- Unit Limit Test Code

UiFlow1

- Unit Limit UiFlow1 Docs

UiFlow2

- Unit Limit UiFlow2 Docs

EasyLoader

Easyloader	Download	Note
Unit Limit Test Easyloader	download	/

Video