Unit Mini CAN

SKU:U179













Description

Unit Mini CAN is a compact CAN bus communication unit that utilizes the TJA1051T chip, offering excellent high-speed data transmission capabilities and featuring electromagnetic compatibility (EMC) and electrostatic discharge (ESD) protection mechanisms. The unit integrates a DC-DC power chip internally, providing a wide voltage input range and delivering a stable and efficient CAN communication solution. This product is applicable in automotive electronics, industrial automation, and communication systems, offering users a reliable and flexible CAN communication solution.

Features

- Utilizes TJA1051T/3 chip
- High-speed data transmission capability
- Electromagnetic compatibility (EMC) and electrostatic discharge (ESD) protection mechanisms
- HT3.96 terminal wide voltage input range (9-24V)

Includes

- 1 x Unit Mini CAN
- 1 x HY2.0-4P Grove cable (20cm)
- 1 x HT3.96-4P

Applications


- Automotive electronics
- Industrial automation

Specifications

Specification	Parameter
Transmission Rate	Up to 1Mbit/s
Protocol Standard	Complies with ISO 11898-2:2016 and SAE J2284-1 to SAE J2284-5 standards
Wide Voltage Input	HT3.96 terminal: 9-24V Grove: 5V
Load Capacity	DC 5V/Max: 700mA
Operating Current	Avg: DC 5V/4.02mA Avg: DC 24V/2mA
Standby Current	Avg: DC 5V/3.09mA
Operating Temperature	0 ~ 40°C
Product Size	32.0 x 24.0 x 10.2mm
Product Weight	8.0g
Package Size	138.0 x 93.0 x 11.2mm
Gross Weight	13.3g

Schematics

- Unit Mini CAN Schematics PDF

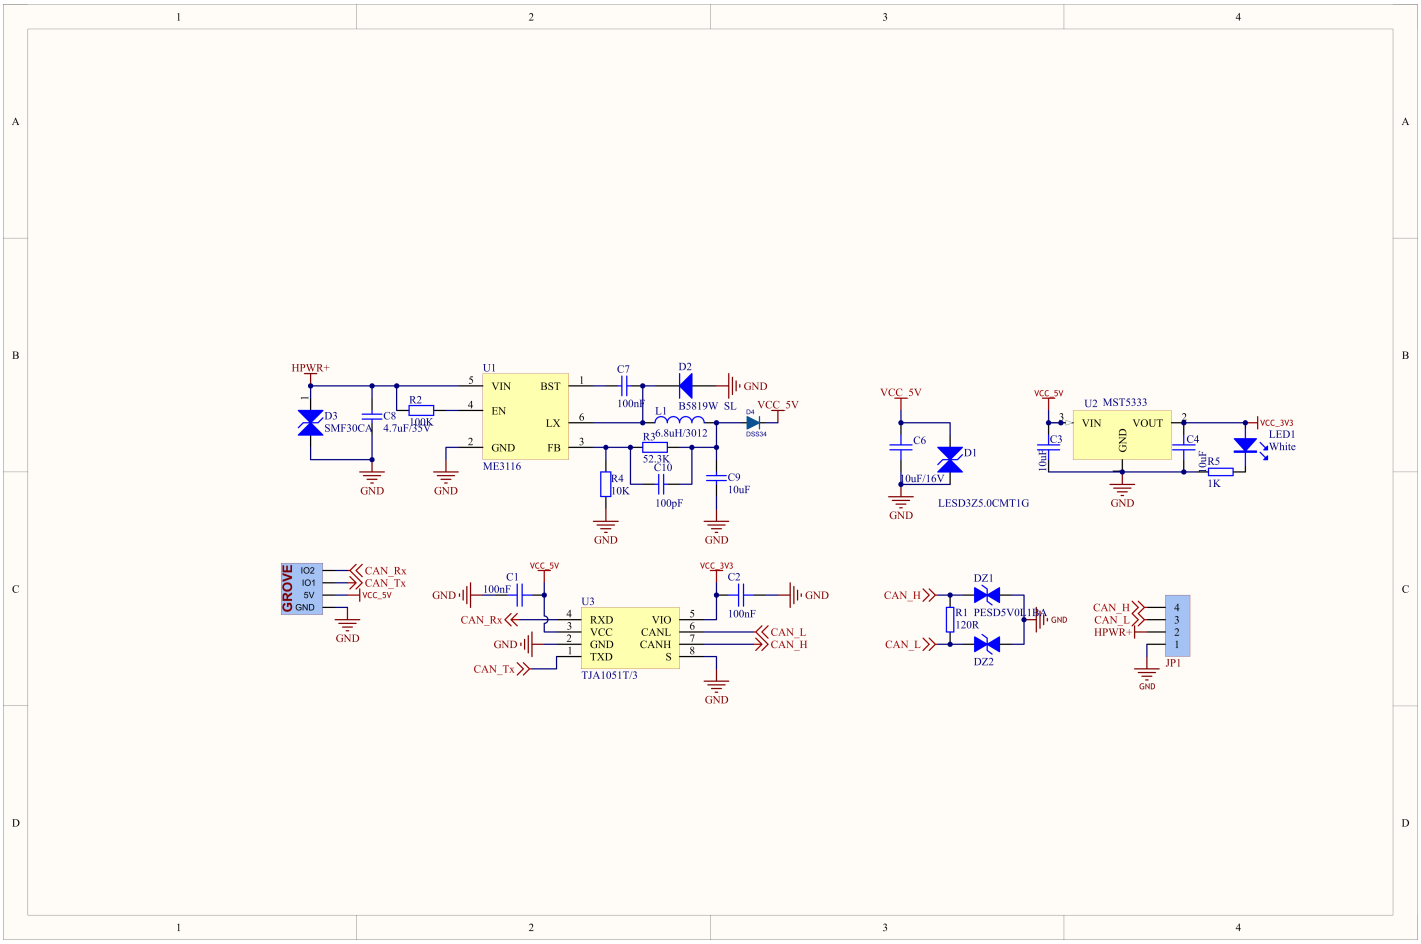


PinMap

Unit Mini CAN

HY2.0-4P	Black	Red	Yellow	White
PORT.C	GND	5V	CAN_TX	CAN_RX

Model Size

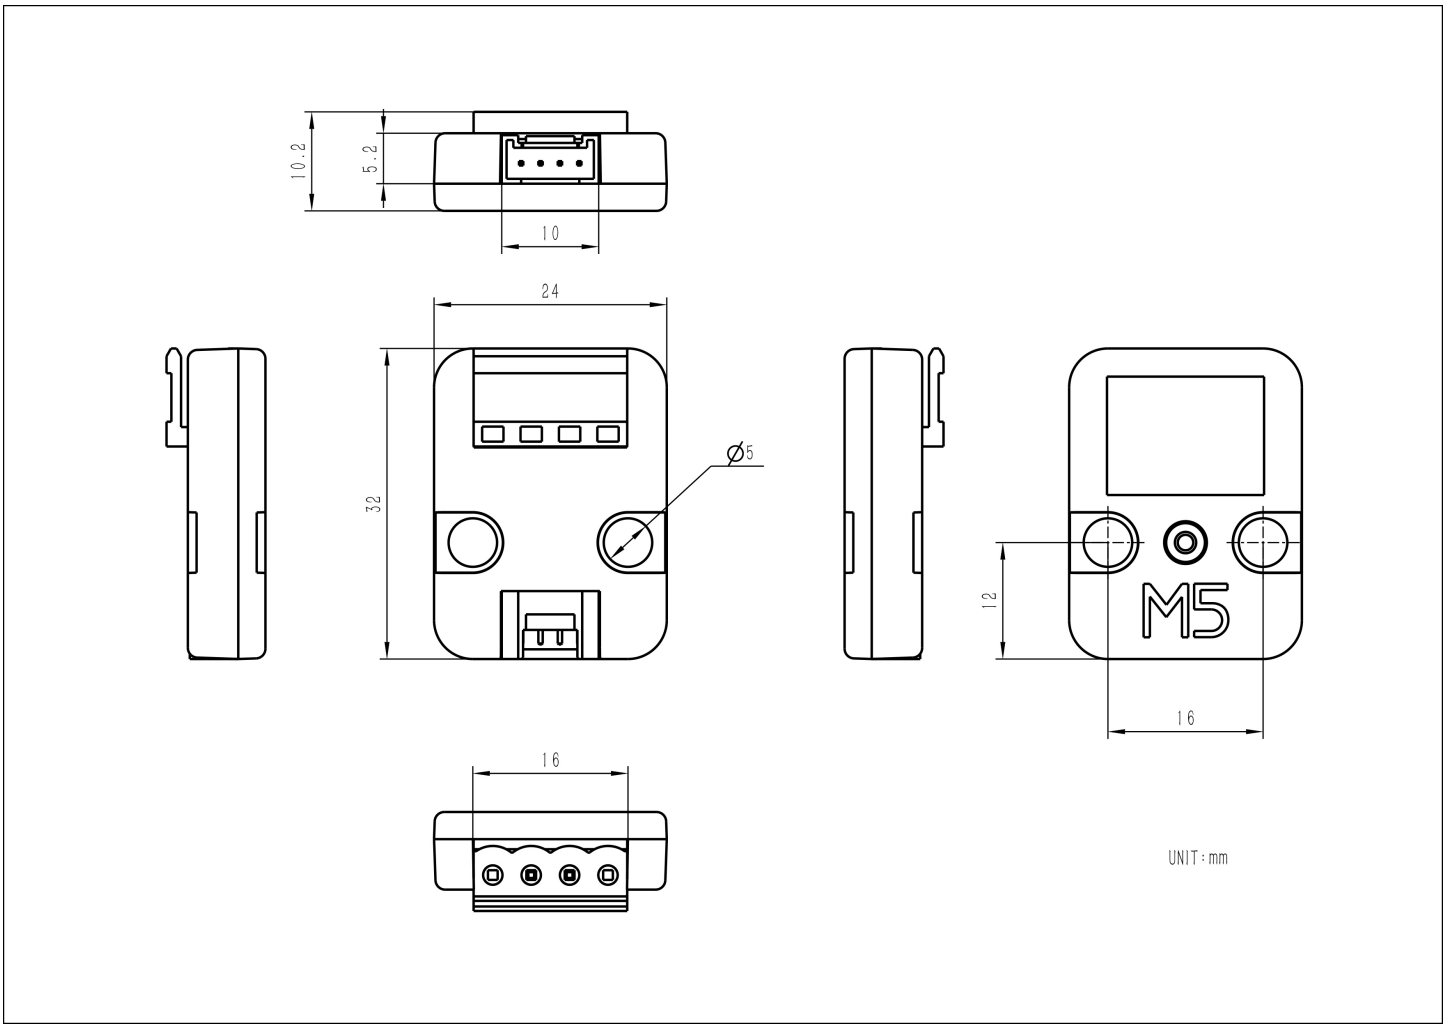

Structure

- Unit Mini CAN Structure Files

Datasheets

- TJA1051T

Softwares

Arduino

- Unit Mini CAN Test Example with M5CoreS3
- Unit Mini CAN Test Example with M5AtomS3
- Unit Mini CAN Test Example with M5Core

UiFlow1

- Unit Mini CAN UiFlow1 Docs

UiFlow2

- Unit Mini CAN UiFlow2 Docs

Product Comparison

Product Compare		
	Unit Mini CAN	**Unit CAN**
CAN Transceiver	TJA1051T/3	CA-IS3050G
Power Isolation	Non-isolated	Isolated
Speed	1Mbps	1Mbps
Input Power	HY2.0-4P Interface DC 5V Power Supply HT3.96-4P Interface DC 9 ~ 24V Power Supply	HY2.0-4P Interface DC 5V Power Supply