Module13.2 RS232F

SKU:M130














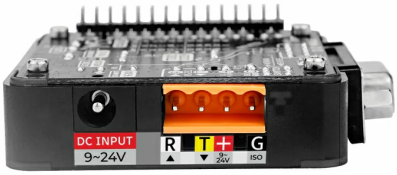







Description

Module13.2 RS232F is an **isolated RS232 serial communication** expansion module. It uses the **TD301D232H serial port conversion chip + female DB9 interface** to achieve interface conversion between RS232 and TTL/CMOS logic level signals. The **F0505S-2WR3** DC/DC power module is used to provide electrical and noise isolation. The **toggle switch** and **rotary switch** allow for switching between straight-

through or crossover DB9 signal lines and serial interface switching, meeting different connection requirements. The module has a built-in **DC power input socket** and corresponding **DC-DC circuit**, which can provide power to the entire device. This product is **suitable for industrial automation, instrumentation, medical equipment, and communication equipment fields**.

Features

- TD301D232H serial port chip, supports full-duplex, fast and reliable
- F0505S-2WR3 electrical and noise isolation
- Toggle switch and rotary switch for line sequence and GPIO switching
- Programming platforms: Arduino, UIFlow (updating)

Includes

- 1 × Module13.2 RS232F
- 1 x HT3.96-4P terminal

Applications


- Industrial automation
- Instrumentation
- Medical equipment
- Communication equipment

Specifications

Specification	Parameter
RS232	TD301D232H
DC-DC Isolation	F0505S-2WR3
Communication Speed	Up to 115200bps
Communication Method	DB9 female interface, supports full-duplex communication, interface conversion between RS232 and TTL/CMOS logic level signals
Operating Temperature	0 ~ 40°C
DC Power Input Voltage	9 ~ 24V
Product Size	63.0 x 54.0 x 19.7mm
Product Weight	32.2g
Package Size	135.0 x 95.0 x 20.5mm
Gross Weight	53.7g

Schematics

- Module13.2 RS232F Schematics PDF

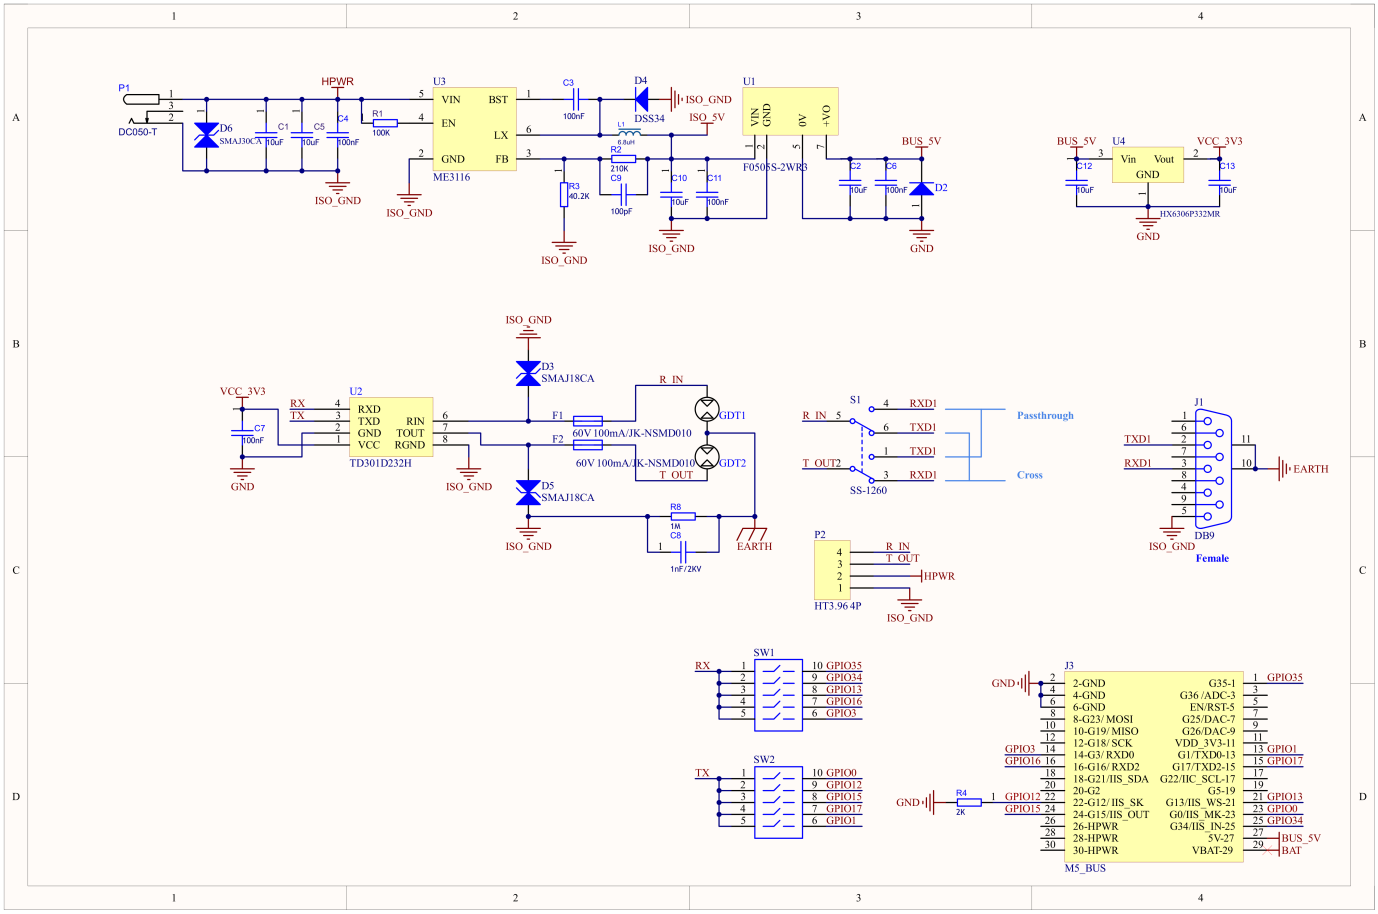

PinMap

M5-Bus


Switch

The pins marked `SW` on the M5-Bus below can be switched via DIP switches to adapt to different main controllers.

PIN	LEFT	RIGHT	PIN
GND	1	2	RS232_TX (SW)
GND	3	4	
GND	5	6	
	7	8	
	9	10	
	11	12	
RS232_TX (SW)	13	14	RS232_RX (SW)
RS232_TX (SW)	15	16	RS232_RX(SW)
	17	18	
	19	20	
RS232_RX (SW)	21	22	RS232_TX (SW)
RS232_RX (SW)	23	24	RS232_RX (SW)
NC	25	26	RS232_TX (SW)
NC	27	28	5V
NC	29	30	

Model Size

- Module13.2 RS232F Model Size PDF

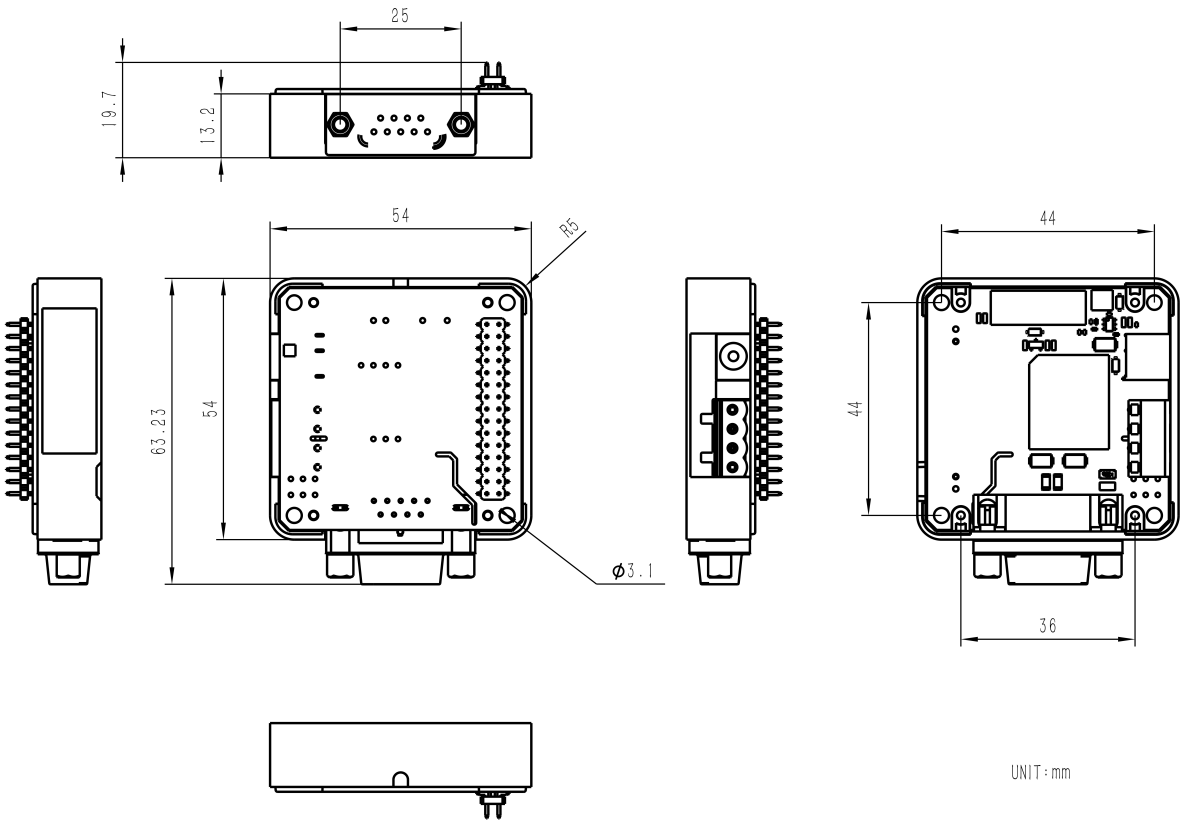

Datasheets

- F0505S-2WR3
- TD301D232H

Softwares

Arduino

- Module13.2 RS232F Example with M5Core

UiFlow1

- Module13.2 RS232F UiFlow1 Docs

UiFlow2

- Module13.2 RS232F UiFlow2 Docs

Video