Unit OP180

SKU:U058
















Description

Unit OP180 is a 180° non-contact photoelectric limit switch. The unit has an infrared transmitter and receiver located on opposite sides. During normal operation, the transmitter continuously emits an infrared signal to the receiver. When an object passes between them and blocks the infrared signal, the output terminal will generate an action signal to detect the object's passage. It is commonly used in mechanical control systems as a safety interlock or a photoelectric counter.

Features

- Angle: 180°
- Infrared limit switch

Includes

- 1 x Unit OP180
- 1 x HY2.0-4P Grove Cable (20cm)


Applications

- Automatic doors
- Automated mechanical control

Specifications

Specification	Parameter
Operating Temperature	0 ~ 40°C
Product Size	36.0 x 24.0 x 8.8mm
Product Weight	5.1g
Package Size	138.0 x 93.0 x 9.8mm
Gross Weight	10.0g

Schematics

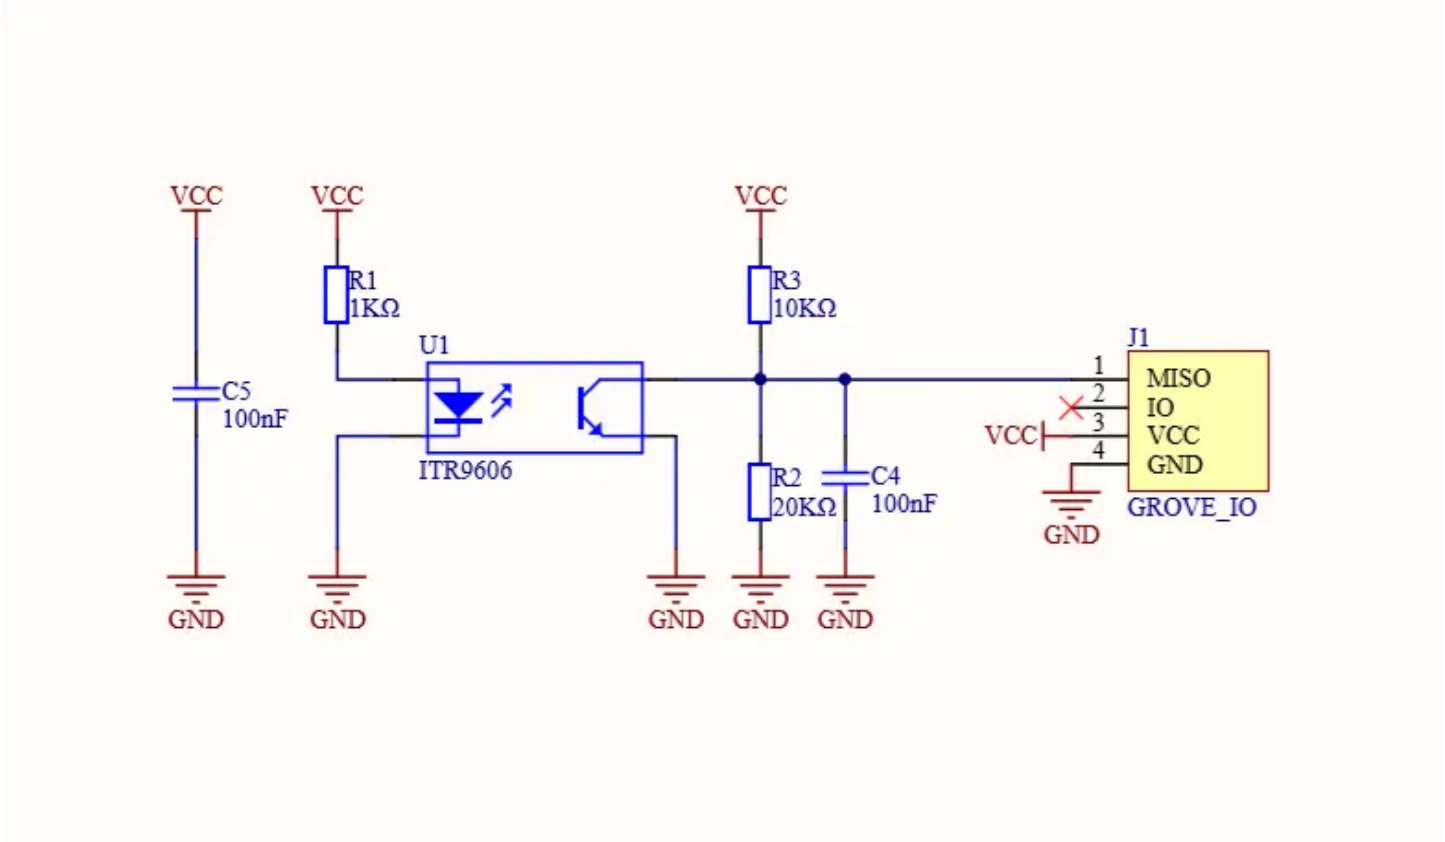


PinMap

Unit OP180

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	NC	Digital Output

Model Size

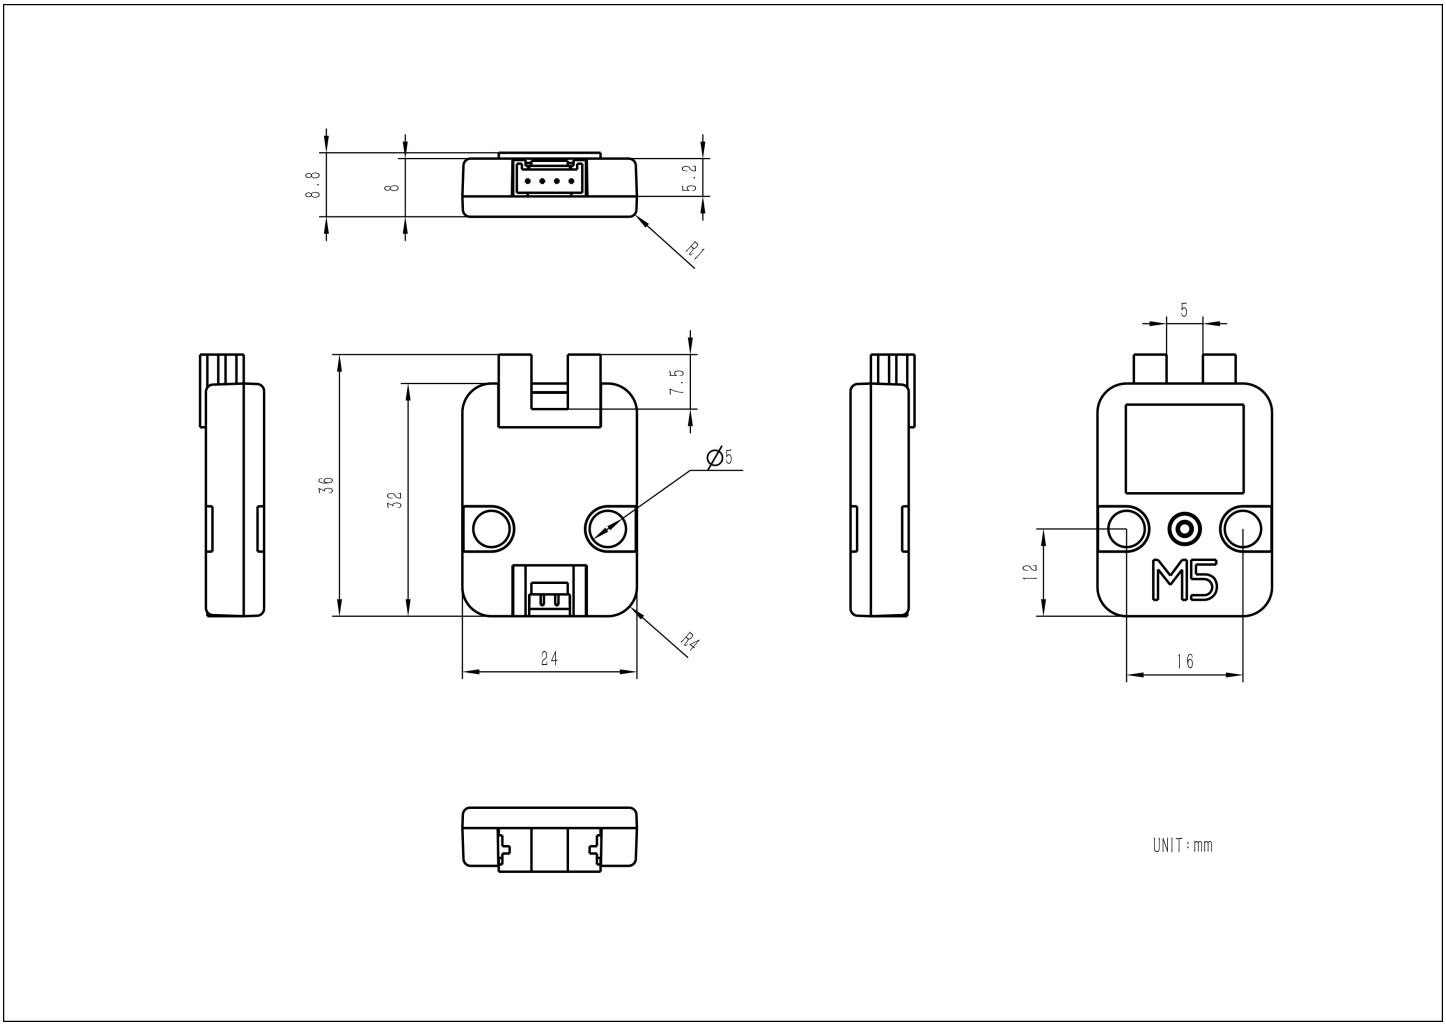

Structure

- Unit OP180 Structure Files

Softwares

Arduino

- Unit OP180 Test Example

UiFlow2

- Unit OP180 UiFlow2 Docs

EasyLoader

Easyloader	Download	Note
Unit OP180 Test Easyloader	download	/

Video

- Unit OP.180 Example

OP90_UNIT.MP4