Atom QRCode v1.1

SKU: K041-B















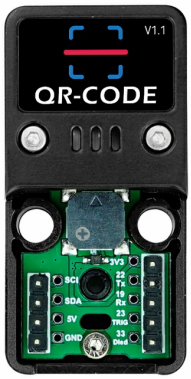



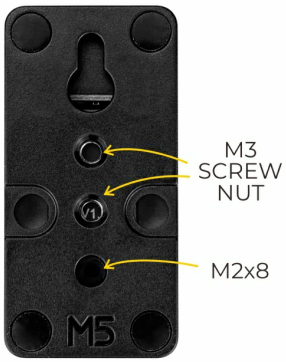

Description

Atom QRCode v1.1 is a module kit for identifying and reading 1D/2D barcodes, including the Atom-Lite host. It supports 6 types of 2D codes and 19 types of 1D codes. The built-in LED illumination allows easy identification even in dark environments, and the green LED facilitates focusing and aiming. With high-resolution CMOS imaging, the effective recognition accuracy reaches 5mil. It also features multiple reading modes, allowing you to adjust between automatic continuous triggering or manual triggering as needed. The module comes with a buzzer that provides different sound prompts for various states. Additionally, the module supports adding custom prefixes

and suffixes to data, defining multi-country keyboards, data editing, and many other functions. The module uses TTL for communication, making it easy to transmit data via serial port, whether using Arduino or UiFlow programming. You can use the built-in ESP32 in Atom-Lite to send scanned data to a receiving end for processing via wired or wireless methods.

Features

- Based on ESP32, supports Wi-Fi
- Compatible with Atom-Matrix/Atom-Lite
- Built-in illumination and focus LED
- UART/TTL communication
- Manual and automatic scanning modes
- Light and sound reminders
- Multiple output formats
- Data pre-editing and hiding
- Rich custom commands
- Supports raw data/GBK/Unicode encoding
- Supports Arduino, UiFlow

Includes

- 1 x Atom-Lite
- 1 x Atomic QRCode v1.1 Base
- 1 x M2 Hex Key
- 1 x M2*8 Cup Head Screw
- 1 x USB Type-C Cable (20cm)

Applications

- Cashier scanning
- Barcode entry
- Warehouse inventory

Specifications

Specification	Parameters
Sensor	640x480 CMOS
Illumination	White LED
Focus Aiming	Green LED
2D Code Types	QR Code, Micro QR, Data Matrix, PDF417, Micro PDF417, Aztec
1D Code Types	EAN, UPC, Code 39, Code 93, Code 128, UCC/EAN 128, Codabar, Interleaved 2 of 5, ITF-6, ITF-14, ISBN, ISSN, MSI-Plessey, GS1 Databar, Code 11, Industrial 25, Standard 2 of 5, Plessey, Matrix 2 of 5
Recognition Accuracy	≥5mil
Reading Range	EAN-13: 50-200mm (13mil), Code39: 40-90mm (5mil 10 bytes), QR Code: 25-240mm (20mil 16 bytes), Data Matrix: 50-90mm (10mil 20 bytes), PDF 417: 30-130mm (6.67mil 7 bytes)
Contrast	≥25%
Scanning Angle	Rotation 360°, Tilt ±55°, Skew ±55°
Field of View	Horizontal 34°, Vertical 28°
Communication Interface	UART/TTL
Voltage/Current	DC 3.3V/170mA, Standby 10mA
Housing Material	Plastic (PC)
Product Size	48 × 24 × 18mm
Product Weight	17.0g
Package Size	55 × 55 × 20mm
Gross Weight	37.0g

Learn


Scanning Notes

To switch scanning types, refer to the QRCode Command Manual for the command QR codes to activate the corresponding configurations.

PinMap

PIN	LEFT	RIGHT	PIN
		1	3V3
PORT.A	2	3	UART_RX
PORT.A	4	5	UART_TX
5V	6	7	RS485_RX
GND	8	9	RS485_TX

Model Size

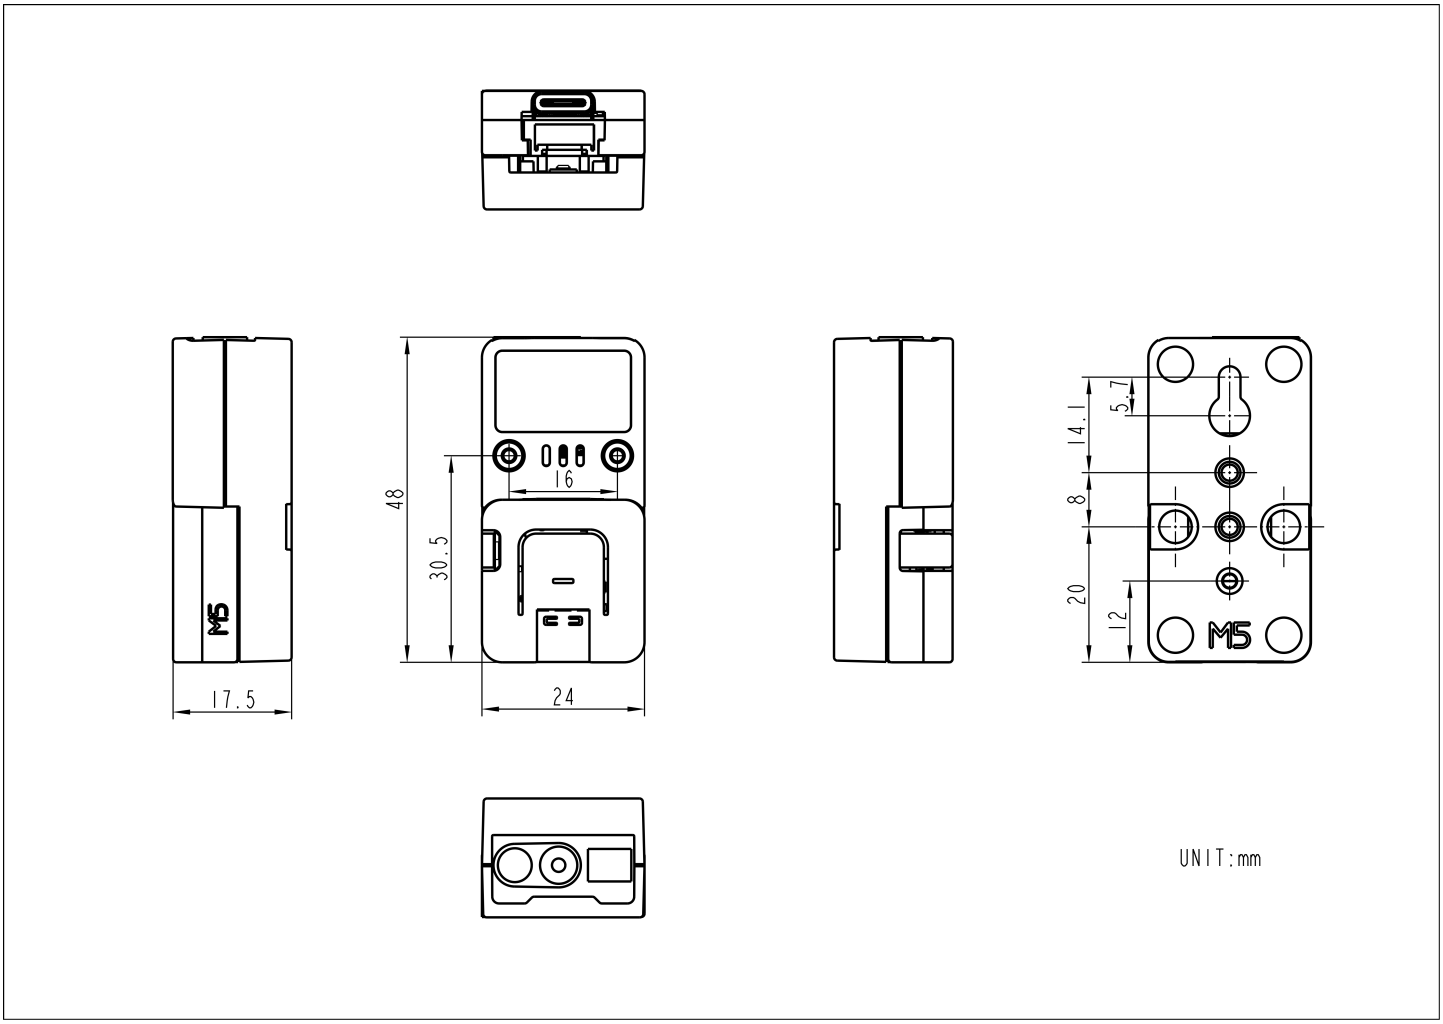

Datasheets

- QR Module Serial Control Command List
- User Manual of QR Code Command


Softwares

Arduino


- Atom QRCode Button Control Example
- Atom QRCode UART Control Example

UiFlow1

- Atom QRCode UART Control Example

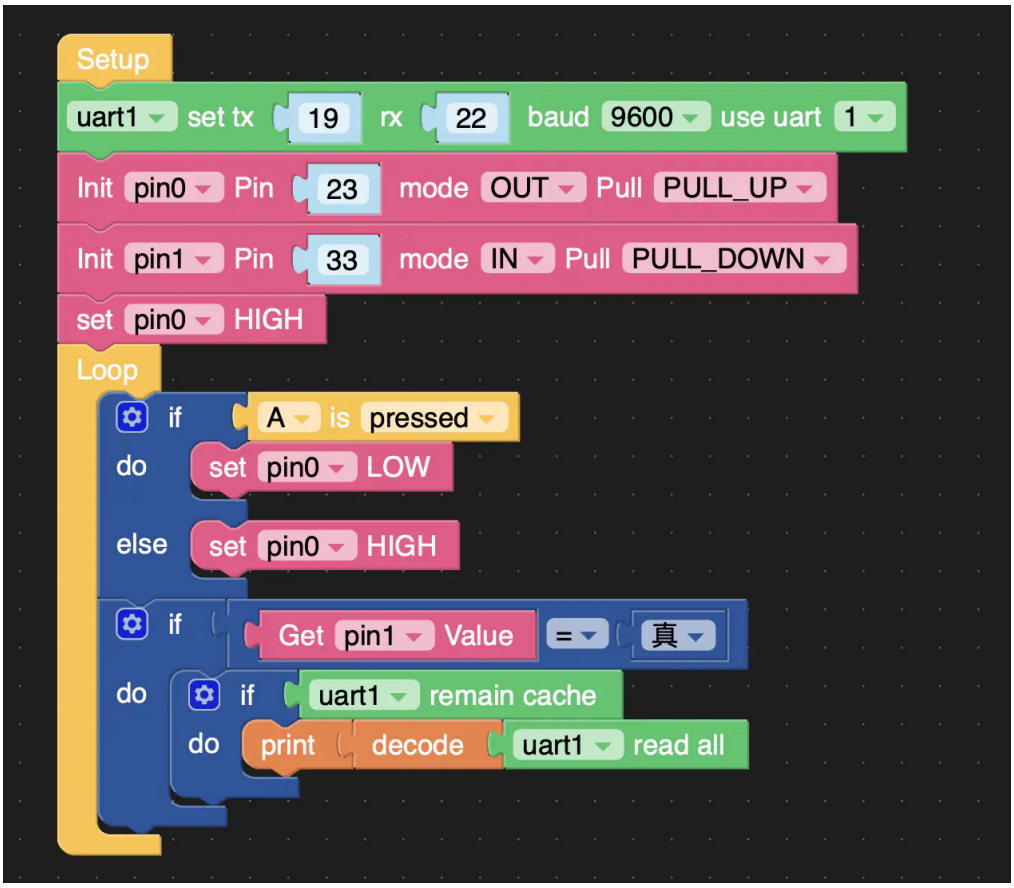

- Atom QRCode Button Control Example

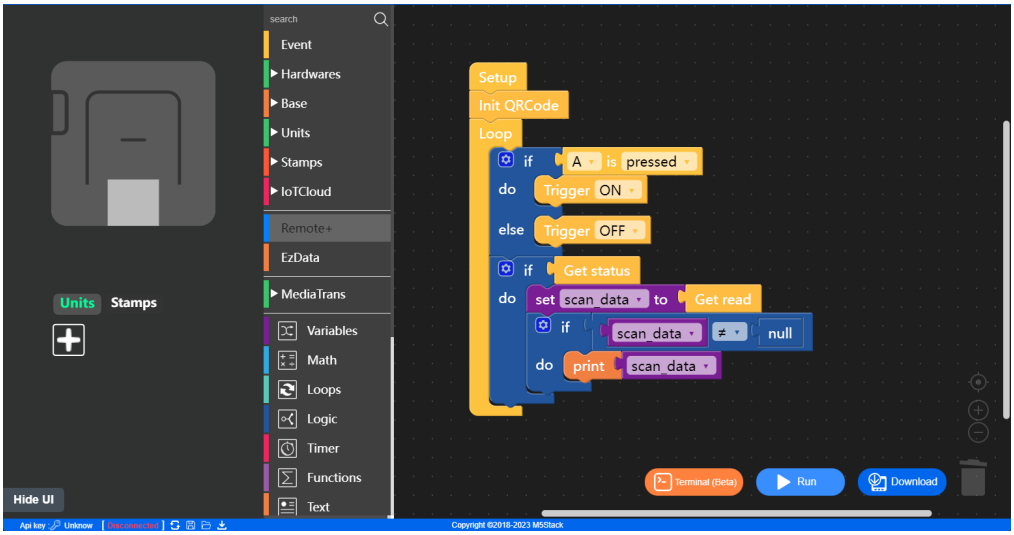

EasyLoader

Easyloader	Download Link	Notes
Atom QRCode Easyloader	download	/

Video

Atomic_QR.mp4