Unit Ultrasonic

SKU:U098




















Description

Unit Ultrasonic is an ultrasonic distance measurement sensor unit with a separate transmitter and receiver design. The ultrasonic probe operates at a frequency of 40kHz, with a directional angle of ±20° and an accuracy up to 1mm. It is powered by the RCWL-9600 ultrasonic ranging chip, which calculates the measurements internally, and the results can be directly obtained via the I2C interface (0x57). The effective measuring distance is 30 ~ 150cm.

Features

- Separate transmitter and receiver
- Effective distance 30-150cm
- Wide directional angle range
- I2C communication with direct result output

Includes

- 1 x Unit Ultrasonic
- 1 x PORT Cable (20cm)

Applications

- Distance measurement
- Obstacle avoidance

Specifications


Specification	Parameter
Ranging Chip	RCWL-9600
Communication	I2C @0x57
Measuring Range	30 ~ 150cm
Transmit SPL	108dB
Receive Sensitivity	68dB
Blind Zone	20mm
Accuracy	1mm
Product Size	56.0 x 24.0 x 12.0mm
Product Weight	9.0g
Package Size	60.0 x 55.0 x 16.0mm
Gross Weight	23.0g

PinMap

HY2.0-4P

HY2.0-4P	Black	Red	Yellow	White
PORT.A	GND	5V	SDA	SCL

Model Size

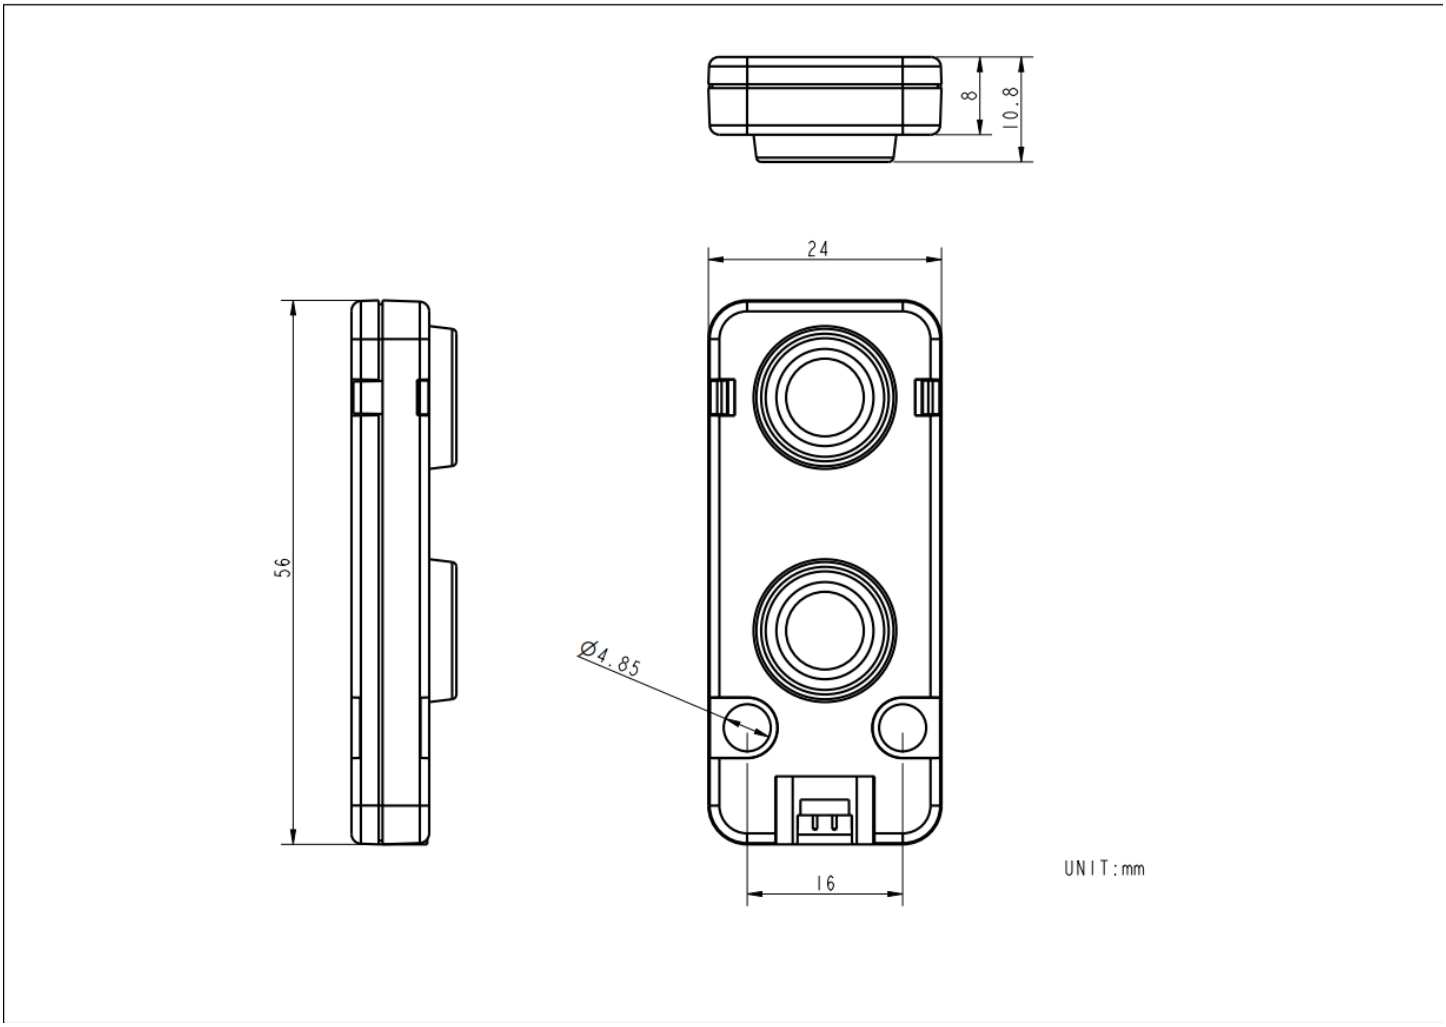

Datasheets

- Ceramic Ultrasonic Sensor TC40-10T/R

Softwares

Arduino

- Unit Ultrasonic-I2C Test Example with M5Atom
- Unit Ultrasonic-I2C Test Example with M5Core
- Unit Ultrasonic-I2C Test Example with M5Core2
- Unit Ultrasonic-I2C Test Example with M5StickC
- Unit Ultrasonic-I2C Test Example with M5StickCPlus

UiFlow1

- Unit Ultrasonic UiFlow1 Docs

UiFlow2

- Unit Ultrasonic UiFlow2 Docs

EasyLoader

Easyloader	Download	Note
Unit Ultrasonic Test Easyloader	download	/

Video

- Tutorial

ULTRASONIC.mp4

- UiFlow2 Unit Ultrasonic