
Unit Trace

SKU:A048





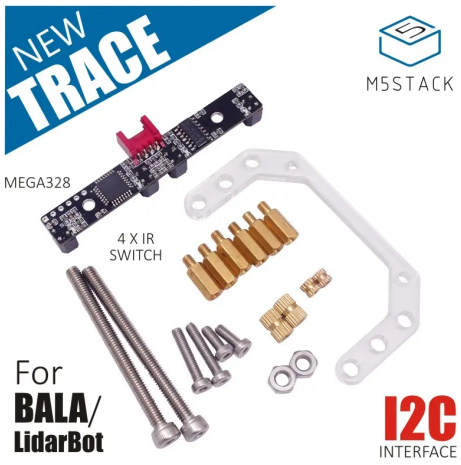

Description

Unit Trace is an infrared line-following Unit. It is equipped with 4 sets of infrared LED lights and infrared-sensitive phototransistors. While the robot is moving, it can detect the ground background color in real-time and convert it into a digital signal output to the microcontroller. Through programming, it can correct the route and achieve the line-following function. This Unit communicates with the M5Core via the PORT A interface, with an I2C address of **0x5A**.

Features

- Working range: Reflective surface distance from the photoelectric surface is less than 11mm
- HY2.0-4P interface, supports UIFlow and Arduino
- 2 x LEGO compatible holes

Includes

- 1 x Unit Trace


Applications

- Line-following robots

Specifications

Specification	Parameter
Net Weight	32g
Gross Weight	34g
Product Size	70 x 16 x 18mm
Package Size	200 x 100 x 10mm

Schematics

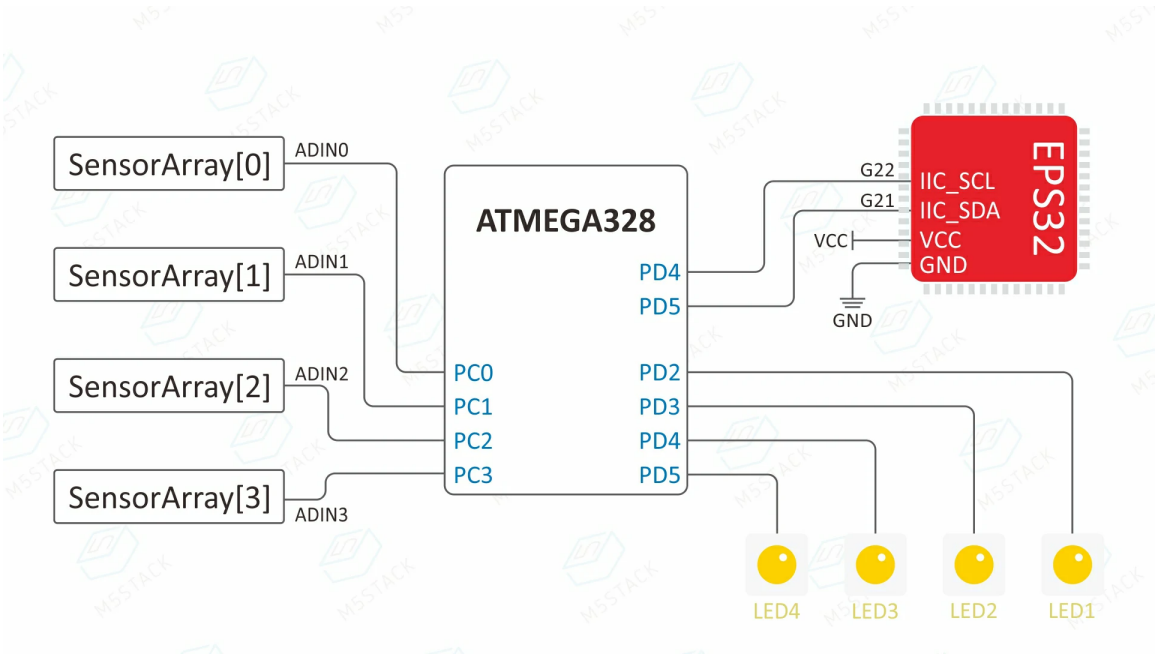


PinMap

Unit Trace

HY2.0-4P	Black	Red	Yellow	White
PORT.A	GND	5V	SDA	SCL


Mega328 ISP** Download Interface Pin Definition

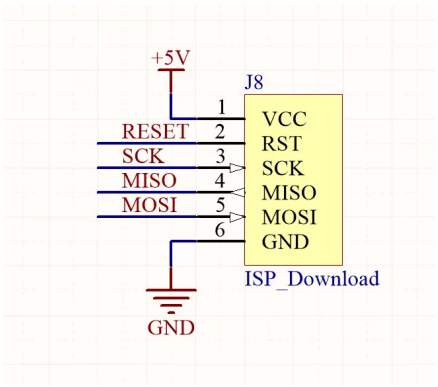

Softwares


Arduino

- Trace Test Example

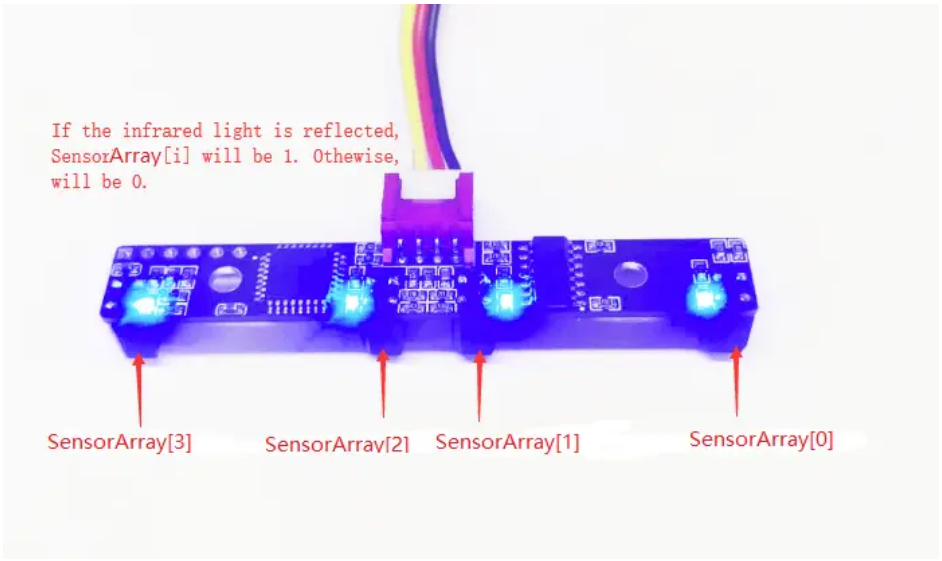

UiFlow1

- Trace Test Example

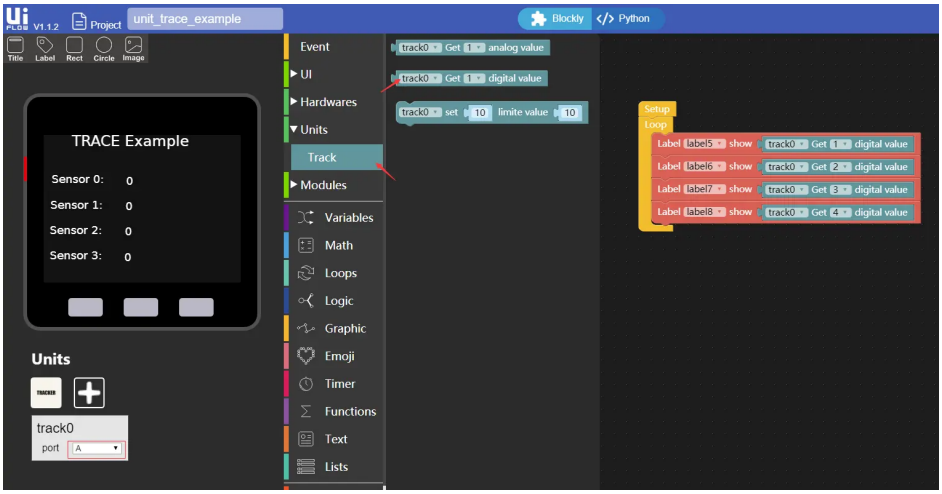

Internal Firmware

- MEGA328 Internal Firmware

Easyloader

Easyloader	Download Link	Remarks
Trace Test Easyloader	download	/