Hat Servo


SKU:U075









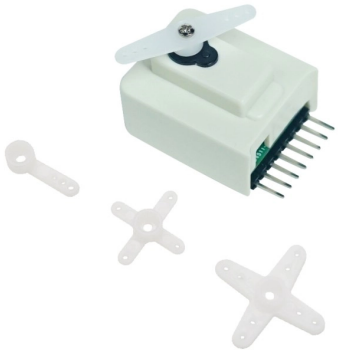





Description

Hat Servo is a servo motor module designed for use with M5StickC. The servo model is ES9251II, with a movement angle of 145° ± 10°. It uses PWM control to adjust the rotation angle, with the signal port being G26.

Features

- Rotation speed: 0.09 sec/60°
- Gear material: Plastic
- Torque: 0.25 Kgf.cm
- Torque: 3.5 oz.in
- Operating voltage: 5.0V ± 0.2V

Includes

- 1 x Hat Servo
- 1 x Servo accessory kit


Applications

- Simulated Pointer
- Angle Control
- Servo Systems


Specifications

Specification	Parameter
No-Load Speed	0.12s/60°
No-Load Current	Maximum 65mA
Product Size	35.0 x 24.0 x 22.0mm
Product Weight	10.0g
Package Size	136.0 x 92.0 x 22.0mm
Gross Weight	19.0g

Schematics

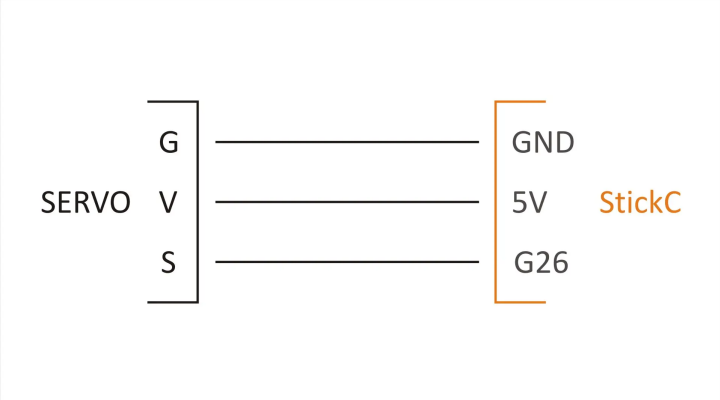

- Hat Servo Overall Design Block Diagram

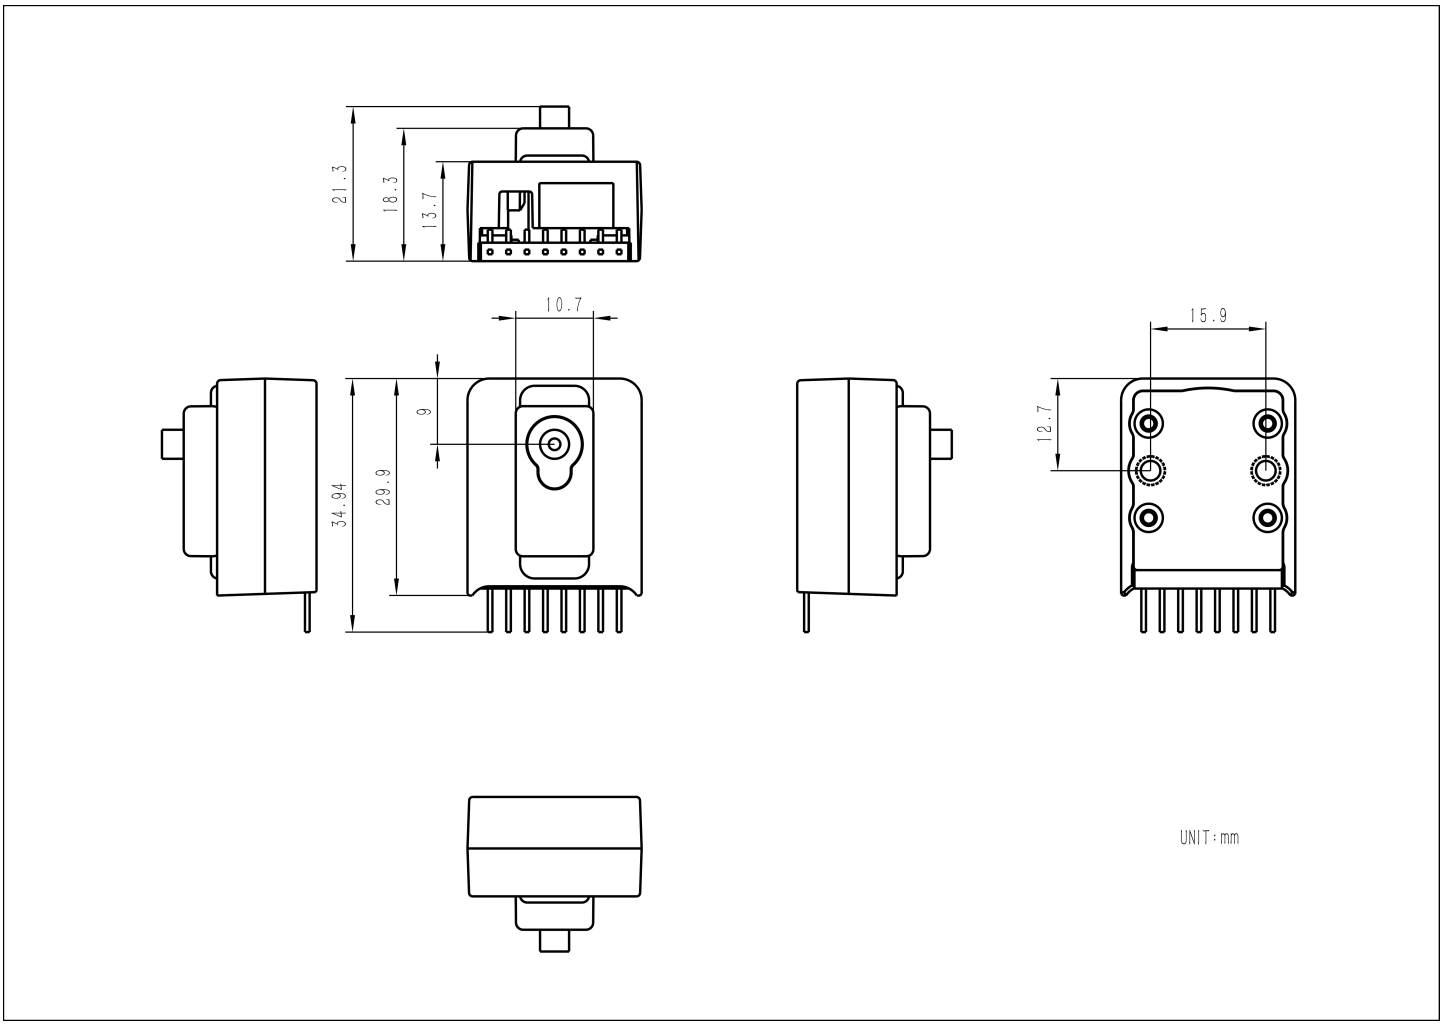

Softwares

Arduino

- Hat Servo Example

UiFlow1

- Hat Servo UiFlow1 Docs

UiFlow2

- Hat Servo UiFlow2 Docs

Easyloader

Easyloader	Download Link	Note
Hat Servo Easyloader	download	/

Video

SERVO-HAT.mp4