
Module13.2 2Relay

SKU:M124





















Description

Module13.2 2Relay is a dual-channel AC relay module with a built-in STM32F030 main control chip, using I2C bus communication. It integrates a dual-channel AC relay module, supporting up to AC 250V@5A circuit switching. It is suitable for applications such as electrical load and solenoid valve control.

Features

- STM32F030F4
- I2C communication (address: 0x26)
- 2 x Relay modules
- Power input (supports AC/DC input)
- Programming platform: Arduino/UIFLOW

Includes

- 1 x Module13.2 2Relay
- 2 x HT3.96-2P terminals

Applications


- On/Off control
- Solenoid valve control
- DC load control on/off
- Remote IoT switch

Specifications

Specification	Parameter
MCU	STM32F030F4P6
Actuator	2-channel relay
Electrical characteristics	AC/DC
Contact material	AgSnO2
CH maximum power	250VAC @ 5A
Contact resistance	≤100mΩ
Product Size	54.0 x 54.0 x 19.7mm
Product Weight	33.5g
Package Size	95.0 x 66.0 x 26.0mm
Gross Weight	53.6g

Schematics

- Module13.2 2Relay Schematics PDF

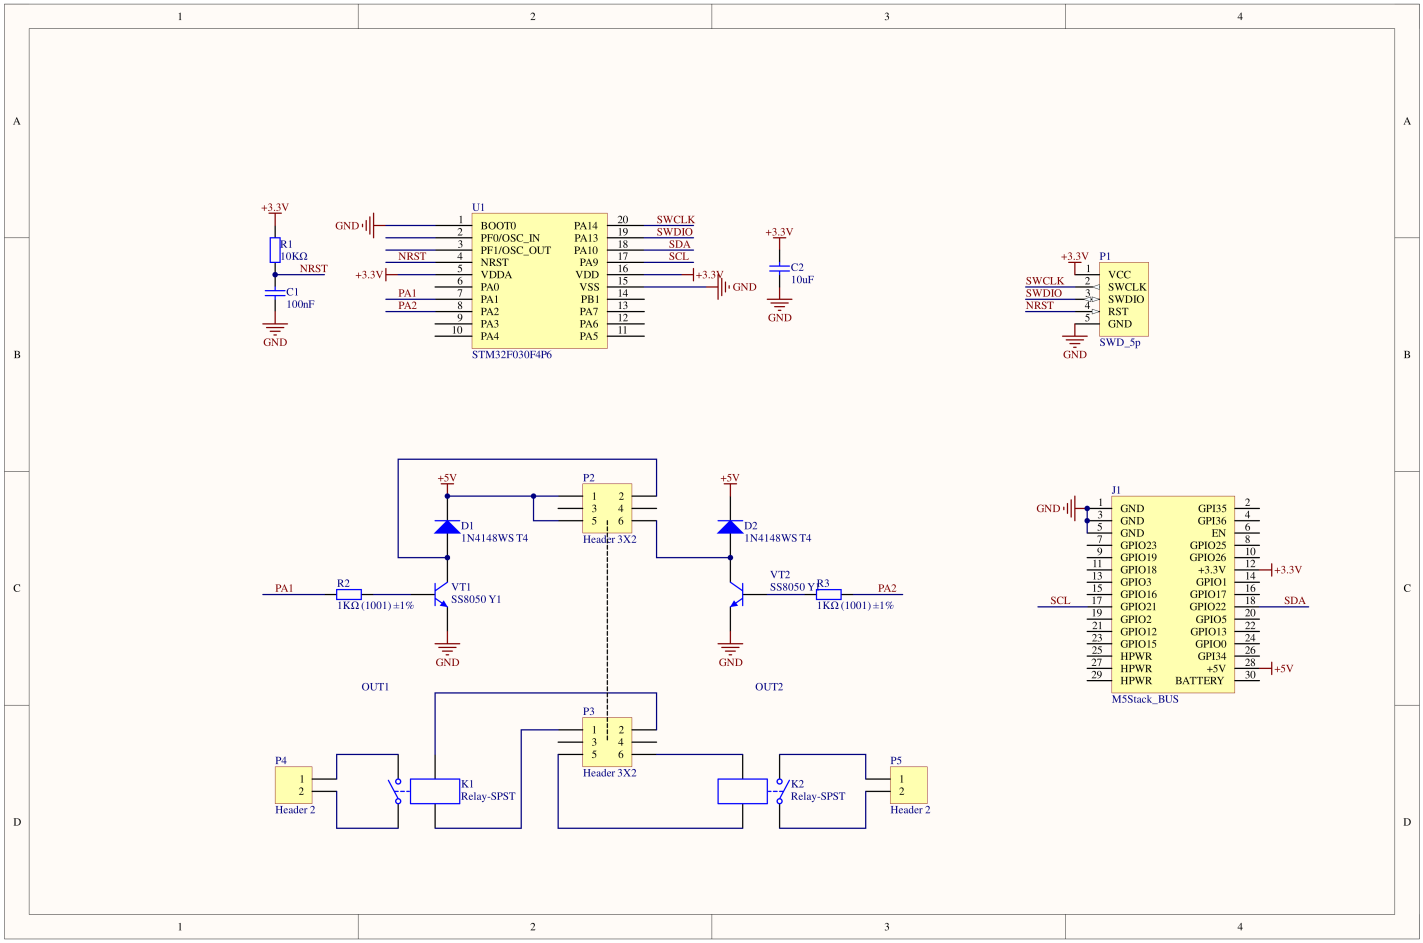


PinMap

M5-Bus

PIN	LEFT	RIGHT	PIN
GND	1	2	
GND	3	4	
GND	5	6	
	7	8	
	9	10	
	11	12	3V3
	13	14	
	15	16	
SDA	17	18	SCL
	19	20	
	21	22	
	23	24	
HPWR	25	26	
HPWR	27	28	5V
HPWR	29	30	

Model Size

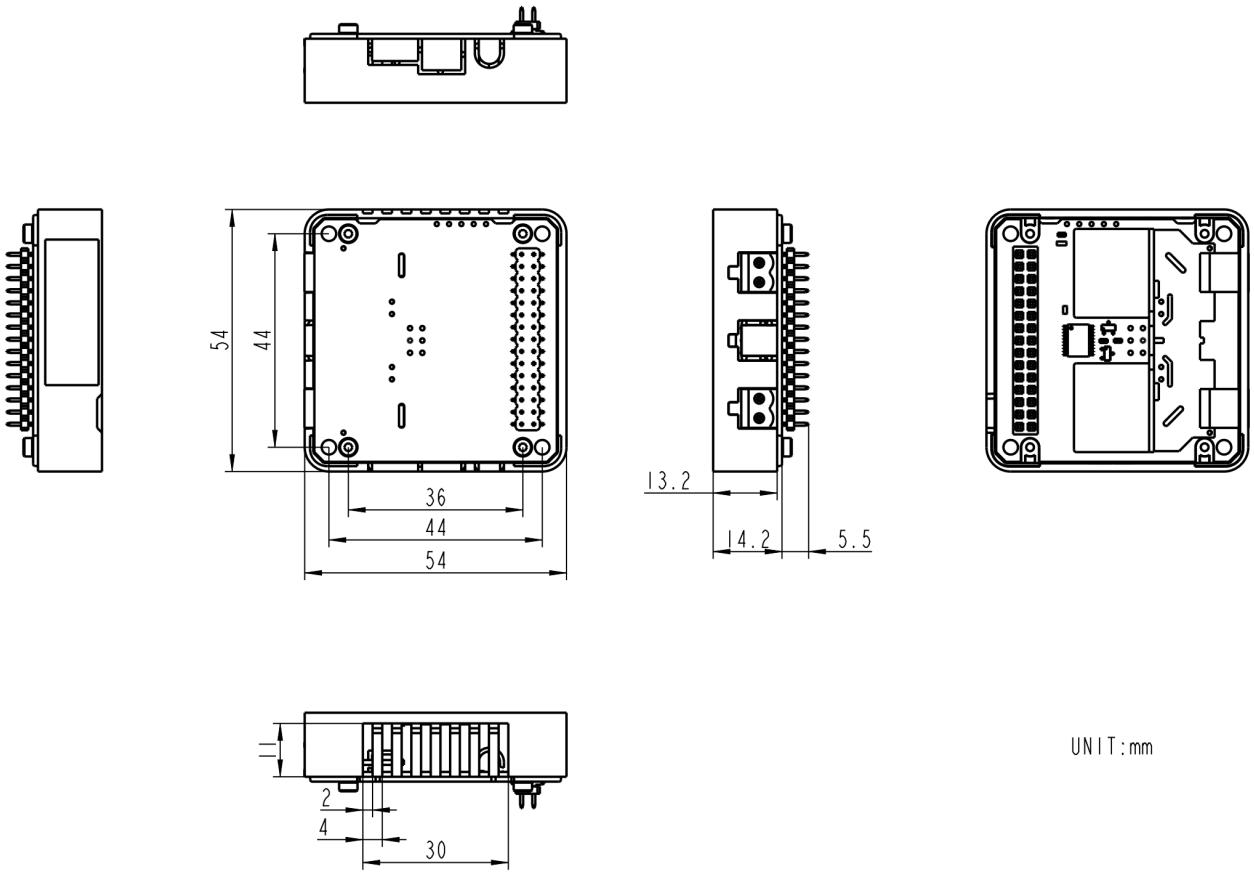

Datasheets

- 932-5VDC-SL-AH RELAY
- STM32F030F4P6

Softwares

Arduino

- Module13.2 2Relay Arduino Library
- Module13.2 2Relay Arduino Tutorial

UiFlow1

- Module13.2 2Relay UiFlow1 Docs

UiFlow2

- Module13.2 2Relay UiFlow2 Docs

Protocol

REG MAP (Addr:0x25)		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	note
RELAY control	0x00 R/W	Relay0	Relay1															**Relay**: 1: on; 0:off
Firmware version	0xF0 R															Version		**Version**: firmware version
I2C Address	0xF0 R/W																Addr	**Addr**: I2C address: 0~127

Video