Stamp Cat1

SKU:S004



















Description

Stamp Cat1 is a compact LTE CAT1 data communication module, built-in with the SIM-A7680C module adapted to the LTE CAT1 frequency bands in China, supporting LTE-TDD/LTE-FDD wireless communication standards. The module integrates an SMA external antenna interface to ensure communication quality and signal stability. Compared to NB-IoT, CAT1 has stronger data transmission capabilities, with a maximum downlink rate of 10Mbps (uplink)/5Mbps (downlink). This module is very suitable for application scenarios that require data transmission rates (remote control/data transmission, etc.).

Features

- SIM-A7680C
  - Suitable for CAT1 frequency bands in China
  - LTE CAT1 module, supports LTE-TDD/LTE-FDD wireless communication standards
  - Maximum downlink rate 10Mbps / maximum uplink rate 5Mbps.
  - UART interface / AT command control
  - Card slot specification: MicroSIM
- Onboard IPEX external antenna interface, can be connected to an SMA rod antenna via a feeder
- Development platforms:
  - UIFlow
  - Arduino
- Multiple forms
  - Supports various application forms (SMT, DIP, flying leads)
  - Equipped with high-temperature plastic armor, supports SMT reflow temperature (230°C)
- SIM-A7680C module certifications:
  - 3C/SRRC/NAL
  - RoHS/REACH

Includes

- 1 x Stamp Cat1
- 1 x 2dBi@ 800-2700MHz SMA rod 4G antenna (with frequency band sticker)
- 2 x SMA to IPEX feeder cables AH-15CM-IPEX 10cm
- 1 x L-shaped hex key 1.5mm (compatible with M2 screws)

Applications

- Remote control/data collection
- Cloud data applications

Certifications

SIM-A7680C Module Certifications


- 3C/SRRC/NAL/RoHS/REACH

Specifications


Specification	Parameters
Communication Module	SIM-A7680C
Uplink/Downlink Speed	Maximum downlink rate 10Mbps / maximum uplink rate 5Mbps
Supported CAT1 Bands	LTE-TDD: B34/B38/B39/B40/B41 LTE-FDD: B1/B3/B5/B8
Network Protocols	TCP/IP/IPV4/IPV6/MultiPDP/FTP/HTTP/DNS/RNDIS/ECM/PPP/TLS/LBS/TTS/MQTT/WiFi Scan
Communication Method	UART 115200bps 8N1
SIM Card Slot	MicroSIM
Standby Current	DC 5V@43mA
Network Access Current	DC 5V@93mA
Communication Interface	UART: baud 115200 8N1
Net Weight	4.5g
Gross Weight	20.8g
Product Size	30.2 x 20.1 x 5.5mm
Package Size	91.1 x 135.5mm

Schematics

- Stamp Cat1 Schematics PDF

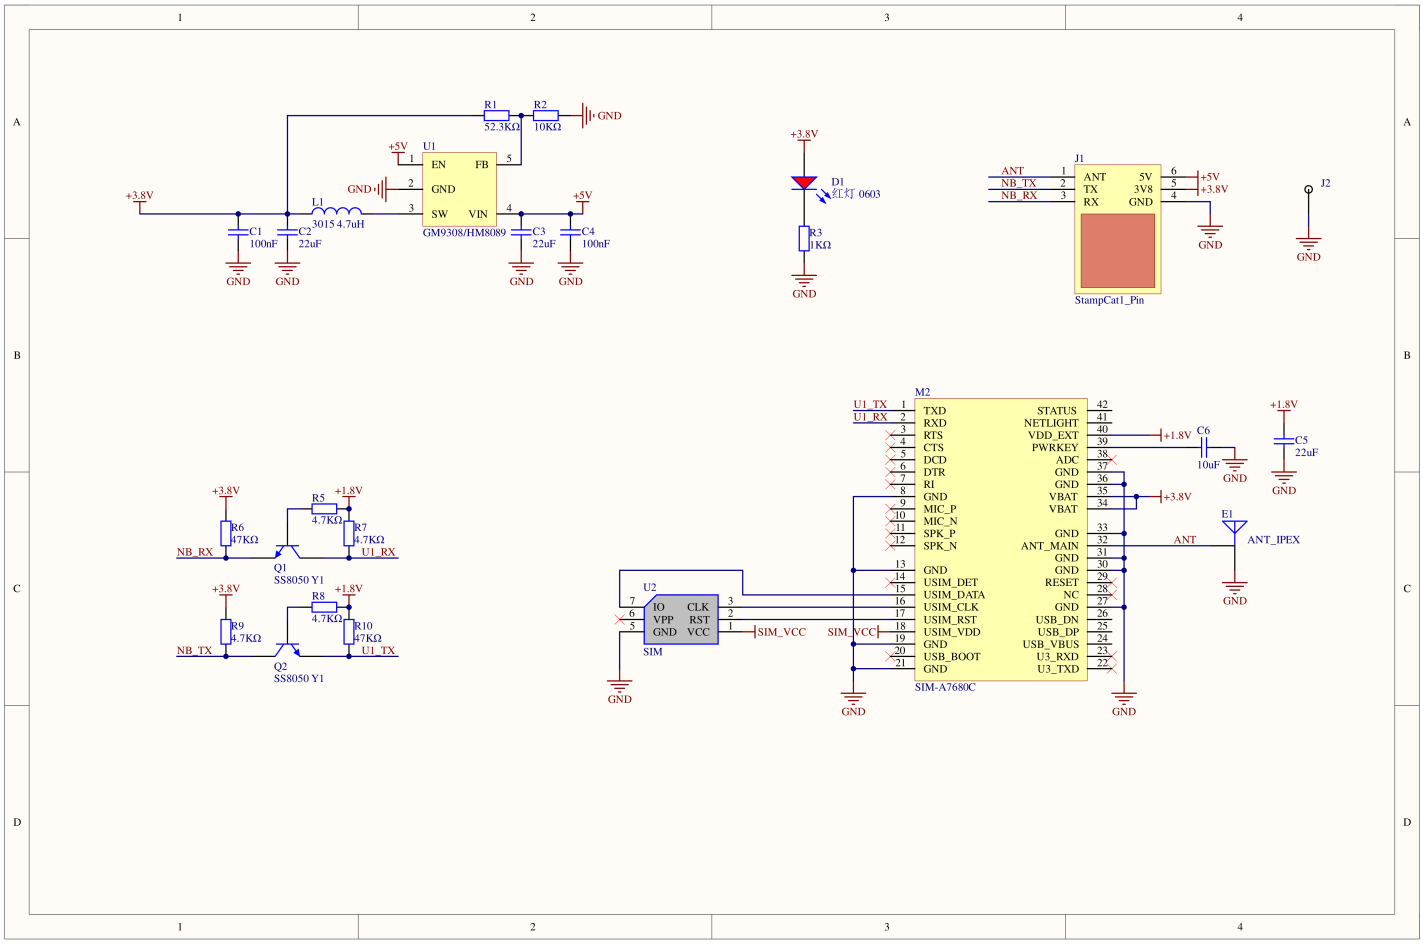

Model Size

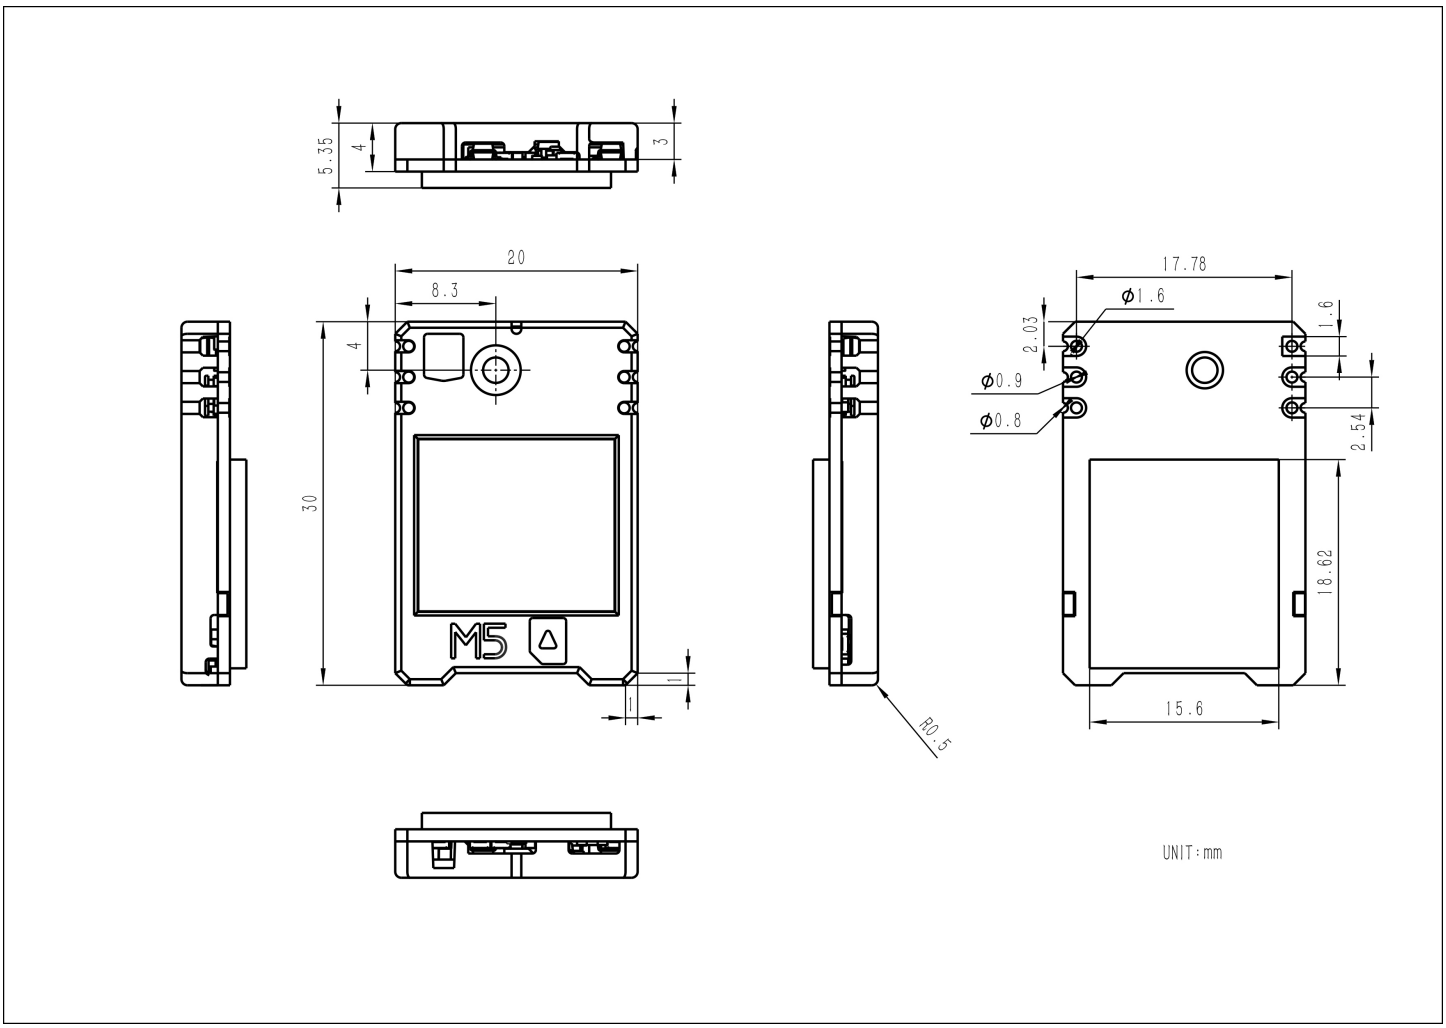

Datasheets

- Application
  - A76XX Series_Audio_Application Note_V1.02.pdf
  - A76XX Series_Blue Tooth_Application Note_V1.02.pdf
  - A76XX Series_CTBURST_Application Note_V1.00.pdf
  - A76XX Series_CTBURST_Application Note_V1.00.pdf
  - A76XX Series_FOTA_Application Note_V1.00.pdf
  - A76XX Series_FTP(S)_Application Note_V1.02.pdf
  - A76XX Series_GNSS_Application Note_V1.02.pdf
  - A76XX Series_GNSS_Dynamic_Loading_Instructions_Application Note_V1.00.pdf
  - A76XX Series_HTTP(S)_Application Note_V1.02.pdf
  - A76XX Series_LBS_Application Note_V1.02.pdf
  - A76XX Series_MQTT(S)_Application Note_V1.02.pdf
  - A76XX Series_SSL_Application Note_V1.02.pdf
  - A76XX Series_Sleep Mode_Application Note_V1.02.pdf
  - A76XX Series_TCPIP_Application Note_V1.02.pdf
  - A76XX Series_UART_Application Note_V1.02.pdf
  - A76XX Series_UIM HOT SWAP_Application Note_V1.02.pdf
  - A76XX Series_Cloud Platform Protocol_Application Document_V1.01.pdf

Softwares

Arduino

- Examples
  - Stamp Cat1 MQTT Client with M5Core
  - Stamp Cat1 MQTT Client with M5Core2
- Libraries
  - TinyGSM
  - PubSubClient

Protocol

- A76XX Series MQTT_EX_AT Command Manual_V1.00.pdf
- A76XX Series_AT_Command_Manual_V1.06.pdf