
Hat SPK

SKU:U055















Description

Hat SPK is a speaker compatible with M5StickC, featuring a built-in PAM8303 amplifier IC (3W single-channel Class-D audio power amplifier). Its high PSRR and differential input eliminate noise and RF interference, enabling high-quality, low-distortion audio reproduction.

Features

- Ultra-low EMI interference, 20dB better than FCC Class B standard at 300MHz
- 3W output power at 5V supply voltage with 4Ω load, total harmonic distortion of 10%
- Ultra-low noise when no input signal
- Operating voltage 2.8V ~ 5.5V
- Short-circuit protection

Includes

- 1 x Hat SPK
- 1 x Double-Sided Tape


Applications

- MP4/MP3

Specifications

Specification	Parameter
Product Size	25.0 x 24.0 x 14.0mm
Package Size	138.0 x 93.0 x 13.0mm
Product Weight	5.5g
Gross Weight	13.0g


Learn

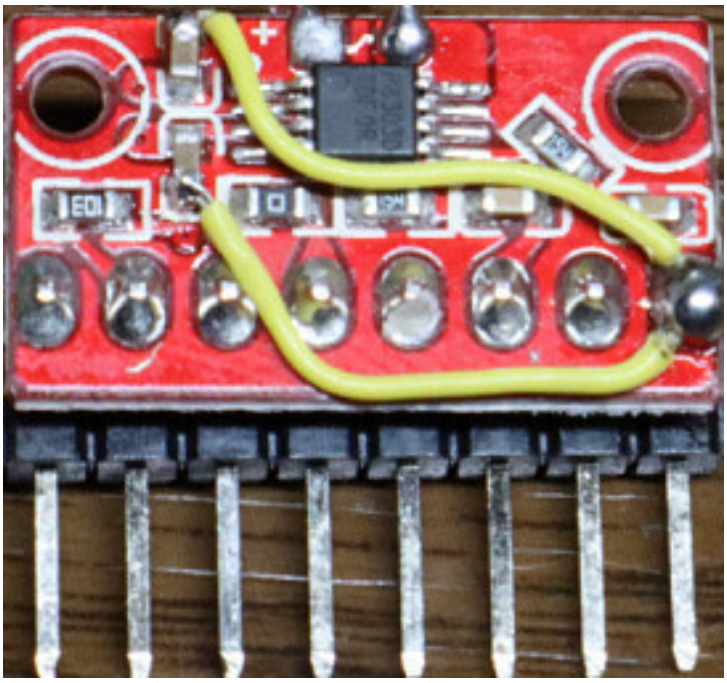

For older version (v1.2) users, you can improve sound quality by wiring as shown in the above diagram.

Schematics

Hat SPK Schematics PDF

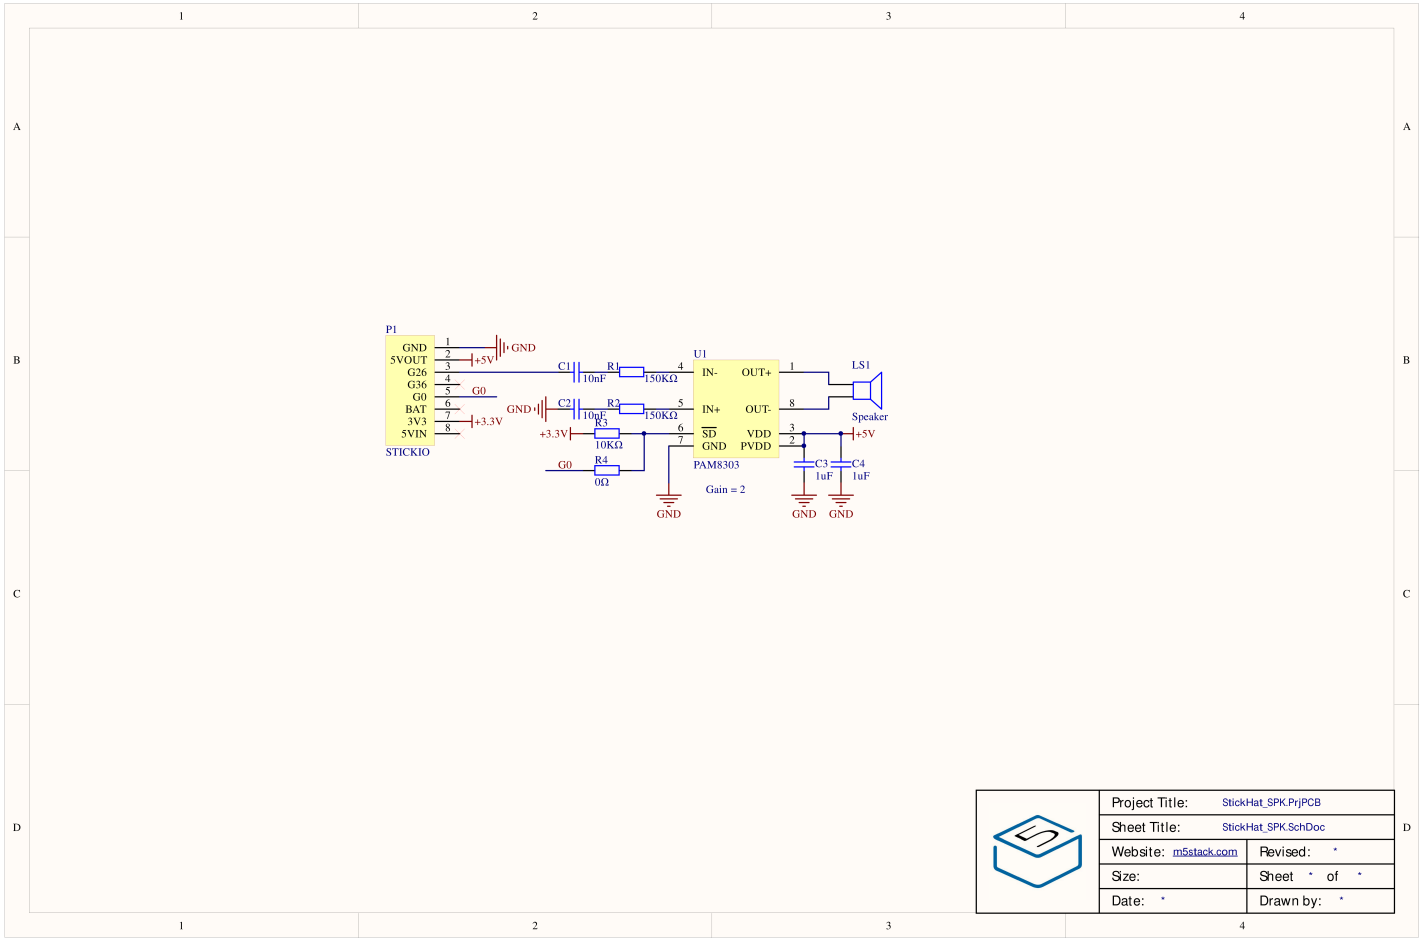


PinMap

M5StickC	G0	G26	3.3V	GND
HAT SPK	SD	IN-	3.3V	GND

Model Size

Hat SPK Model Size PDF

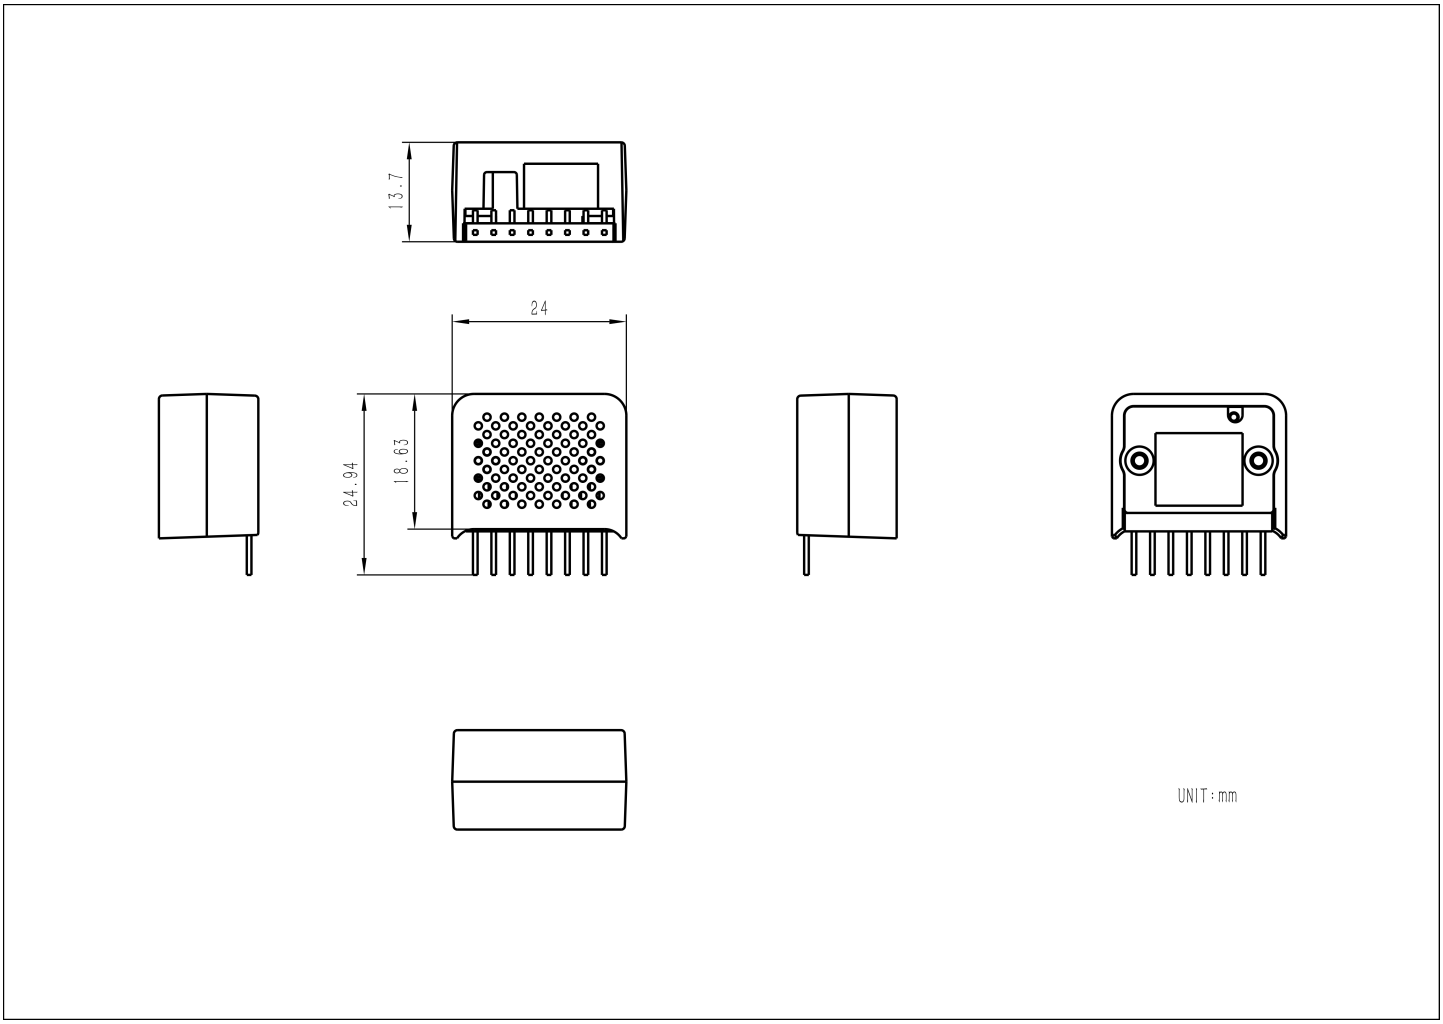

Datasheets

- PAM8303 Datasheet

Softwares

Arduino

- Hat SPK Test Program

UiFlow1

- Hat SPK UiFlow1 Docs

UiFlow2

- Hat SPK UiFlow2 Docs

EasyLoader

Easyloader	Download	Note
Hat SPK Easyloader	download	/

Video

SPK_HAT.mp4