Unit MQTT

SKU:U129



















Description

Unit MQTT is an Ethernet MQTT communication module with an embedded W5500 Ethernet chip. It uses a UART communication interface (controlled by AT commands) and integrates an RJ45 adaptive 10/100M Ethernet port. It supports 4x Topic subscriptions. With extremely low network latency and high stability, it is suitable for various industrial automation, security monitoring systems, automatic measurement and control systems, and device data cloud applications.

Features

- Embedded W5500 Ethernet chip
- RJ45 Ethernet port 10/100Mbps
- Ethernet MQTT communication
- Supports 4x Topic subscriptions
- Low latency
- Development methods:
  - AT commands, UART: 9600bps default
  - Development platforms: UIFlow, Arduino

Includes

- 1 x Unit MQTT
- 1 x HY2.0-4P Grove cable (20cm)

Applications

- Remote data collection/cloud upload

Specifications


Specification	Parameter
Module Processor	ARM Cortex-M3
Communication Interface	UART: baud 9600bps 8N1 default
MQTT	Supports 4x Topic subscriptions, does not support MQTTS
Ethernet Port	RJ45 adaptive 10/100M Ethernet port
Delay	Latency `10ms
Standby Current	40.4mA
Net Weight	22.4g
Gross Weight	27.2g
Product Size	72 x 26 x 19mm
Package Size	73 x 35 x 20mm

PinMap

Unit MQTT

HY2.0-4P	Black	Red	Yellow	White
PORT.C	GND	5V	UART_RX	UART_TX

Model Size

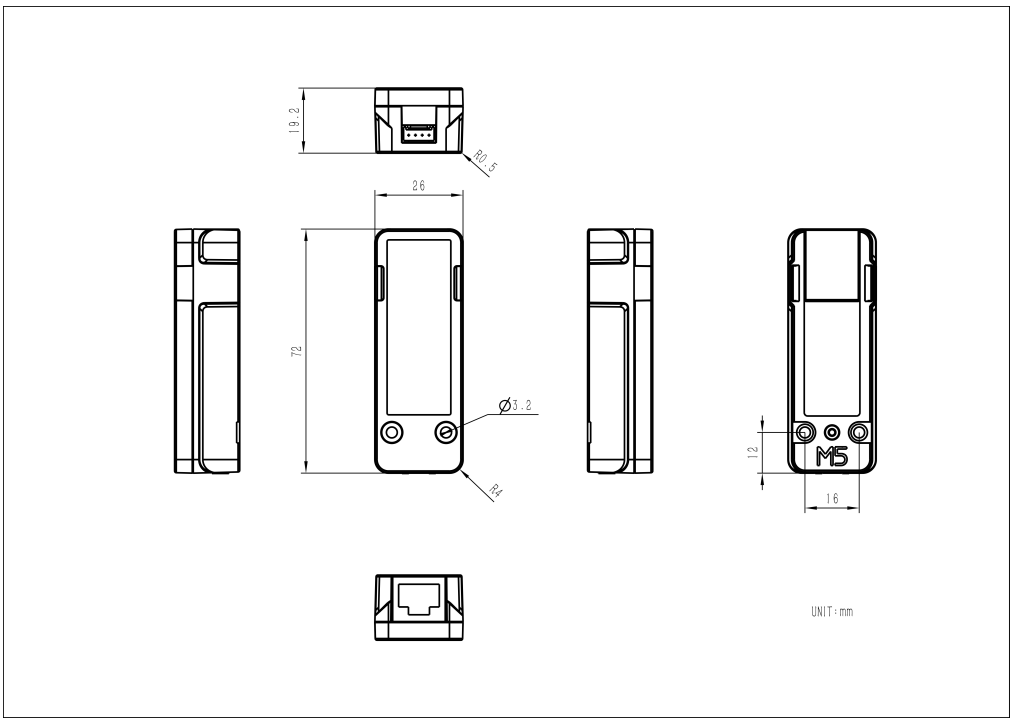

Softwares

Arduino

- Unit MQTT Arduino Library

UiFlow2

- Unit MQTT UiFlow2 Docs

Protocol

> Note: Each command must end with a carriage return and line feed `\r\n` to be recognized by the module.

- Unit MQTT AT Commands

Video

UNIT_MQTT.mp4