

Hat RS485

SKU:U067







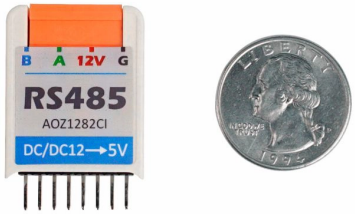



Description

Hat RS485 is an RS485 converter compatible with StickC. It integrates SP485EEN internally, mainly consisting of a 485 automatic transceiver circuit and a DC-DC buck circuit (which can step down the input voltage to 5V). RS485 is a standard used to define the electrical characteristics of drivers and receivers for serial communication systems, widely used in industrial fields, supporting multi-point systems. This product is used to convert TTL standard to RS485 standard. If the external serial device uses the RS485 standard, this module performs TTL-RS485 level conversion to enable communication between devices.

Features

- Built-in SP485EEN
- Built-in automatic transceiver circuit
- Built-in DC-DC buck circuit
- AOZ1282CI
- Input Voltage: DC 12V
- Baud Rate: 115200
- Development Platform: Arduino, UIFlow (Blockly, Python)

Includes

- 1 x Hat RS485
- 1 x HT3.96-4P Terminal
- 1 x I/O Sticker
- 1 x Double-Sided Tape


Applications

- RS485 multi-point systems
- Serial communication in industrial fields

Specifications

Specification	Parameter
Net Weight	7g
Gross Weight	17g
Product Size	34.9 x 24.0 x 13.7mm
Package Size	40 x 42 x 30mm

Schematics

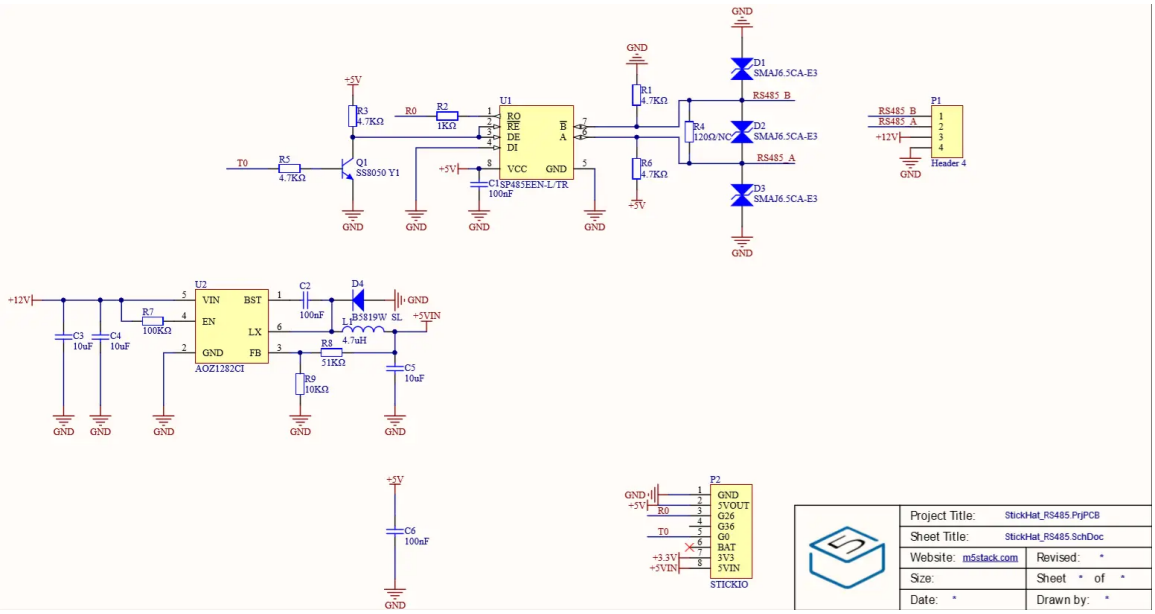


PinMap

M5StickC	G0	G26	5V	GND
Hat RS485	TX	RX	5V	GND

Model Size

- Hat RS485 Model Size PDF

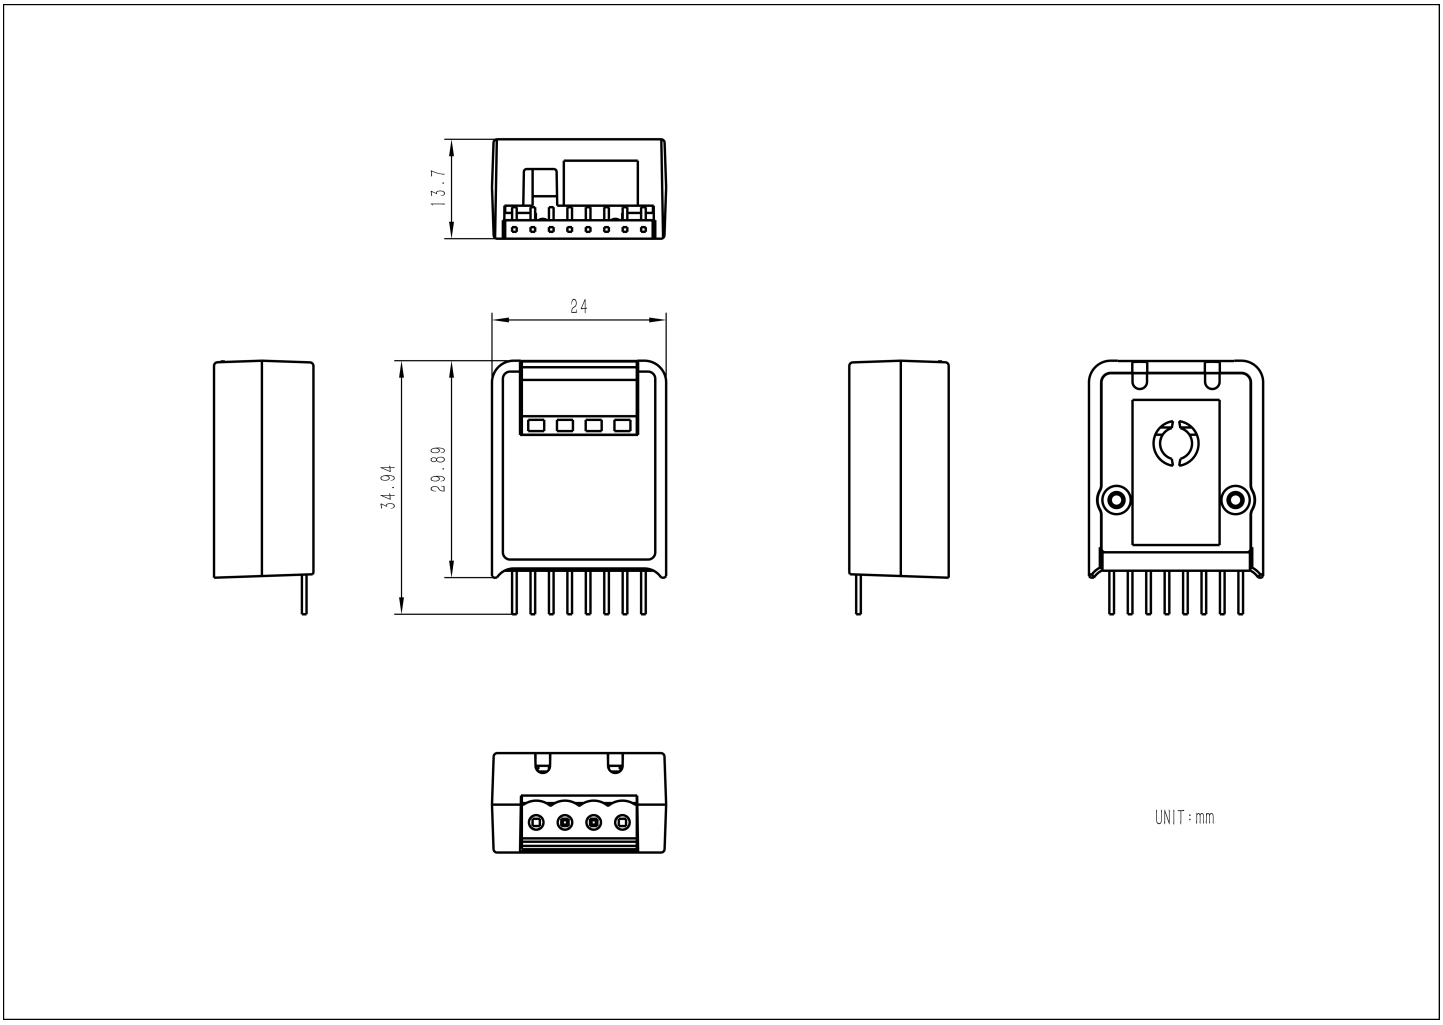

Datasheets

- SP485EEN

Softwares

Arduino

- Hat RS485 Example

UiFlow1

- Hat RS485 UiFlow1 Docs

Easyloader

Easyloader	Download Link	Note
Hat RS485 Easyloader	download	/

Video

RS485_HAT.mp4