Atomic PoE Base

SKU:A091













Description

The **Atomic PoE Base** is an Ethernet controller base compatible with the ATOM series main control units. It supports PoE (Power over Ethernet) technology, allowing the device to be powered directly through a PoE hub/switch without the need for a separate power supply, effectively reducing wiring costs. The base features a built-in W5500 embedded Ethernet controller, which integrates a TCP/IP protocol stack, 8 independent hardware sockets, and 10/100M Ethernet data link layer (MAC) and physical layer (PHY), providing a more convenient internet connection solution for embedded systems. It meets the wired network access requirements in real production environments.

Features

- Compatible with Atom-Lite/Atom-Matrix/AtomS3/AtomS3-Lite
- Supports PoE IEEE802.3 AF
- Wired Ethernet access
- Supports 8 independent hardware sockets for simultaneous communication
- Supports TCP, UDP, ICMP, IPv4, ARP, IGMP, PPPoE protocols
- Integrated 10BaseT / 100Base-T Ethernet PHY

Includes

- 1 x Atomic PoE Base

Applications


- Remote control
- Wired network access

Specifications

Specification	Parameter
Ethernet Chip	W5500
Supported Protocols	TCP, UDP, ICMP, IPv4, ARP, IGMP, PPPoE
PoE Power Supply Method	Idle pin power supply (10M/100M Ethernet), J4&J5 (VC-), J7&J8 (VC+)
PoE Standard	IEEE802.3 AF
Operating Temperature	0 ~ 40°C
Product Size	64.0 x 24.0 x 17.5mm
Product Weight	17g
Package Size	136 x 92 x 20mm
Gross Weight	20.5g

Schematics


- Atomic PoE Base Schematics PDF

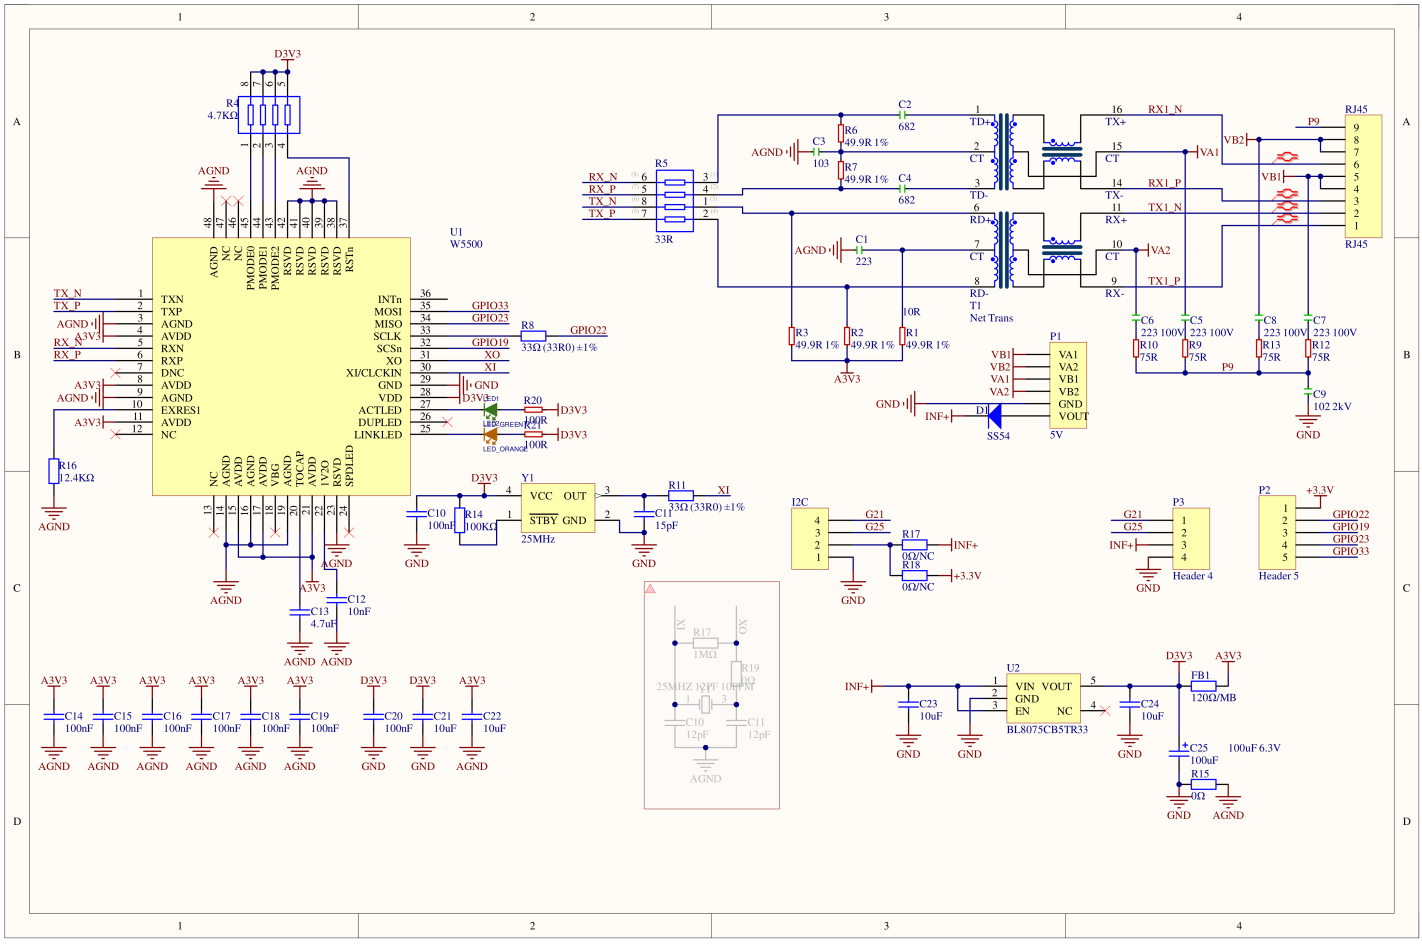

PinMap

PIN	LEFT	RIGHT	PIN
		1	3V3
	2	3	SPI_CLK
	4	5	CS
5V	6	7	SPI_MISO
GND	8	9	SPI_MOSI

Model Size

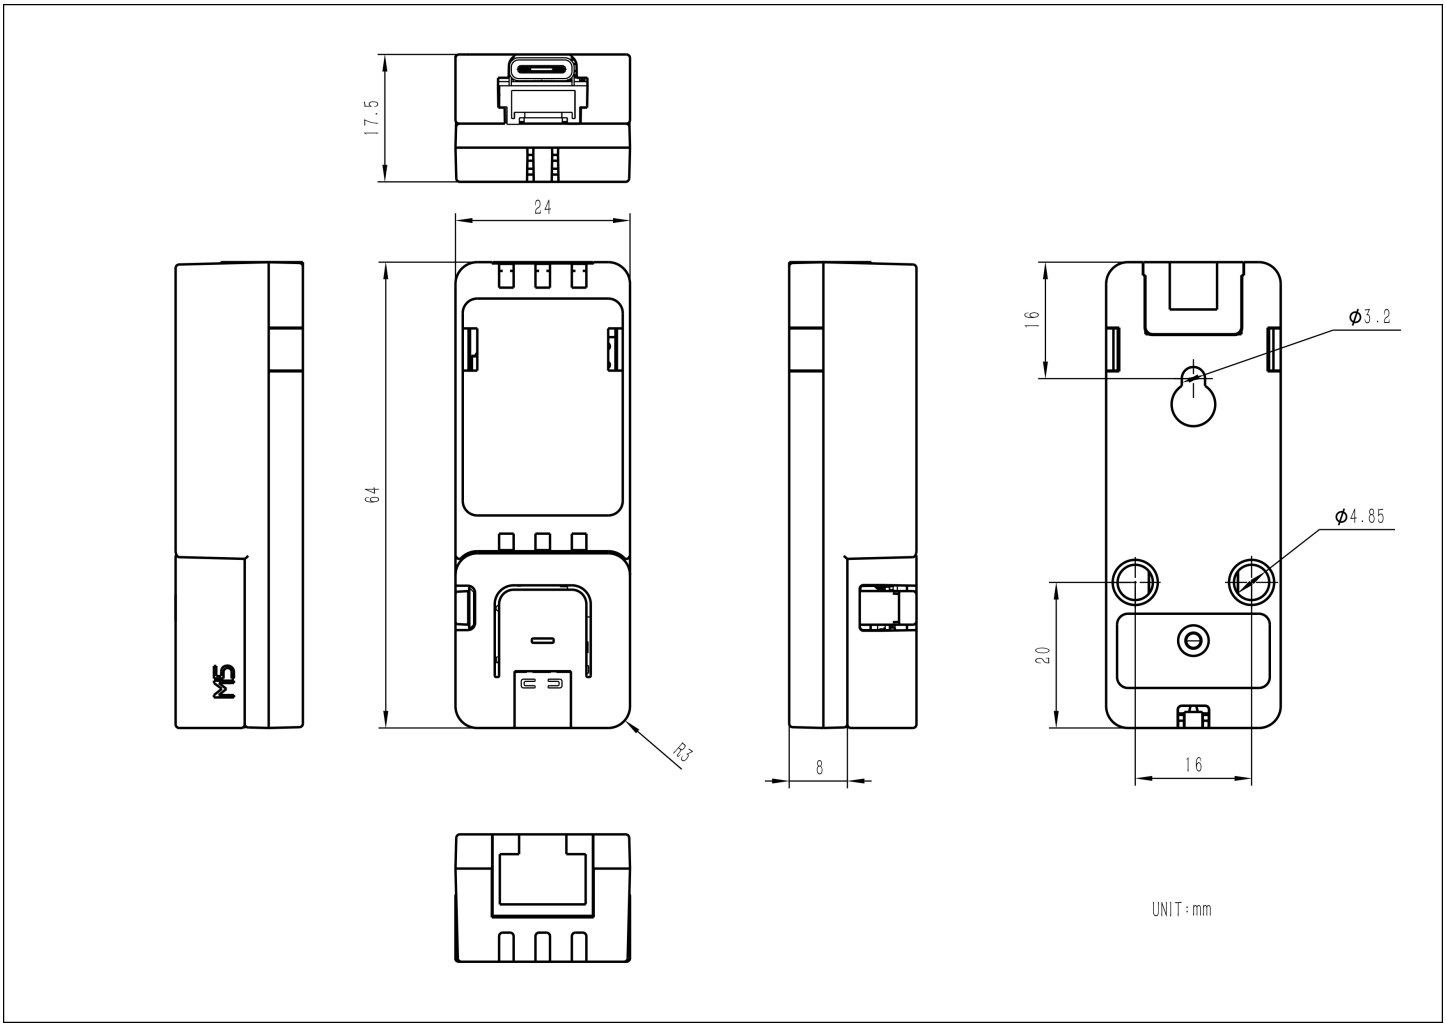

Datasheets

- W5500

Softwares

Arduino

- Atomic PoE Base Arduino Quick Start

- Atomic PoE Base Remote LED Control - with Atom-Lite
- Atomic PoE Base HTTP Client - with AtomS3
- Atomic PoE Base LinkStatus - with AtomS3
- Atomic PoE Base MQTT Client - with AtomS3
- Atomic PoE Base WebServer - with AtomS3

UiFlow1

- Atomic PoE Base UiFlow1 Docs

EasyLoader

Easyloader	Download Link	Notes
Atomic PoE Base Test Easyloader	download	/

Video

- Connect to Ethernet, access the control page via IP, and control the RGB LED to change colors

ATOM_PoE.mp4