


Category-conditioned active observation

Executed CPU architecture · local binary task

Shared task priors: two configurations · safe pose graph · action budget

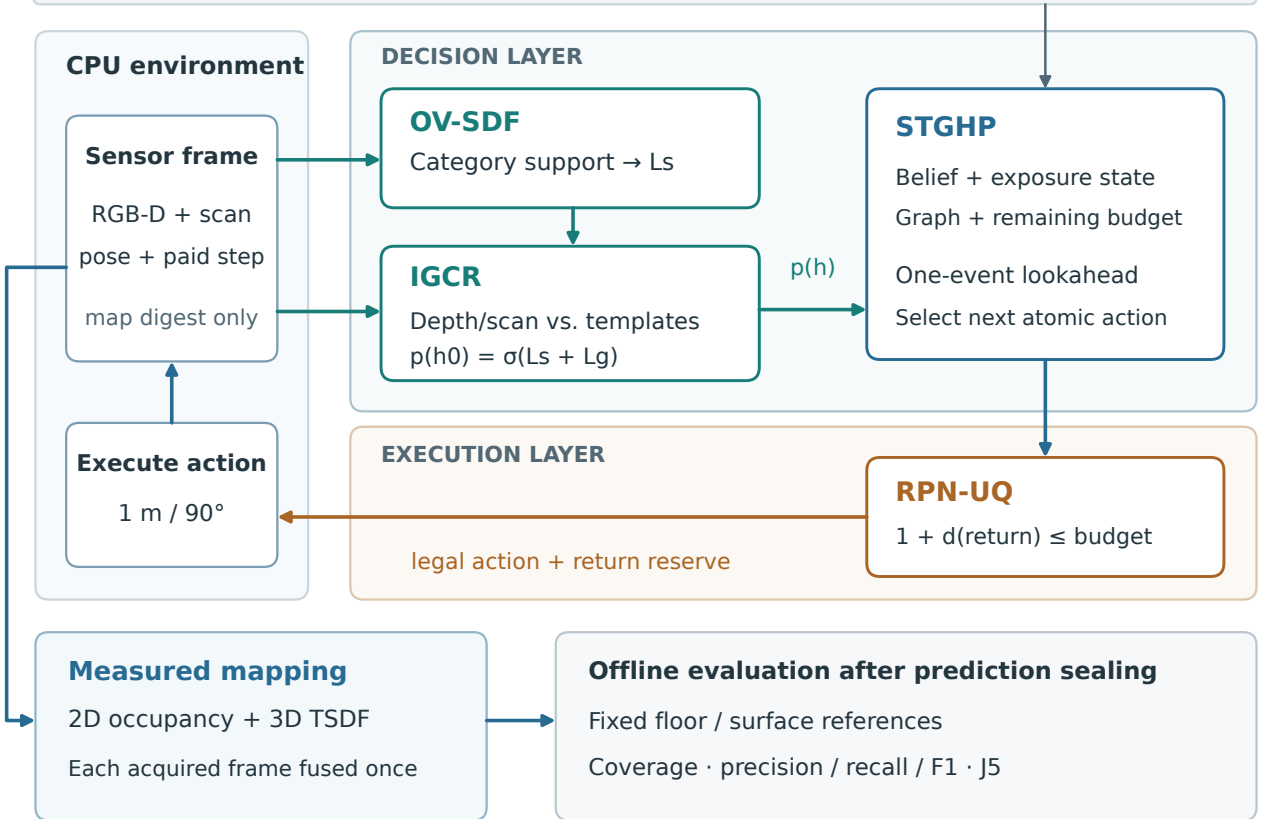

Planning uses public forecasts; reconstructed surfaces use acquired depth.



Optional ROS 1 platform interfaces

ZED RGB-D / pose + scan → observation input

Observation target → navigation goal

User-supplied image · future deployment, no physical results