





column-shared
input mux
(time-mux)

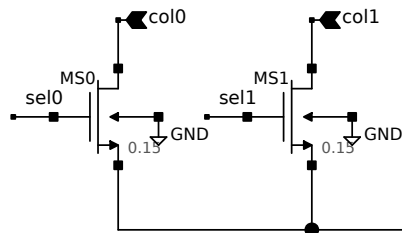

charge-redistribution cap-DAC (binary-weighted, b bits)

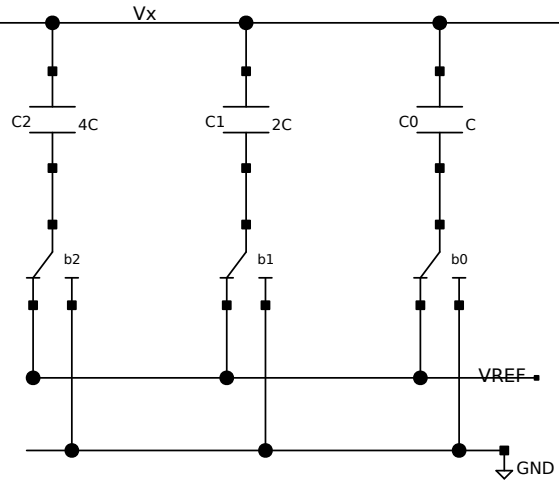

StrongARM comparator



ref switches: VREF / GND per bit

-> shared comparator + DAC amortised across columns