



column-shared
input mux
(time-mux)


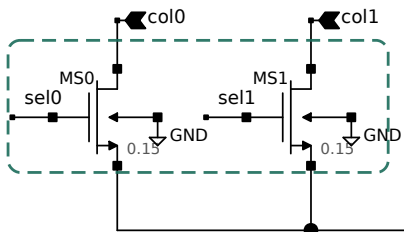


charge-redistribution cap-DAC (binary-weighted, b bits)

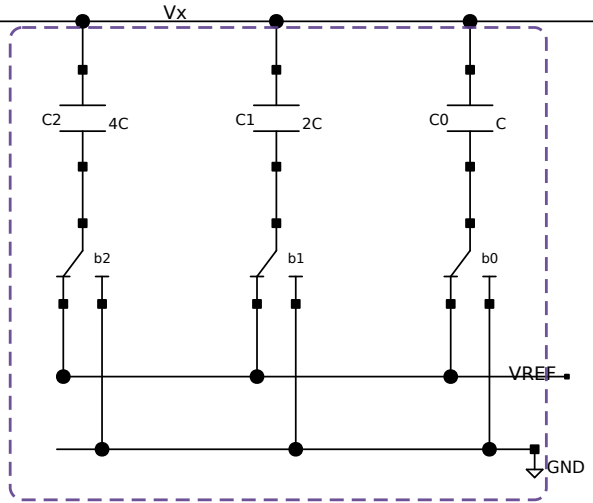

ref switches: VREF / GND per bit

StrongARM comparator

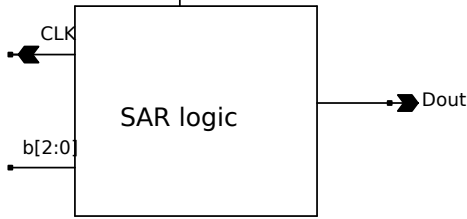

-> shared comparator + DAC amortised across columns