


Edgeboard Connector: Pitch - 2mm

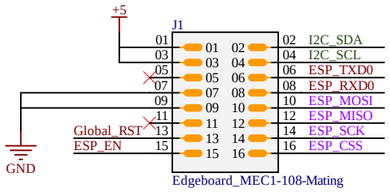



Global RST


* Reset all 3.3V logic in Motherboard
* 3.3V Buck converter EN pin pull low

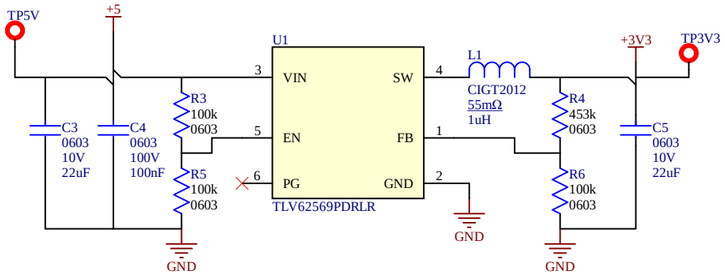




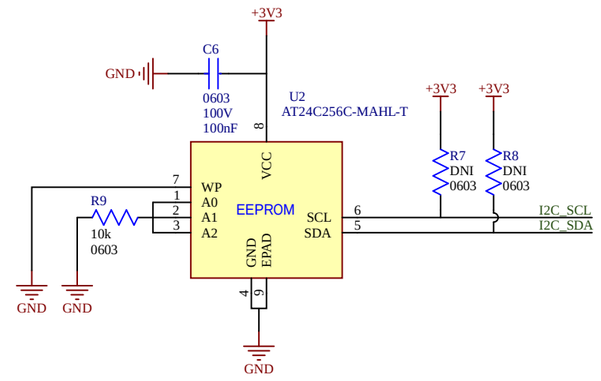




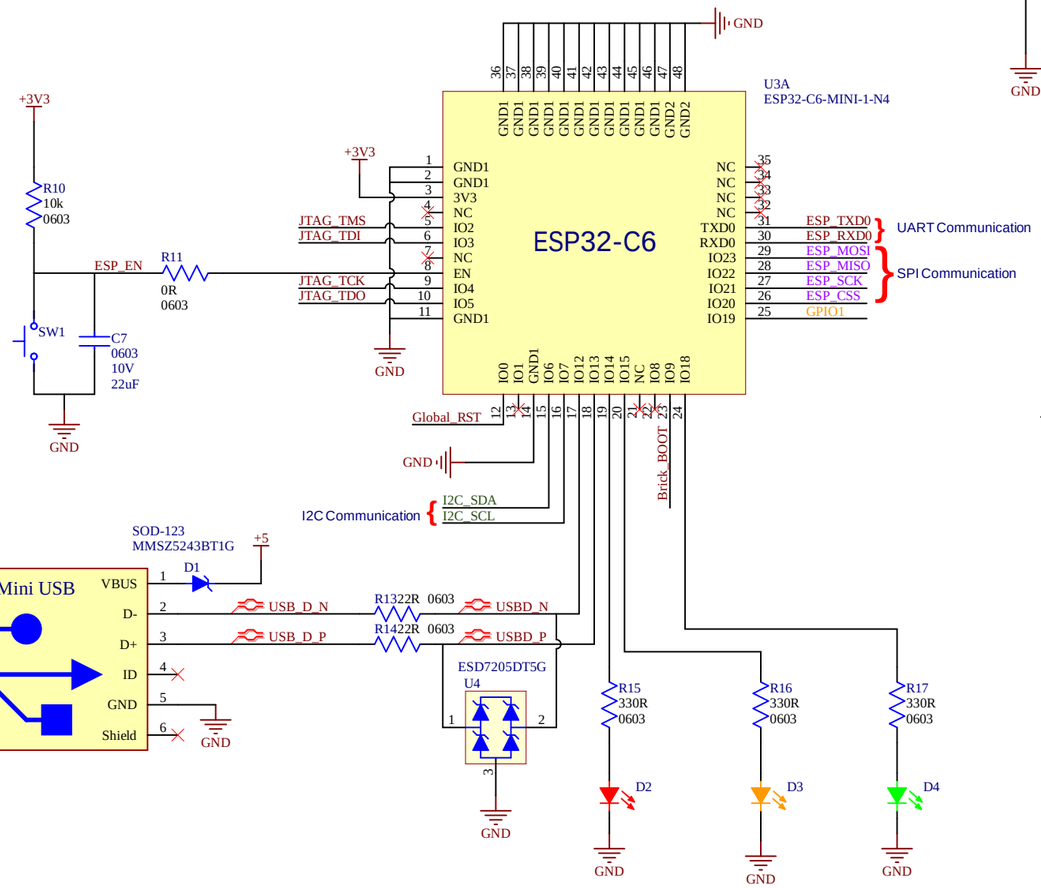






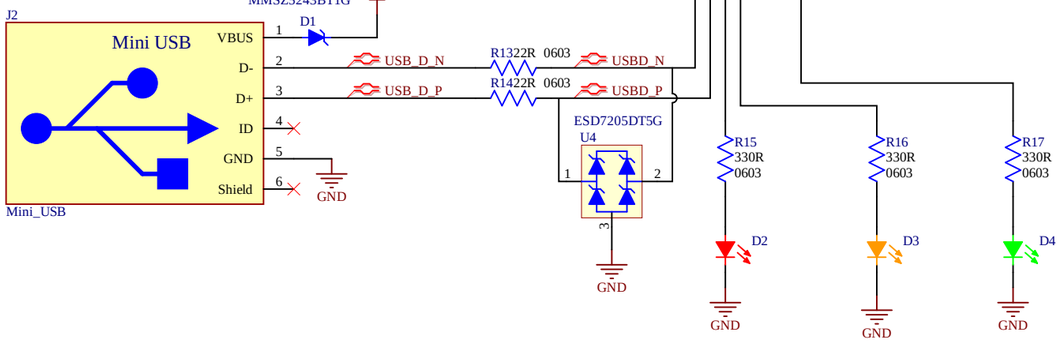


Title: Motor Controller WIFI/BLE Extension Board		
Size: A	Number:	Revision:
Date: 7/30/2026	Sheet of	
File: C:\Users\..\test2_sheet.SchDoc	Drawn By:	


Fabnote

Motor_Controller_Extension_Board_GBR.zip

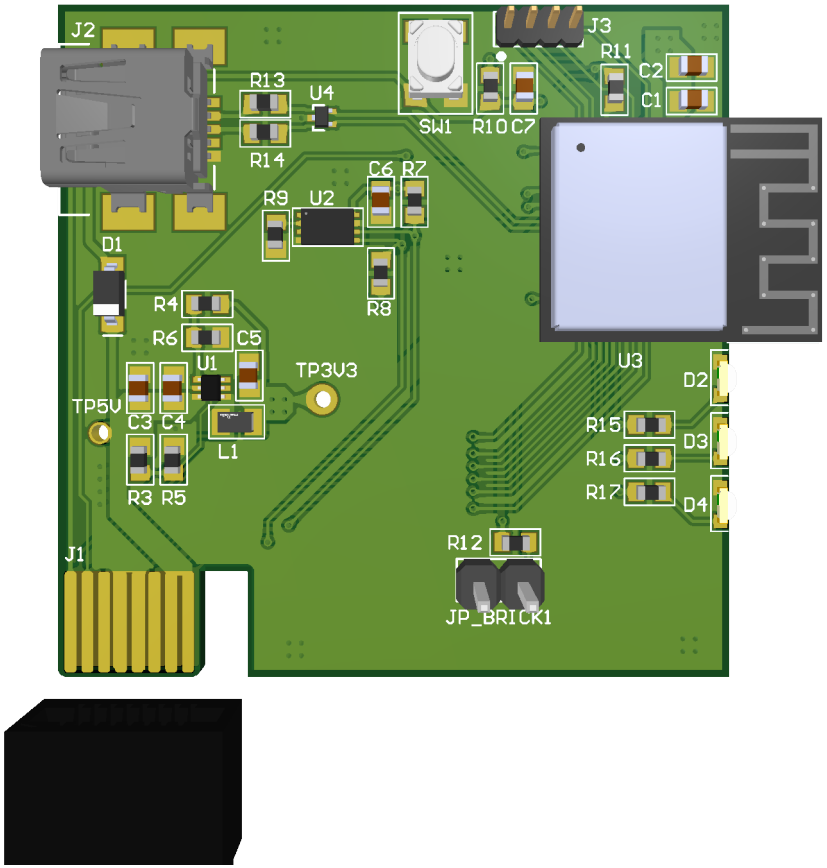


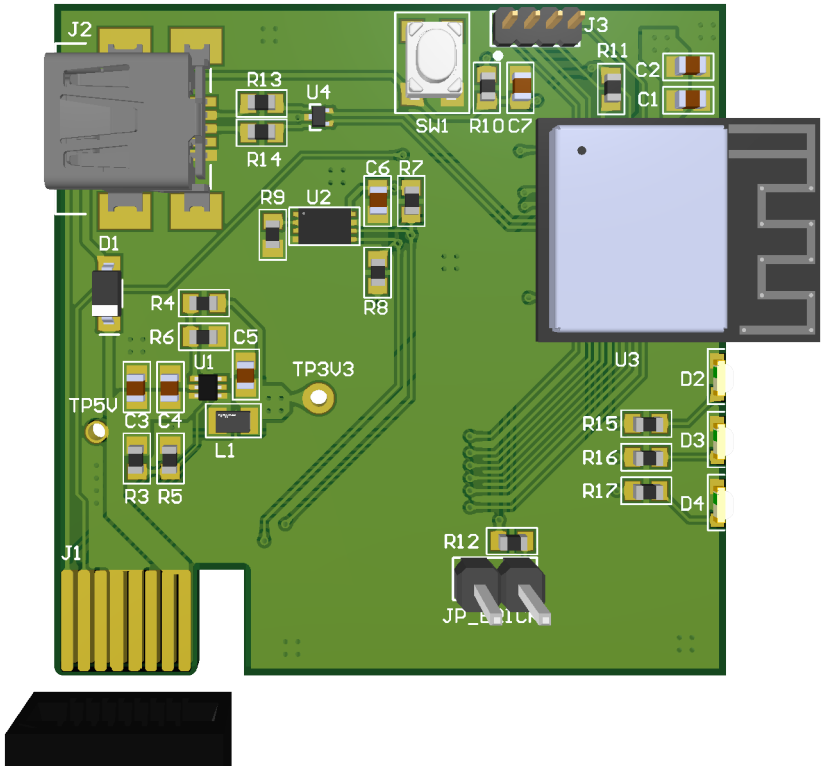


View from Top side (Scale 2:1)

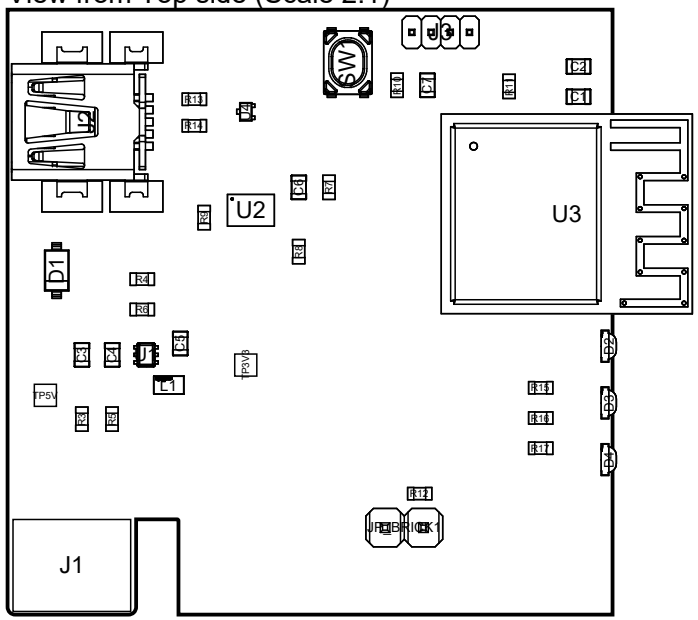


View from Bottom side (Scale 2:1)

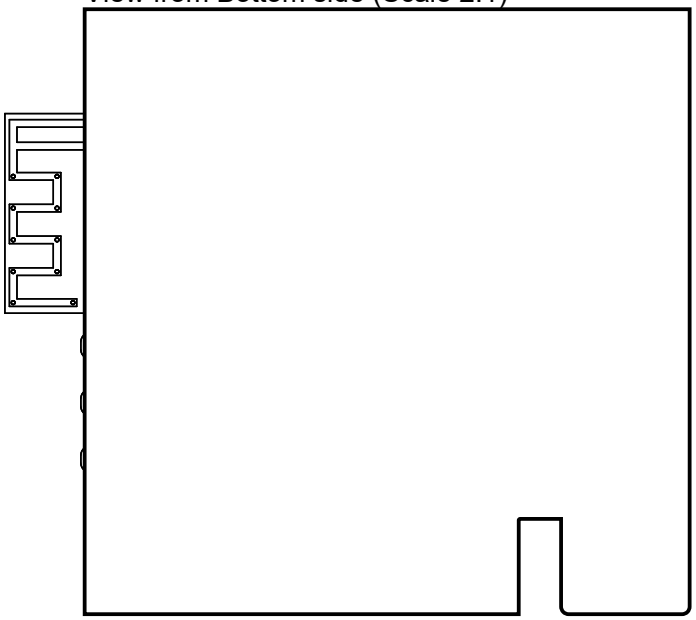


View from Top side (Scale 2:1)

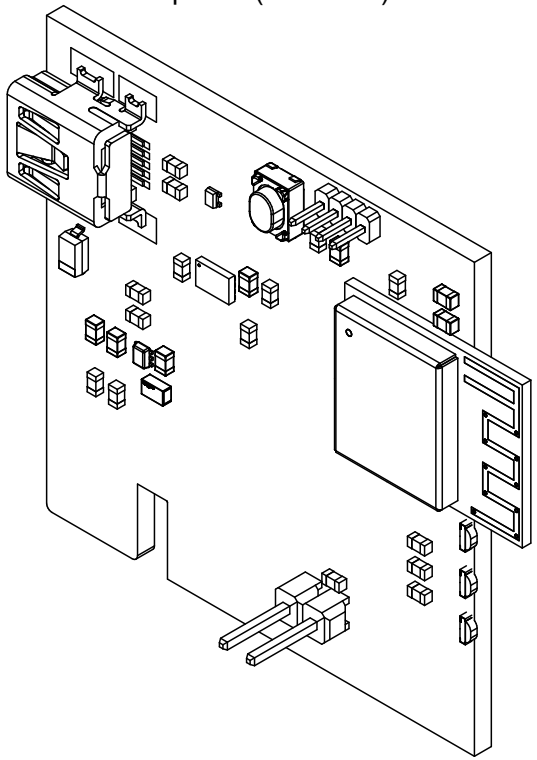


View from Bottom side (Scale 2:1)

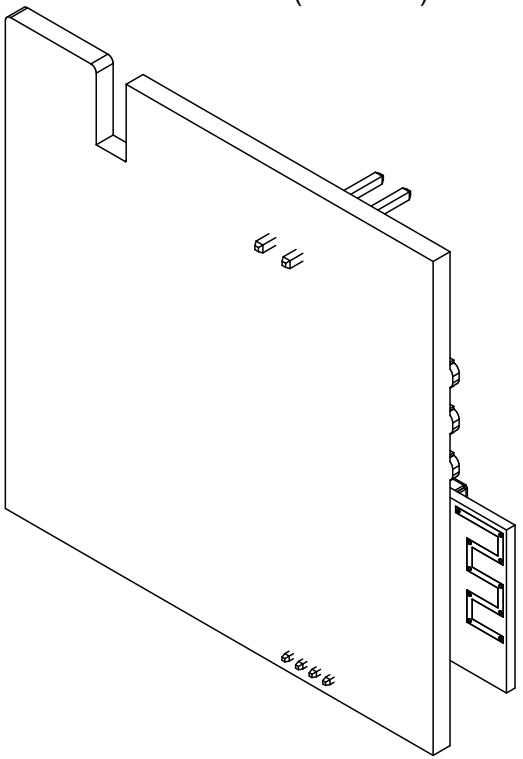


Top Layer (Scale 2:1)

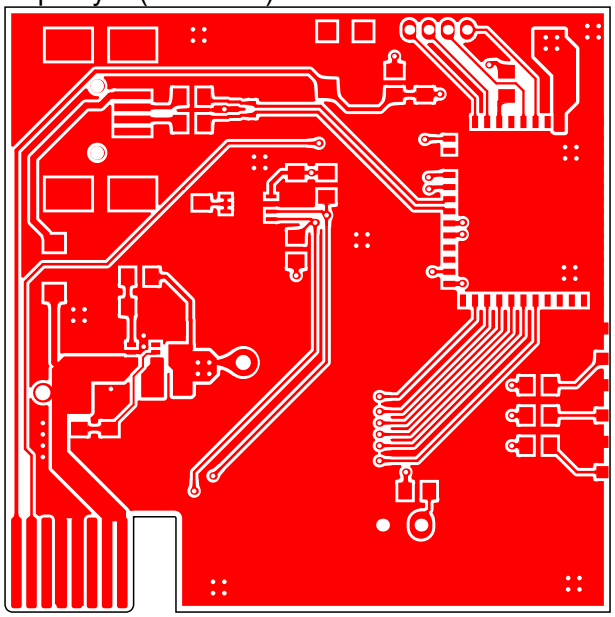


Top Overlay (Scale 2:1)

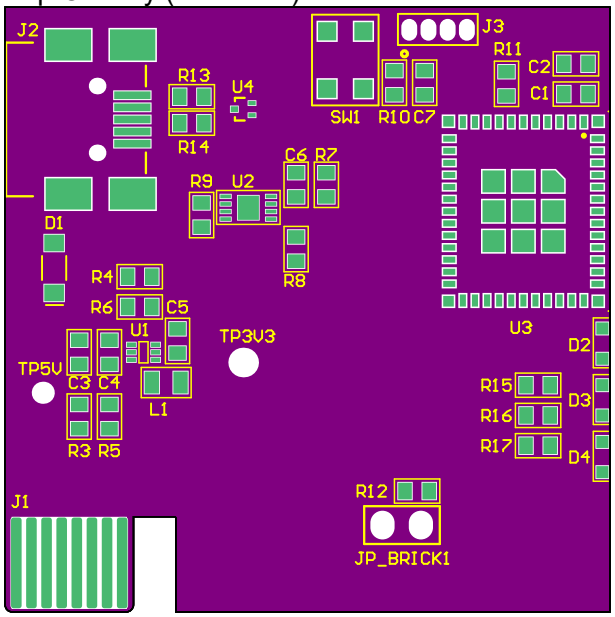


Bottom Layer (Scale 2:1)

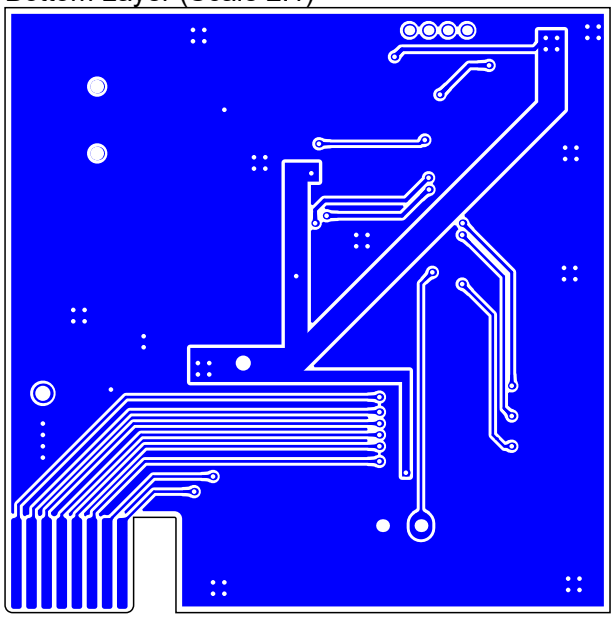

Bottom Solder (Scale 2:1)

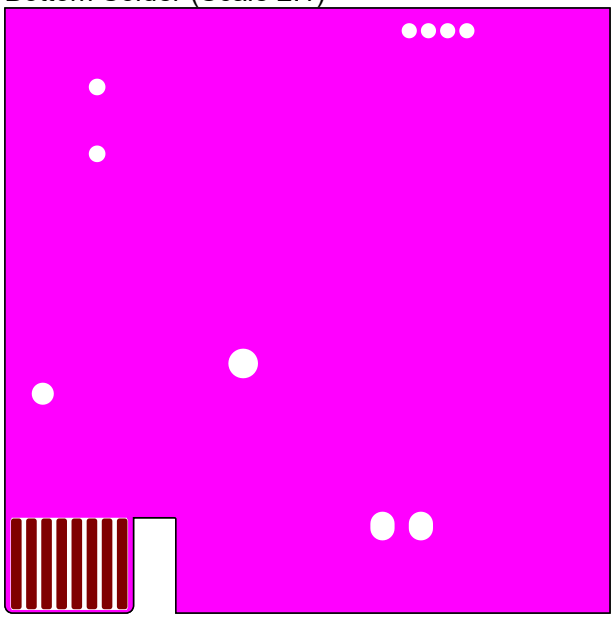

Drill Drawing View (Scale 4:1)

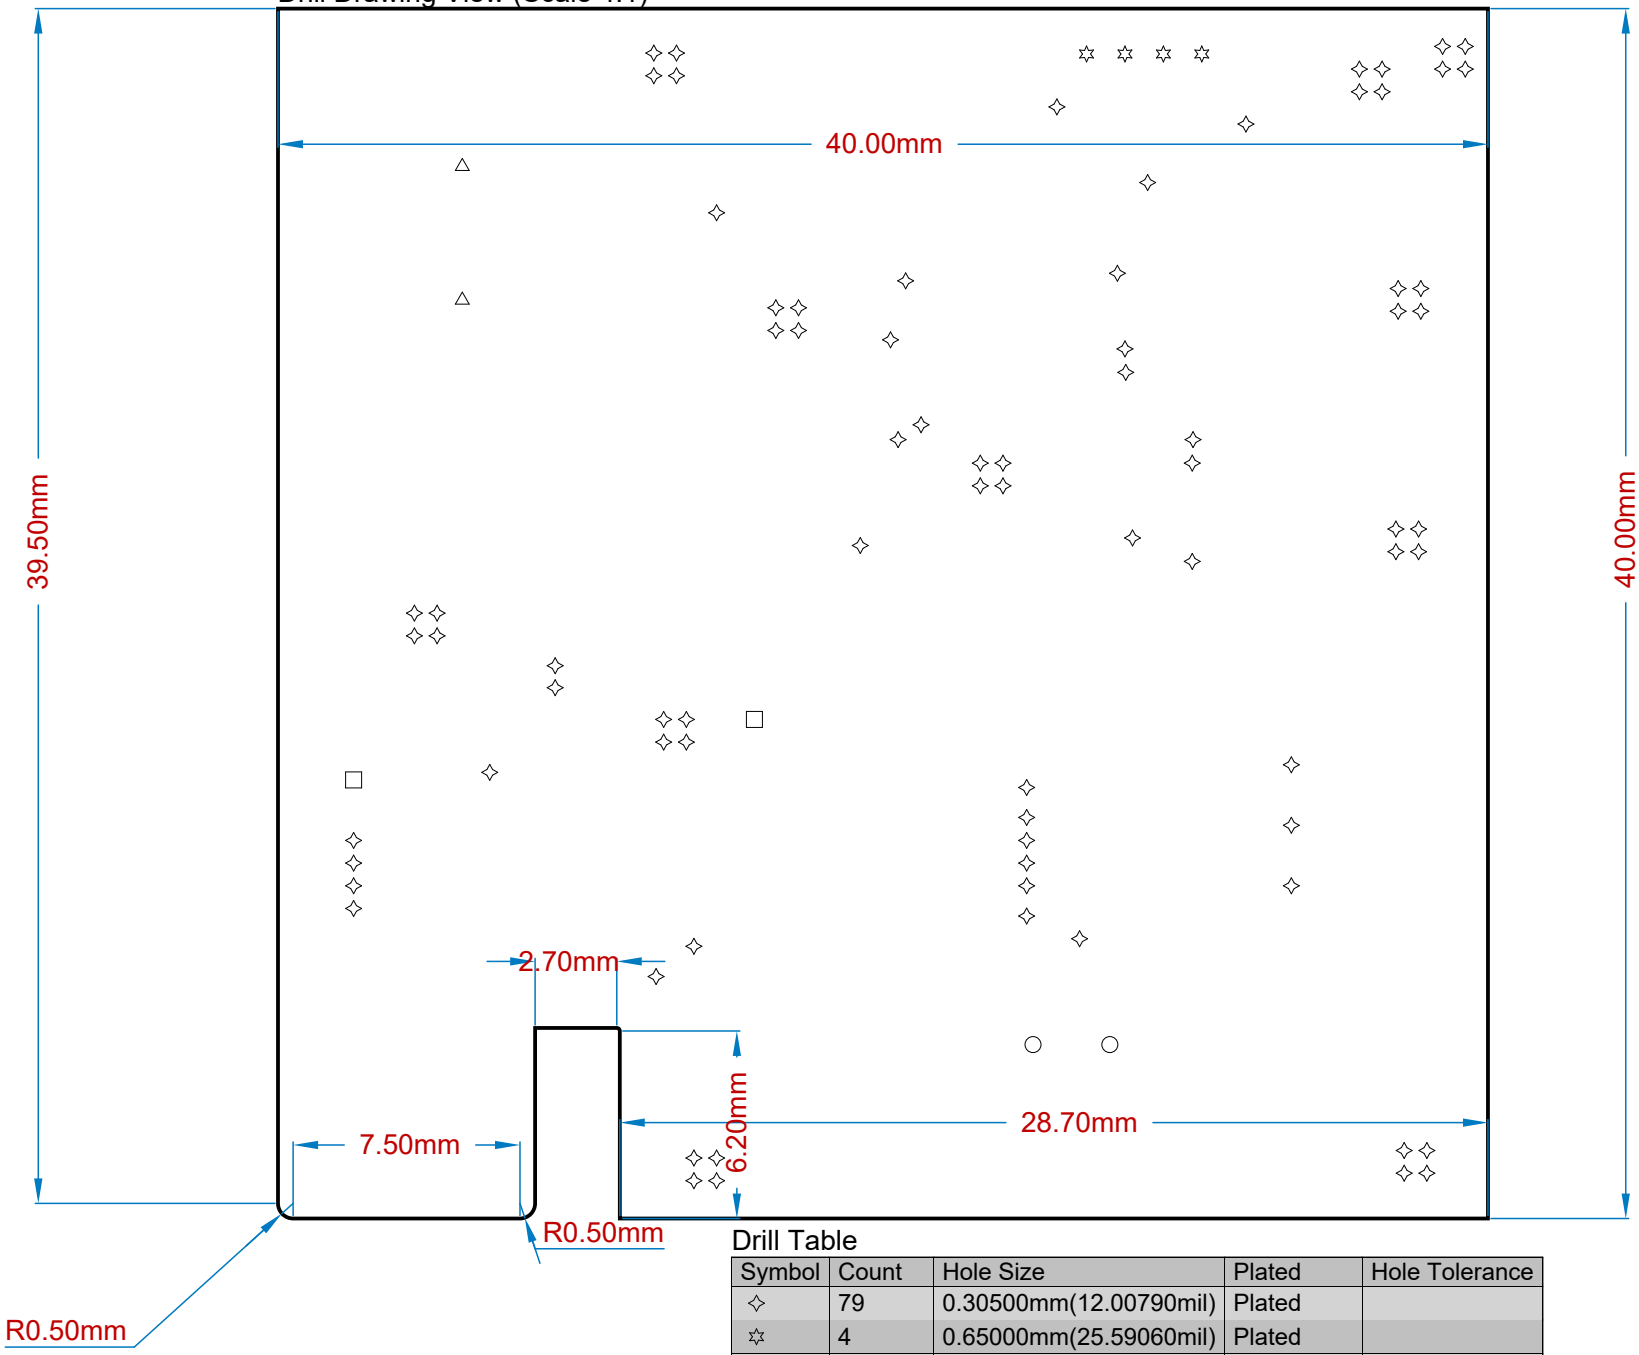


Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
✧	79	0.30500mm(12.00790mil)	Plated	
✡	4	0.65000mm(25.59060mil)	Plated	
○	2	0.85000mm(33.46460mil)	Plated	
△	2	0.90000mm(35.43310mil)	Non-Plated	
□	2	1.00000mm(39.37010mil)	Plated	
	89 Total			

1. Finished PCB Thickness: 1.6mm ± 0.15mm
2. Material Type: FR-4
3. Surface Finish: Lead-Free HASL/ENIG
4. Layer Stackup Order (2 layer):
 a. Top Layer (.GTL): 0.035mm Copper (1 oz)
 b. Bottom layer (.GBL): 0.035mm Copper (1 oz)
6. Smallest Trace Width/Space: 0.15mm
7. Minimum Clearance for Track/Track, Track/Via, Track/Pad: 0.21mm
8. Minimum Clearance between Copper Pour/Copper Pour, Copper Pour/SMD Pad: 0.21mm
9. Tented VIA - NO plugged VIA / VIA in Pad
11. Color
 a. BLACK SOLDER MASK (both side)

Layer Stack Legend

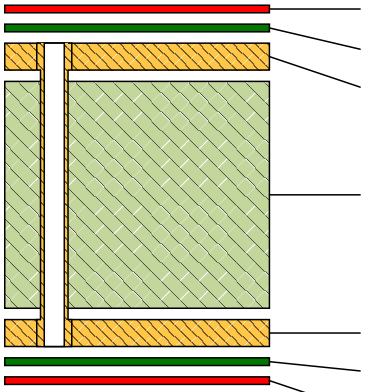

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.0102mm(0.4000mil)	Solder Resist	Solder Mask	GTS
Copper	Top Layer	0.0356mm(1.4000mil)		Signal	GTL
		1.5100mm(59.4488mil)	*FR-4*	*Dielectric*	
Copper	Bottom Layer	0.0356mm(1.4000mil)		Signal	GBL
Surface Material	Bottom Solder	0.0102mm(0.4000mil)	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.6014mm(63.0488mil)