


POWER (3S 12.6V to 5V). Motor current does not pass through this PCB

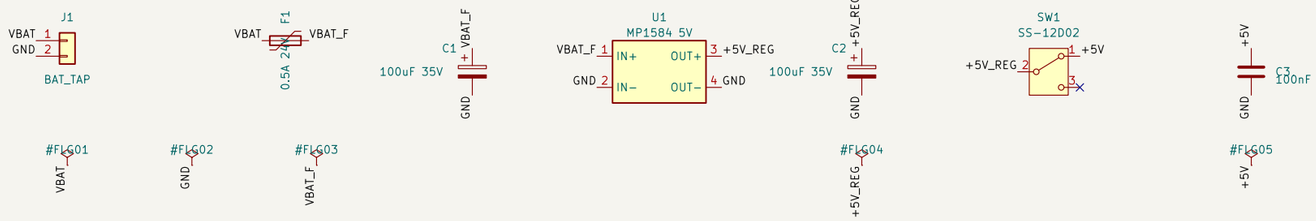


AT128A-70B SOCKET. Not used: PF4–7 (JTAG), PE0/PE1/PB1 (ISP), USART0

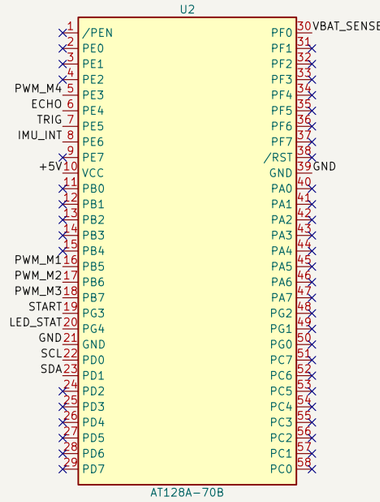

VBAT SENSE (PF0, 10k+10k/10k: 4.2V at full charge)

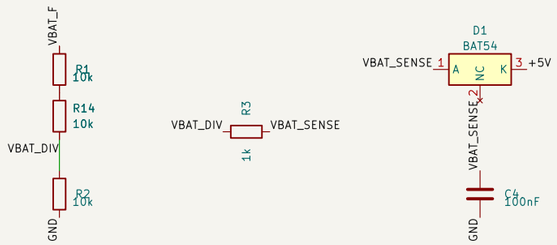


HC-SR04 (J2)




GY-521 (J5) — verify pin order on part: VCC GND SCL SDA XDA XCL ADO INT



ESC SIGNAL (OC1A/B/C, OC3A)

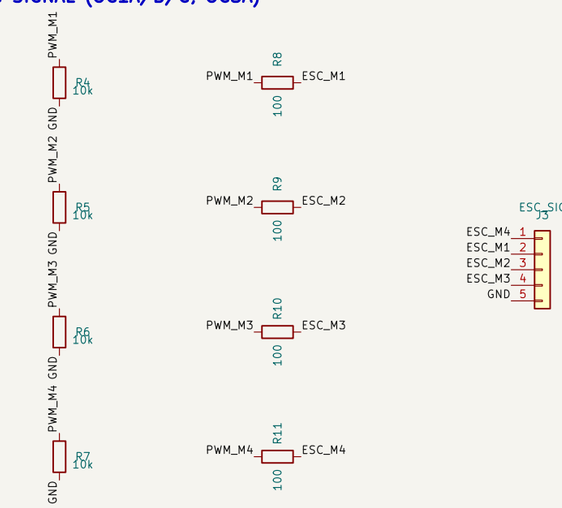

START BUTTON (SW2, PG3, internal pull-up) / STATUS LED (D2, PG4)



OPEN: J1 connector type; SW1, U1 footprints (measure first); D1 pinout (check purchased part datasheet)

Sheet: /
File: drone_v2.kicad_sch

Title: ATmega128 Quadcopter V2 — Autonomous Carrier PCB

Size: A3	Date: 2026-11-10	**Rev: V2 draft**
KiCad E.D.A. 10.0.6		Id: 1/1