


POWER (3S 12.6V to 5V). Motor current does not pass through this PCB

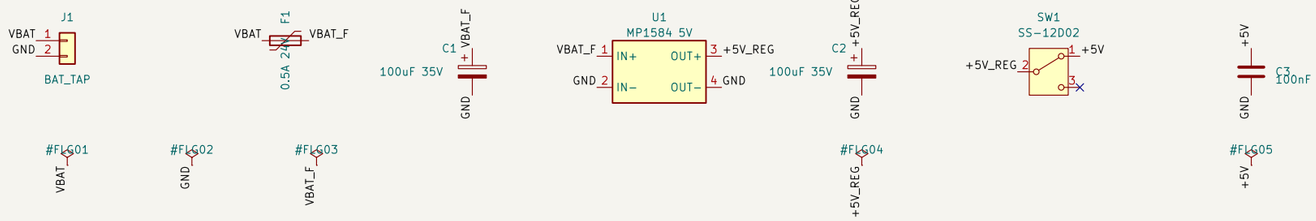

VBAT SENSE (PF0, 10k+10k/10k: 4.2V at full charge)

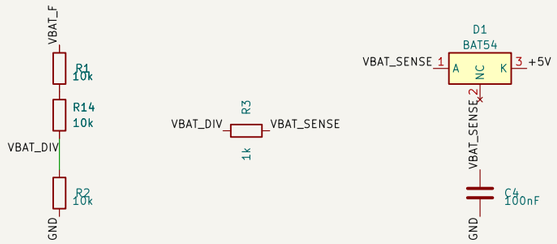


HC-SR04 (J2)




GY-521 (J5) — verify pin order on part: VCC GND SCL SDA XDA XCL ADO INT




ESC SIGNAL (OC1A/B/C, OC3A)

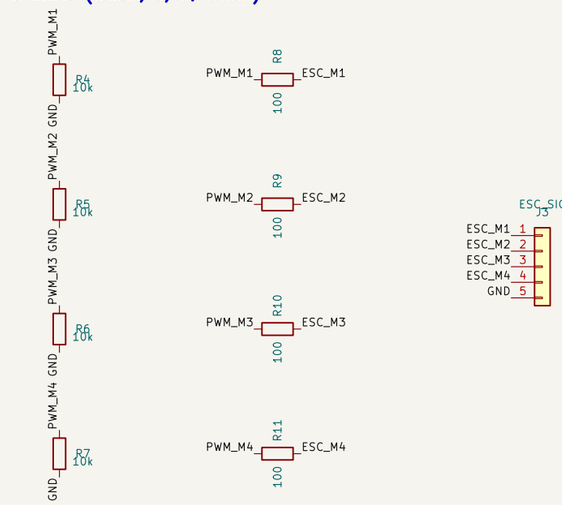


HC-06 (J4) — verify pin order on part: VCC GND TXD RXD



AT128A-70B SOCKET. Not used: PF4–7 (JTAG), PE0/PE1/PB1 (ISP), USART0

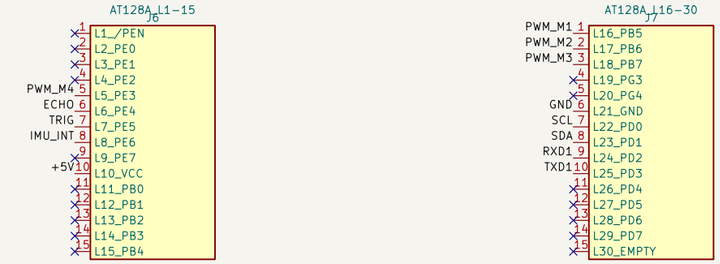

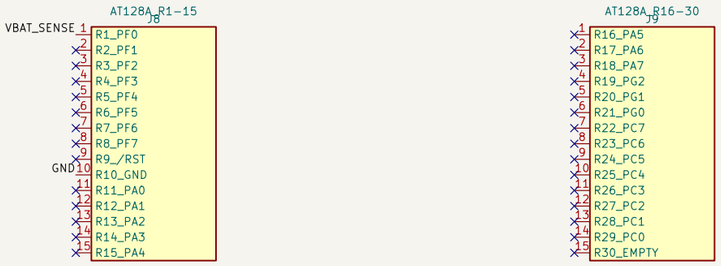

OPEN: J1 connector type; SW1, U1 footprints (measure first); D1 pinout (check purchased part datasheet)

Sheet: /	
File: drone_v1.kicad_sch	
Title: ATmega128 Quadcopter V1 — Carrier PCB	
Size: A3	Date: 2026-11-06
KiCad E.D.A. 10.0.7	Id: 1/1

Rev: V1 draft