

[SG5516:PH120] 双N比例验证




实验目的： 双N比例调节验证寿命；

实验结果： 基于SPGD508+SFGD5563组合，REF器件效率@3kint~243cd/A，J10电压~4.1V,寿命~52h；

N-host组分为SGH5516:PH120=7:3/6:4/5:5，器件效率分别~230 (-5%)/215(-11%)/210 (-13%)cd/A，J10电压暂无明显差异；寿命分别为78 (+50%)/86 (65%)/106h (+104%)

实验结论： SGH5549:SGH5516:PH120=5:(5:5)搭配PGD508寿命表现优异，后续作为长寿命高潜备案

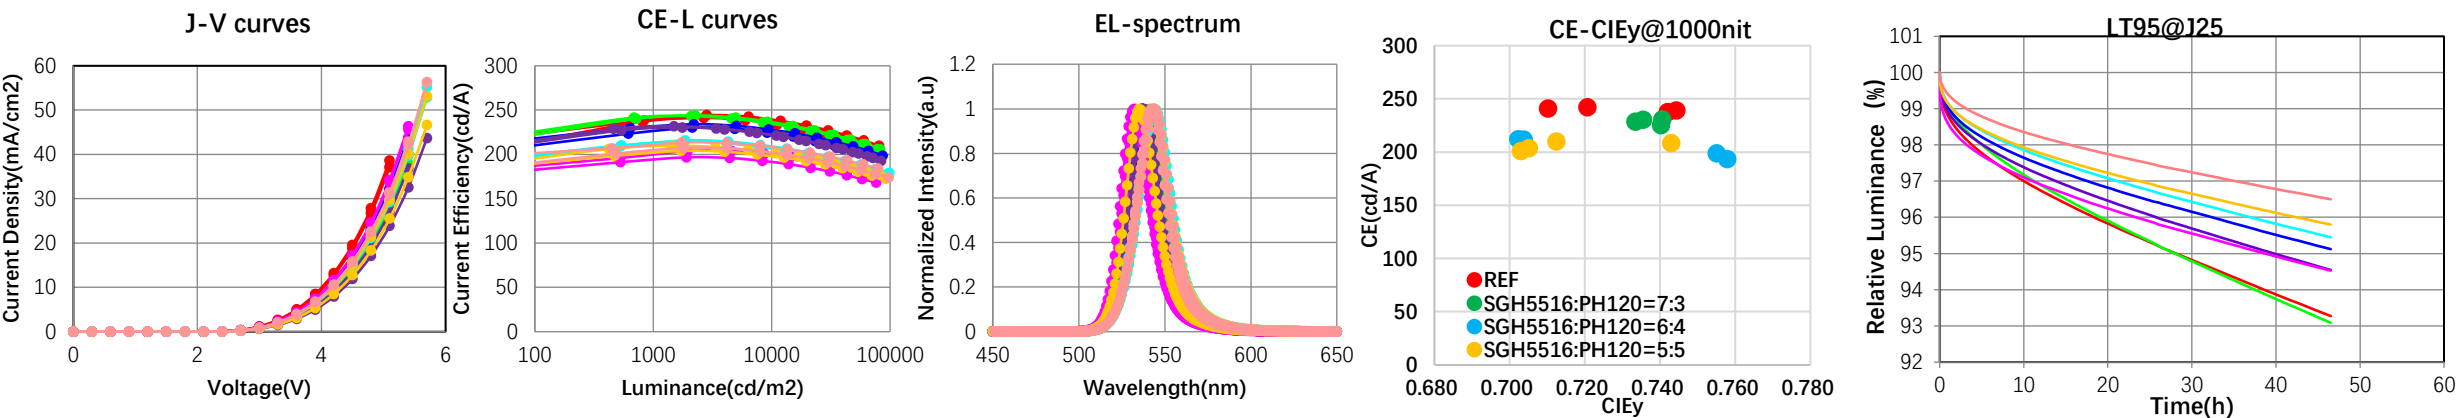

Device	Anode	HI	HT	EML	ET	Cathode	CPL	J10	@1000 nit								@3000nit			LT95
	15/110/75nm	PFA147=2:1 120℃ pre 15s 230℃ 30min	PFB258B=1:5 230℃ 30min N2	VD 5min 140℃ 20min	ETL:LiQ	Yb/Ag	CPL038	V(v)	CIE x	CIE y	J(mA/cm2)	V(v)	C.E.(cd/A)	EQE (%)	WP(nm)	FWHM(nm)	C.E.(cd/A)	EQE (%)	V(v)	@J25
1	IZO/Ag/IZO UV 2min	1700rpm 30s	1200rpm 30s	SGH5549:SGH5516=5:5 SPGD508:SFGD5563=12%:0.7%	LG1035:LiQ= 4:6 30nm	1/18nm	65nm	4.00	0.232	0.744	0.42	2.72	238.79	52.38	536	18.53	244.1	53.6	3.01	54
2								4.02	0.236	0.742	0.42	2.73	237.31	51.77	537	17.71	240.9	52.6	3.03	
3		1800rpm 30s		SGH5549:SGH5516:PH120=5:(7:3) SPGD508:SFGD5563=12%:0.7%				4.23	0.262	0.721	0.41	2.77	241.93	52.20	541	20.14	242.2	52.2	3.11	50
4								4.18	0.275	0.710	0.41	2.75	240.81	51.66	543	20.50	243.3	52.2	3.08	
5		1700rpm 30s		SGH5549:SGH5516:PH120=5:(6:4) SPGD508:SFGD5563=12%:0.7%				4.12	0.237	0.740	0.44	2.78	225.06	49.26	537	18.88	229.8	50.3	3.09	80
6								4.12	0.237	0.741	0.44	2.77	223.92	48.90	537	17.97	226.6	49.5	3.09	
7		1800rpm 30s		SGH5549:SGH5516:PH120=5:(5:5) SPGD508:SFGD5563=12%:0.7%				4.26	0.243	0.735	0.43	2.86	230.29	50.28	537	19.22	229.9	50.2	3.23	75
8								4.26	0.246	0.734	0.44	2.81	228.36	49.64	538	18.83	229.2	49.8	3.17	
		1700rpm 30s		SGH5549:SGH5516:PH120=5:(6:4) SPGD508:SFGD5563=12%:0.7%				4.20	0.283	0.702	0.47	2.81	211.66	45.49	544	22.67	213.3	45.9	3.15	90
								4.18	0.282	0.704	0.47	2.81	211.56	45.37	544	21.15	215.1	46.1	3.14	
		1800rpm 30s		SGH5549:SGH5516:PH120=5:(6:4) SPGD508:SFGD5563=12%:0.7%				4.09	0.211	0.758	0.51	2.80	193.07	43.51	532	19.58	196.4	44.3	3.13	82
								4.09	0.216	0.755	0.50	2.80	198.54	44.32	533	18.67	203.8	45.5	3.12	
		1700rpm 30s		SGH5549:SGH5516:PH120=5:(5:5) SPGD508:SFGD5563=12%:0.7%				4.18	0.283	0.703	0.49	2.83	200.68	43.13	544	21.83	203.4	43.7	3.17	108
								4.16	0.232	0.743	0.48	2.87	208.25	45.96	535	20.50	208.5	46.0	3.25	
		1800rpm 30s		SGH5549:SGH5516:PH120=5:(5:5) SPGD508:SFGD5563=12%:0.7%				4.15	0.280	0.705	0.49	2.82	203.37	43.66	544	21.80	207.0	44.4	3.15	105
								4.16	0.272	0.712	0.47	2.83	209.71	45.06	542	20.19	213.2	45.8	3.15	