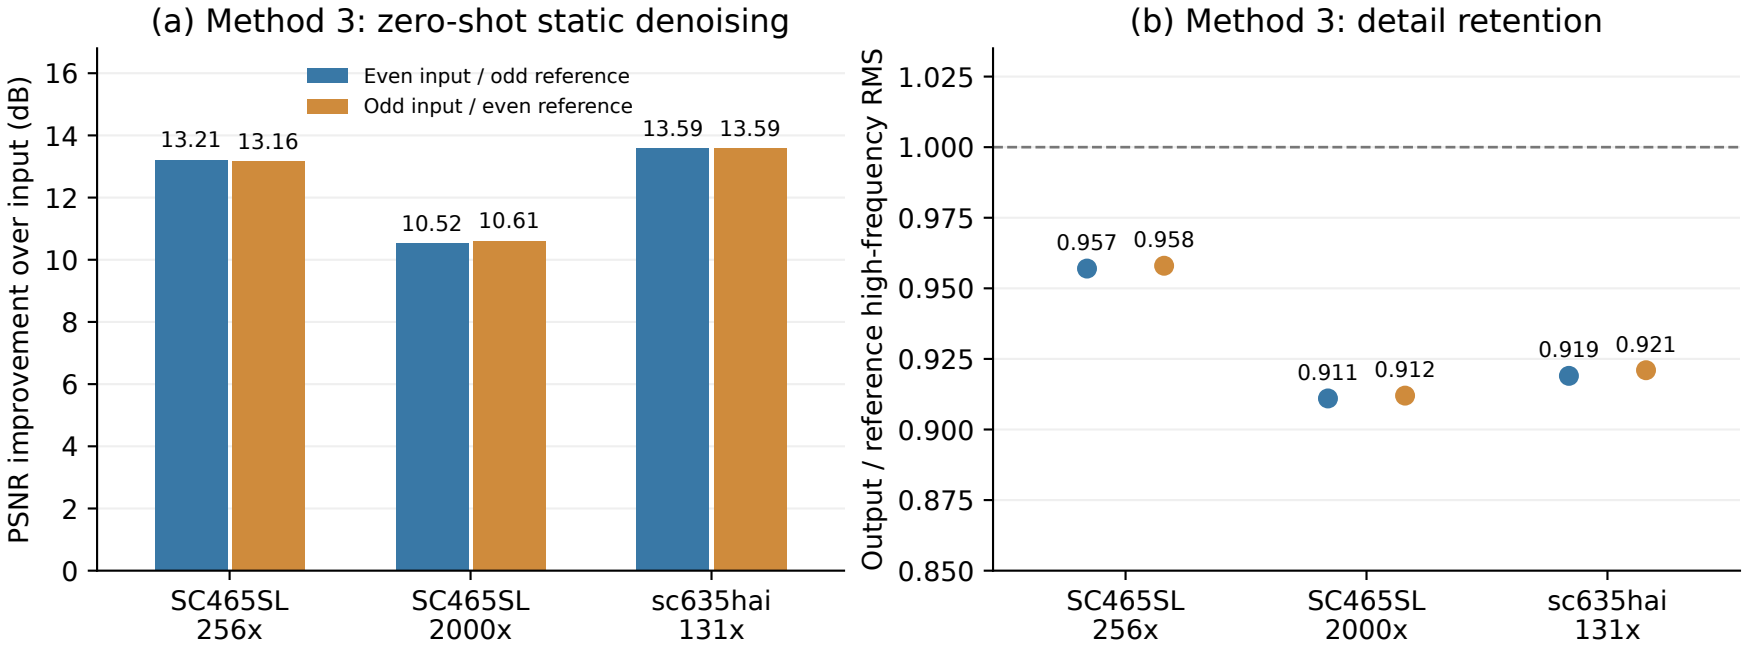
(a) Method 3: zero-shot static denoising
PSNR improvement over input (dB)
Even input / odd reference
Odd input / even reference
13.21
13.16
10.52
10.61
13.59
13.59
SC465SL 256x
SC465SL 2000x
sc635hai 131x
(b) Method 3: detail retention
Output / reference high-frequency RMS
0.957
0.958
0.911
0.912
0.919
0.921
SC465SL 256x
SC465SL 2000x
sc635hai 131x