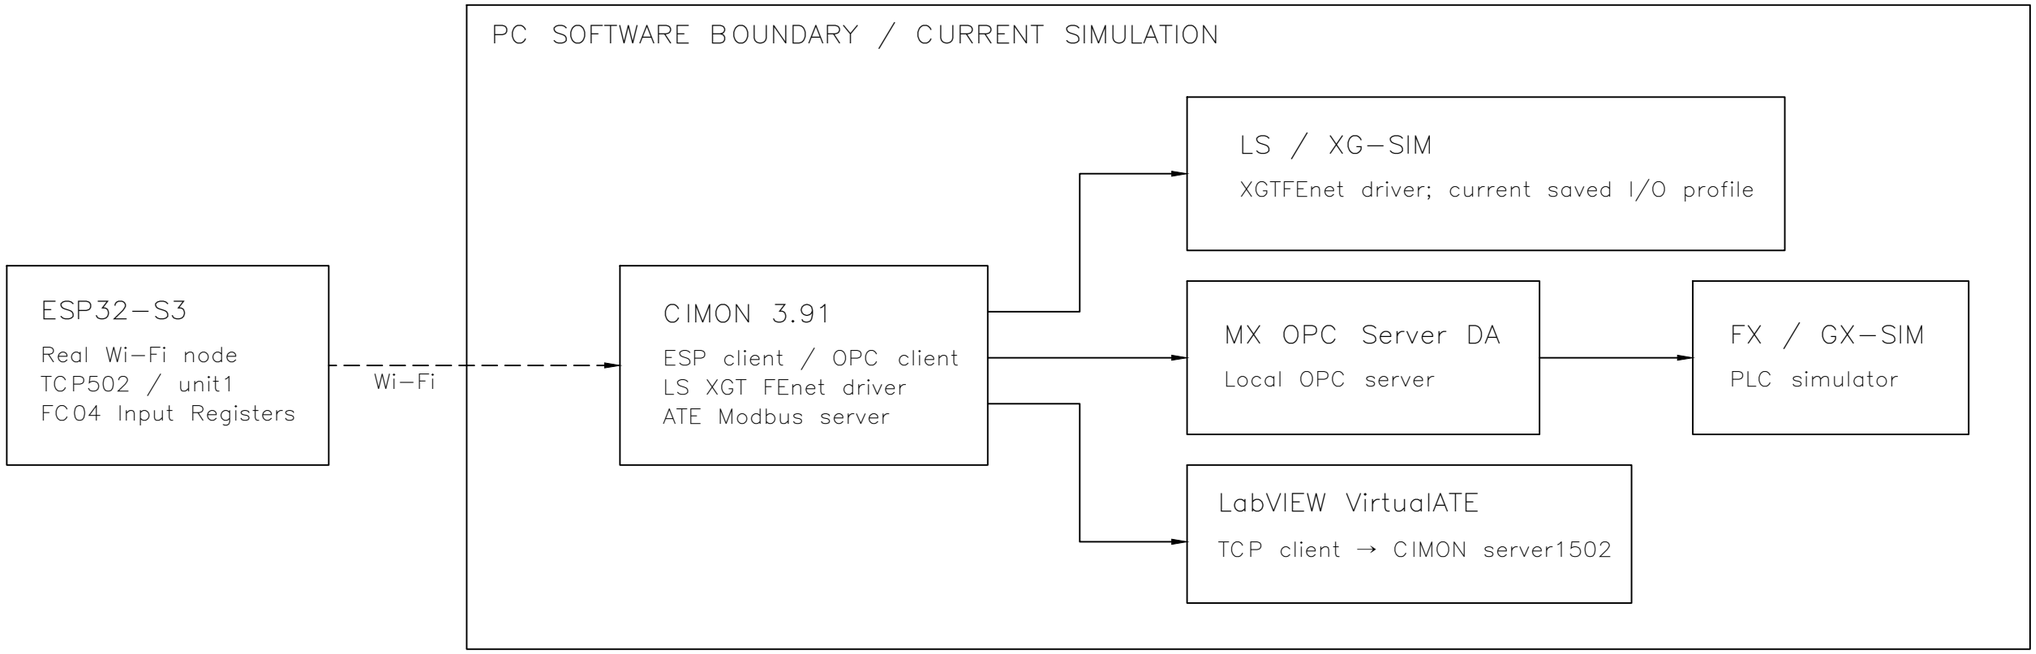


COMMUNICATION INTERFACE SUMMARY		
Path	Protocol / role	Address / purpose
ESP↔CIMON	ESP TCP server; CIMON client	502 / unit1 / FC04 / offsets0..23
LS↔CIMON	LS XGT Fast Ethernet driver ↔ XG-SIM	Driver configuration; not a claimed LS Modbus server
FX↔CIMON	GX Simulator ↔ MX OPC Server DA ↔ OPC client	Local OPC items; actual PLC D/M address bound per item
ATE↔CIMON	LabVIEW client ↔ CIMON Modbus TCP server	1502 / unit1 / FC03 read14 / FC16 payload + FC06 DONE
FX→LS	CIMON application bridge	FX D100 → LS D00400; LS D00401 read-back confirmation

Baseline BL-001: ESP IP 10.100.104.27 (DHCP), TCP 502, Unit 1.
FX OPC polling 500ms; CIMON FX update 500ms; Deadband 0.
See the BL-001 settings record for complete device configuration.
No direct LS-to-FX cable or physical LS Ethernet port is asserted.

NO.	DATE	REVISION
R0	2026-10-22	FUNCTION RECORD

DWG TITLE

SEMICON SORTER PROJECT
Final Test and Multi-Bin Sorting Cell

CURRENT COMMUNICATION NETWORK

DRAWN BY: J. H. KO
DATE: 2026-10-13

DWG NO: 003

SHEET NO: 1 OF 1