


a 60-s constant-current thermal stress scenario

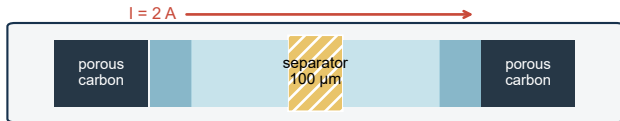


$$A = 100 \text{ cm}^2 \quad L = 100 \text{ } \mu\text{m} \quad V = 1.0 \text{ mL} \quad I = 2 \text{ A}$$

$$h = 10 \text{ W m}^{-2} \text{ K}^{-1} \quad N_f = 2 \quad t = 60 \text{ s}$$


Formal shortlist fixed $\rightarrow$ post hoc electrolyte-path interpretation.

No capacitance, safety, failure, or device-performance prediction.


b Resistance

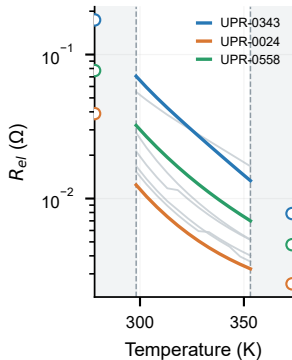


c Thermal-property map

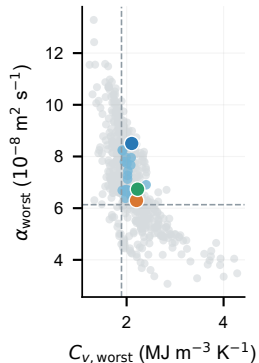

d Conditional ΔT_{60}

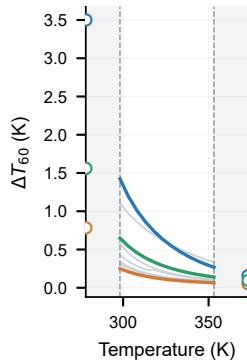

e Endpoint trade-off

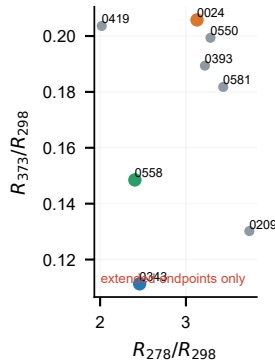

f Exceedance context

