
(2) PROVIDE 2HR RATED CEILING TO TRANSFER SHAFTS TO UPPER STACK SHAFT LOCATIONS \bigcirc (7) (0)

Architects ABC

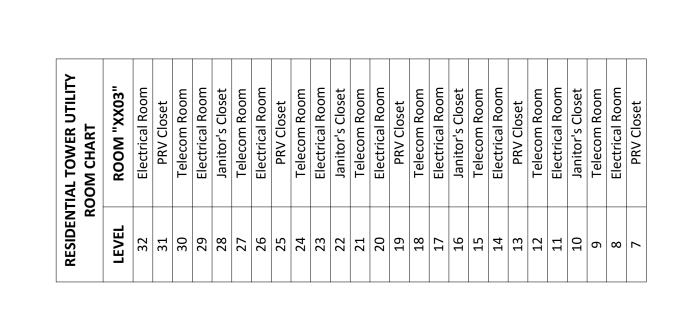

REFLECTED CEILING PLAN NOTES

CEILING HEIGHT GUIDE NOTE: CEILING HEIGHTS TYPICAL U.N.O.

| UNDERSIDE OF DECK ABOVE: 14' - 0" GYP CEILING: 12'-0" TOC | UNDERSIDE OF DECK ABOVE: 13' - 10" GYP CEILING: 10' -4" TOC** TYP. 8'-0" IN BATHROOM AND REACH-IN CLOSETS, 9'-0" IN WALK-IN CLOSETS | **UNITS L,M,N,J 9'-2" TOC | UNDERSIDE OF DECK ABOVE: 8' - 10" GYP CEILING: 7' - 10" TOC SKIM COAT CEILING: 8' - 10" TOC | UNDERSIDE OF DECK ABOVE: 10' - 10" |
|--|--|---------------------------|---|------------------------------------|
| LEVEL 33 | LEVEL 32 Transfer level | | LEVELS 27-31 | I FVFI 26 |

DATE

Š.

LEVEL 26 UNDERSIDE OF DECK ABOVE: 10' - 10" GYP CEILING: 8' - 0" TOC IN BATHROOMS AND REACH-IN CLOSETS, 9'-0" AT ALL OTHER GYP. LOCATIONS IN UNIT SKIM COAT CEILING: 10' - 10" TOC GYP CEILING: 7'- 10" TOC SKIM COAT CEILING: 8' - 10" LEVEL 06 UNDERSIDE OF DECK ABOVE: 8' - 10" GYP CEILING: 7'- 10" TOC SKIM COAT CEILING: 1'- 0" GYP CEILING: 12' -0" TOC

LEGEND

GYP-1 PLST-1: SKIM COAT PLASTER OVER STRUCTURAL SLAB ZHR RATED CEILING ENCLOSURE HR RATED CEILING ENCLOSURE

T 🔁

- UNDER CABINET LIGHT
 JUNCTION BOX
 PENDANT LIGHT
 6" ROUND FLUSH MOUNT
 SUPPLY REGISTER
 RETURN REGISTER/ EXHAUST FAN
 EXHAUST FAN/ LIGHT COMBO
- LEVEL 26 (TRANSFER FLOOR) REFLECTED CEILING PLAN CEILING ACCESS PANEL

□ LIT MIRROR

EXIT SIGN

LIGHT FRONTDIRECTIONOF ARROW

Drawn By:
Author
Checked By:
Checker
Project Number:
2015044

A7.06